



Informatica® Multidomain MDM  
10.4 HotFix 2

# Business Entity Services Guide

Informatica Multidomain MDM Business Entity Services Guide  
10.4 HotFix 2  
December 2020

© Copyright Informatica LLC 2014, 2021

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, the Informatica logo, and ActiveVOS are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at <https://www.informatica.com/trademarks.html>. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at [infa\\_documentation@informatica.com](mailto:infa_documentation@informatica.com).

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2021-01-12

# Table of Contents

<b>Preface</b> .....	<b>9</b>
Informatica Resources. ....	9
Informatica Network. ....	9
Informatica Knowledge Base. ....	9
Informatica Documentation. ....	9
Informatica Product Availability Matrices. ....	10
Informatica Velocity. ....	10
Informatica Marketplace. ....	10
Informatica Global Customer Support. ....	10
<b>Chapter 1: Introduction to Business Entity Services</b> .....	<b>11</b>
Business Entity Services Overview. ....	11
Business Entity Services. ....	12
ReadBE Business Entity Service. ....	12
WriteBE Business Entity Service. ....	12
SearchBE Business Entity Service. ....	12
Business Entity Service Endpoints. ....	13
EJB Endpoint for Business Entity Services. ....	13
REST Endpoint for Business Entity Services. ....	13
REST and EJB Business Entity Service Calls. ....	13
SOAP Endpoint for Business Entity Services. ....	14
Identifying a Root Record. ....	14
Security and Data Filters. ....	14
Certificate Based Authentication. ....	15
<b>Chapter 2: EJB Business Entity Service Calls</b> .....	<b>16</b>
EJB Business Entity Service Calls Overview. ....	16
Java Code Example with Standard SDO Classes. ....	16
Java Code Example with Generated SDO Classes. ....	20
<b>Chapter 3: REST Business Entity Service Calls</b> .....	<b>24</b>
REST APIs for Business Entity Services Overview. ....	24
Supported REST Methods. ....	25
Authentication Method. ....	25
Authentication Cookies for Login from Third-Party Applications. ....	25
Swagger. ....	26
REST Uniform Resource Locator. ....	26
Header and Body Configuration. ....	27
Request Header. ....	28
Request Body. ....	28

Standard Query Parameters. . . . .	30
Formats for Dates and Time in UTC. . . . .	30
Configuring WebLogic to Run Business Entity Service REST Calls. . . . .	31
Viewing Input and Output Parameters. . . . .	32
JavaScript Template. . . . .	32
JavaScript Example. . . . .	33
REST API Reference for Business Entity Services . . . . .	35
Get Metadata . . . . .	35
List Metadata. . . . .	38
List Match Columns. . . . .	43
Read Record. . . . .	44
Create Record. . . . .	50
Update Record. . . . .	53
Delete Record. . . . .	56
List Record. . . . .	57
Search Record. . . . .	59
Suggester. . . . .	64
SearchQuery. . . . .	65
SearchMatch. . . . .	69
Get BPM Metadata. . . . .	74
List Tasks. . . . .	75
Read Task. . . . .	80
Create Task. . . . .	82
Update Task. . . . .	85
Task Complete. . . . .	88
Execute Task Action. . . . .	90
List Assignable Users. . . . .	92
Bulk Claim Tasks. . . . .	93
Bulk Release Tasks. . . . .	94
Bulk Assign Tasks. . . . .	96
Bulk Edit Tasks. . . . .	97
Bulk Task Action. . . . .	99
Get Task Actions. . . . .	101
List Potential Owners for Tasks. . . . .	103
List Potential Owners for a Task. . . . .	104
List File Metadata. . . . .	105
Create File Metadata. . . . .	106
Get File Metadata. . . . .	107
Update File Metadata. . . . .	108
Upload File Content. . . . .	109
Get File Content. . . . .	110
Delete File. . . . .	110

Preview Replaced Records. . . . .	111
Update Find and Replace. . . . .	115
Import New File. . . . .	117
Import Matched File . . . . .	118
Get File Properties. . . . .	119
Save File Properties. . . . .	120
Return File Properties. . . . .	122
Preview Parsed Files. . . . .	123
Get Parsed Files. . . . .	124
Import File Parsing Errors. . . . .	125
Import File Loading Errors. . . . .	126
Preview Promote. . . . .	127
Promote. . . . .	129
Delete Pending. . . . .	129
Preview Merge. . . . .	130
Update Pending Merge. . . . .	133
Pending Merge. . . . .	135
PromoteMerge. . . . .	136
File Transformation. . . . .	137
Suggest Mapping. . . . .	139
Merge Records. . . . .	140
Unmerge Records. . . . .	142
Create Mapping. . . . .	143
Preview Mapping. . . . .	145
Find Mapping. . . . .	147
Read Mapping. . . . .	148
Update Mapping. . . . .	150
File Transformation. . . . .	152
Read a Relationship. . . . .	154
Create a Relationship. . . . .	156
Update a Relationship. . . . .	158
Delete a Relationship. . . . .	159
Get Related Records. . . . .	160
Export Related Business Entities. . . . .	164
List Hierarchies. . . . .	164
Get Hierarchy Metadata. . . . .	165
Get Hierarchy Path. . . . .	170
Get Parents. . . . .	173
Get Children. . . . .	175
Export Hierarchy. . . . .	182
Export Direct Children and Parents. . . . .	183
Get Hierarchy Changes. . . . .	184

Bulk Relationship Changes. . . . .	190
Bulk Promote. . . . .	193
Bulk Reject. . . . .	199
Start Match. . . . .	202
Read Matched Records. . . . .	203
Update Matched Records. . . . .	204
Delete Matched Records. . . . .	205
Get Match Data in CSV. . . . .	206
Get Match Data in JSON. . . . .	207
Import Matched File . . . . .	209
Get Source System Metadata . . . . .	210
Get Record History Events. . . . .	212
Get Event Details. . . . .	215
List Reports. . . . .	216
Get Report Configuration and Data. . . . .	218
Get Report Configuration and Drilldown Reports. . . . .	220
Register Report. . . . .	222
Update Report Configuration. . . . .	223
Add or Update Report Data. . . . .	224
Delete Report. . . . .	225
Run Report Update Job. . . . .	226
Get Status of Report Update Job. . . . .	227
List Job Groups . . . . .	228
List a Job Group. . . . .	230
Get DaaS Metadata. . . . .	231
DaaS Search . . . . .	232
DaaS Read. . . . .	237
WriteMerge. . . . .	238
DaaS Import. . . . .	240
DaaS Update. . . . .	243
<b>Chapter 4: SOAP Business Entity Service Calls.....</b>	<b>246</b>
SOAP Calls for Business Entity Services Overview. . . . .	246
Authentication method. . . . .	247
Authentication Cookies for Login from Third-Party Applications. . . . .	247
Web Services Description Language File. . . . .	248
SOAP URL. . . . .	249
SOAP Requests and Responses. . . . .	249
Viewing Input and Output Parameters. . . . .	250
SOAP API Reference. . . . .	251
Sample SOAP Request and Response. . . . .	253

<b>Chapter 5: Cross-reference Records and BVT Calculations Services.....</b>	<b>254</b>
Cross-reference Records and BVT Calculations Services Overview. . . . .	254
Getting Cross-reference Data and Investigating BVT Calculations. . . . .	254
Get Cross-reference Records. . . . .	255
Determine Contributors to the Master Record. . . . .	255
Get the Trust Scores of Contributing Cross-reference Record Fields. . . . .	256
Getting the Trust Scores of All Cross-reference Record Fields. . . . .	256
Get Information about Source Systems. . . . .	257
Get Information about Source Systems Example. . . . .	257
Filtering and Paginating Responses. . . . .	258
Filtering Request Examples. . . . .	258
Establish the Best Version of the Truth. . . . .	259
Select the Correct Contributing Field. . . . .	259
Select the Correct Contributing Field Example. . . . .	259
Write the Correct Value to the Master Record. . . . .	260
Write the Correct Value to the Master Record Example. . . . .	261
Remove Mismatched Source Data. . . . .	262
Remove Mismatched Source Data Example. . . . .	263
Unmerge Response. . . . .	264
<b>Chapter 6: Supporting Corporate Linkage Service.....</b>	<b>265</b>
Overview. . . . .	265
Business Entity Services for DaaS Import and Update. . . . .	265
Configuring Linkage Support. . . . .	266
Custom Application for Linkage Data Splitting. . . . .	266
<b>Chapter 7: External Calls to Cleanse, Analyze, and Transform Data.....</b>	<b>267</b>
Overview. . . . .	267
Supported Events. . . . .	268
How to Configure External Calls. . . . .	268
Example: Custom Validation and Logic for Business Entity Services. . . . .	269
Prerequisites. . . . .	269
Step 1. Test Custom Validation. . . . .	269
Step 2. Test Custom Logic. . . . .	270
<b>Appendix A: Using REST APIs to Add Records.....</b>	<b>275</b>
Using REST APIs to Add Records Overview. . . . .	275
Person Business Entity Structure. . . . .	276
Step 1. Get Information about the Schema. . . . .	276
Get Metadata Response. . . . .	277
Step 2. Create a Record. . . . .	282
Create Record Response. . . . .	283

Step 3. Read the Record. . . . .	284
Read the Record Response. . . . .	285
<b>Appendix B: Using REST APIs to Upload Files. . . . .</b>	<b>289</b>
Using REST APIs to Upload Files Overview. . . . .	289
REST APIs for Files. . . . .	289
File Components. . . . .	290
Storage Types. . . . .	290
Attaching Files to Records. . . . .	291
Attaching Files to Tasks. . . . .	293
Uploading Resource Bundle Files. . . . .	295
<b>Appendix C: Using REST APIs to Manage Reports. . . . .</b>	<b>297</b>
Using REST APIs to Manage Reports Overview. . . . .	297
REST APIs for Reports. . . . .	298
Report Configuration. . . . .	298
Report Data. . . . .	299
Drilldown Reports. . . . .	300
Out of the Box Reports. . . . .	301
Managing the Out of the Box Reports. . . . .	301
Custom Reports. . . . .	304
Managing Custom Reports. . . . .	304
Managing Custom Reports with Drilldown Reports. . . . .	306
Troubleshooting Report APIs. . . . .	309
<b>Index. . . . .</b>	<b>310</b>



# Preface

See the Informatica® *Multidomain MDM Business Entity Services Guide* to learn about the business entity services available as web services. Use the guide to learn how to use Enterprise JavaBeans (EJB), Representational State Transfer (REST), Simple Object Access Protocol (SOAP), and external web service calls to perform operations on business entity data. You can also learn to configure custom user interfaces to make business entity service calls.

## Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

### Informatica Network

The Informatica Network is the gateway to many resources, including the Informatica Knowledge Base and Informatica Global Customer Support. To enter the Informatica Network, visit <https://network.informatica.com>.

As an Informatica Network member, you have the following options:

- Search the Knowledge Base for product resources.
- View product availability information.
- Create and review your support cases.
- Find your local Informatica User Group Network and collaborate with your peers.

### Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit <https://search.informatica.com>. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at [KB\\_Feedback@informatica.com](mailto:KB_Feedback@informatica.com).

### Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit <https://docs.informatica.com>.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at [infa\\_documentation@informatica.com](mailto:infa_documentation@informatica.com).

## Informatica Product Availability Matrices

Product Availability Matrices (PAMs) indicate the versions of the operating systems, databases, and types of data sources and targets that a product release supports. You can browse the Informatica PAMs at <https://network.informatica.com/community/informatica-network/product-availability-matrices>.

## Informatica Velocity

Informatica Velocity is a collection of tips and best practices developed by Informatica Professional Services and based on real-world experiences from hundreds of data management projects. Informatica Velocity represents the collective knowledge of Informatica consultants who work with organizations around the world to plan, develop, deploy, and maintain successful data management solutions.

You can find Informatica Velocity resources at <http://velocity.informatica.com>. If you have questions, comments, or ideas about Informatica Velocity, contact Informatica Professional Services at [ips@informatica.com](mailto:ips@informatica.com).

## Informatica Marketplace

The Informatica Marketplace is a forum where you can find solutions that extend and enhance your Informatica implementations. Leverage any of the hundreds of solutions from Informatica developers and partners on the Marketplace to improve your productivity and speed up time to implementation on your projects. You can find the Informatica Marketplace at <https://marketplace.informatica.com>.

## Informatica Global Customer Support

You can contact a Global Support Center by telephone or through the Informatica Network.

To find your local Informatica Global Customer Support telephone number, visit the Informatica website at the following link:

<https://www.informatica.com/services-and-training/customer-success-services/contact-us.html>.

To find online support resources on the Informatica Network, visit <https://network.informatica.com> and select the eSupport option.

# CHAPTER 1

## Introduction to Business Entity Services

This chapter includes the following topics:

- [Business Entity Services Overview, 11](#)
- [Business Entity Services, 12](#)
- [Business Entity Service Endpoints, 13](#)
- [Identifying a Root Record, 14](#)
- [Security and Data Filters, 14](#)
- [Certificate Based Authentication, 15](#)

## Business Entity Services Overview

A business entity service is a set of operations that run MDM Hub code to create, update, delete, and search for base object records in a business entity. You can develop a custom user interface that can run Java code or JavaScript code to make business entity service calls.

For example, you can create a business entity service to augment a supplier record with Dun and Bradstreet data. Configure the business entity service to take the supplier record as an input, retrieve some information from Dun and Bradstreet, update the record, and then output the updated supplier record.

Base objects in a business entity have the following business entity services:

### **Read**

Each business entity has a business entity service to perform a read operation.

### **Write**

Each business entity has a business entity service to perform a write operation.

### **Search**

Any business entity that has searchable fields has a business entity service to perform a search operation.

For example, a Person business entity has searchable fields. The MDM Hub generates a ReadPerson, WritePerson, and SearchPerson business entity service. The read, write, and search business entity service steps allow you to read, create, update, delete, and search for records in a business entity.

# Business Entity Services

A business entity service performs an operation. You can use the ReadBE, WriteBE, and SearchBE business entity services.

A business entity service has service steps. An incoming request passes through each service step. The output of one step is an input for the next step. The output of a step can pass information to the input of the following step. All business entity service steps run as one Enterprise JavaBeans (EJB) call in a single transaction. The MDM Hub handles exceptions.

**Note:** Before you use the business entity services, validate the Operational Reference Store.

## ReadBE Business Entity Service

The ReadBE business entity service reads data from a base object record in a business entity.

You can specify pagination parameters with the ReadBE step to set the number of records to return and the page of results to view.

The results of the ReadBE service do not include soft-deleted records.

If you do not pass the EffectiveDate parameter in the business entity service request, the MDM Hub assumes a NULL effective date and the business entity service reads data from the base object. If you pass the EffectiveDate parameter, the MDM Hub calculates the best version of the truth from cross-reference records and the read business entity service returns the up-to-date best version of the truth.

## WriteBE Business Entity Service

The WriteBE business entity service can update the data in a business entity element, create a child business entity element, or delete child business entity elements.

**Note:** The WriteBE business entity service uses existing trust settings to calculate trust on base objects. You cannot perform a trust override with this service.

### Optional Parameters

The following table describes optional parameters that you can use with the WriteBE business entity service:

Parameter	Description
recordState	Set the record state to ACTIVE, PENDING, or DELETED. <b>Note:</b> When you set <code>recordState=ACTIVE</code> and you run the service on a soft-deleted record, the service restores the record to the active state.
EffectivePeriod	Specify an effective period. If you do not pass the <code>EffectivePeriod</code> parameter, the MDM Hub assumes an unbounded period. The MDM Hub does not check that there is alignment for effective periods between the root objects and child objects. When you create or update records, ensure the effective periods of the parent record and child records align.

## SearchBE Business Entity Service

Use the SearchBE business entity service to search for a root record in a business entity.

For information on configuring business entities for search, see the *Multidomain MDM Configuration Guide*.

# Business Entity Service Endpoints

You can access business entity services through an Enterprise JavaBeans (EJB) endpoint, a Representational State Transfer (REST) endpoint, or a Simple Object Access Protocol (SOAP) endpoint.

REST endpoints are built upon an EJB standpoint. The REST business entity service configuration defines how the REST URLs are mapped to the EJB business entity service calls.

## EJB Endpoint for Business Entity Services

The Enterprise JavaBeans (EJB) endpoint is the underlying endpoint for all types of business entity service calls. All other endpoints are mapped to the EJB endpoint

Business entity services are exposed as a stateless EJB. A stateless EJB container can pool instances, allocate instances, and apply load balancing strategies to distribute the load across different servers within the domain.

An EJB endpoint accepts a user name and password for authentication.

## REST Endpoint for Business Entity Services

Representational State Transfer Endpoint (REST) calls make business entity services available as web services.

The MDM Hub uses Swagger to list all the REST web services with URLs and parameters.

You can access Swagger with the following URL:


```
http://<host>:<port>/cmx/swagger-ui.html
```

## REST and EJB Business Entity Service Calls

When you make a business entity service call, you might specify certain child branches instead of requesting the whole business entity.

For example, you want to perform a read operation on a business entity that has a Person root node and multiple child branches. The Person base object has Address, Phone, and Email child base objects. Each child base object has two grandchild base objects.

The following image shows the structure of a business entity with multiple branches:

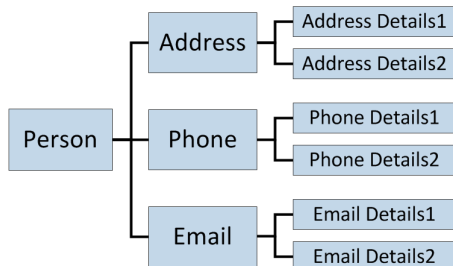

You can read from multiple child branches at various depths in a single request. For example, you can read Person, Phone, Phone Details1, Phone Details 2, Email, and Email Details 2 in a single request.

The following URL sample shows how to make a REST read request to get the Person record with row ID 1242, in addition to the Address Details 1 and Email child records:

```
http://localhost:8080/cmx/cs/localhost-ORCL-DS_UI1/Person/1242?children=Address/  
Address_Details_1,Email
```

## SOAP Endpoint for Business Entity Services

Simple Object Access Protocol (SOAP) endpoint calls make business entity services available as web services.

Web Services Description Language (WSDL) files contain the XML descriptions of the web services, formats of the SOAP requests and responses, and all parameters. The MDM Hub generates a WSDL file for each Operational Reference Store.

## Identifying a Root Record

You can use one of the following approaches to identify a root record:

- `rowid`. The value in the `ROWID_OBJECT` column of the record.
- `systemName` and `sourceKey`. The `systemName` is the name of the system to which the record belongs. The `sourceKey` is the value in the `PKEY_SRC_OBJECT` column of the record.
- Global Business Identifier (GBID) of an object. A GBID can be a compound value, in which case you must pass all the values.

**Note:** The GBID approach works only with the ReadBE service.

The following sample code uses the `systemName` and `sourceKey` to identify a record:

```
String systemName = "SFA";

Properties config = new Properties();
config.put(SiperianClient.SIPERIANCLIENT_PROTOCOL, EjbSiperianClient.PROTOCOL_NAME);
CompositeServiceClient client = CompositeServiceClient.newCompositeServiceClient(config);
CallContext callContext = new CallContext(orsId, user, pass);
helperContext = client.getHelperContext(callContext);
DataFactory dataFactory = helperContext.getDataFactory();

//String personRowId = "1097";
String pkeySrcObject = "CST1379";

//Set custom key pkey
pkey = (Key) dataFactory.create(Key.class);
pkey.setSystemName(systemName);
pkey.setSourceKey(val);
writePerson.setKey(pkey);
```

## Security and Data Filters

When base objects and resources have user role privileges, the business entity inherits those privileges. To access business entity records, the user role must have the appropriate privileges to the root base object for the business entity as well as other resources.

The business entity services also inherit any data filters that you set on business entity fields.

For more information about security and data filters, see the *Multidomain MDM Provisioning Tool Guide*.

# Certificate Based Authentication

The MDM Hub uses a certificate-based authentication mechanism for securing the authentication between the MDM Hub components and trusted applications. The authentication mechanism is also supported for the Business Entity Services APIs.

External client applications can make business entity service requests to the MDM Hub. You must register the external client application users as trusted application users in the MDM Hub. You must also register the public certificate for the users associated with the external client application.

After registration, the external client users can send encrypted authentication requests to the MDM Hub using the private key. The MDM Hub decrypts the authentication request using the public key and responds with requested data in plain text.

User authentication requests for Business Entity Services payload are encrypted using the private key and are decrypted using the public key.

**Note:** To register the public key and the certificate with the MDM Hub, contact Informatica Global Customer Support.

For more information about how to configure trusted applications and certificate based authentication, see the Certificate Based Authentication chapter in the Informatica Multidomain MDM 10.4 Security Guide.

## CHAPTER 2

# EJB Business Entity Service Calls

This chapter includes the following topics:

- [EJB Business Entity Service Calls Overview, 16](#)
- [Java Code Example with Standard SDO Classes, 16](#)
- [Java Code Example with Generated SDO Classes, 20](#)

## EJB Business Entity Service Calls Overview

You can make Enterprise JavaBeans (EJB) business entity service calls to create, update, delete, and search for base object records in a business entity. You can create Java code to run EJB business entity service calls.

You can create Java code based on standard Service Data Objects (SDO) classes or you can create Java code based on java classes that the MDM Hub generates based on the business entity and business entity services configuration.

## Java Code Example with Standard SDO Classes

The example shows Java code to run Enterprise JavaBeans (EJB) calls based on standard Service Data Objects (SDO) classes.

The example is in the following file in the resource kit: C:\<MDM Hub installation directory>\hub\resourcekit\samples\COS\source\java\com\informatica\mdm\sample\cs\DynamicSDO.java

The following Java code is based on standard SDO classes and runs EJB business entity service calls to create a Person base object record, add multiple child records, delete one child record, and then delete the person record and all child records:

```
package com.informatica.mdm.sample.cs;

import com.informatica.mdm.cs.CallContext;
import com.informatica.mdm.cs.api.CompositeServiceException;
import com.informatica.mdm.cs.client.CompositeServiceClient;
import com.siperian.sif.client.EjbSiperianClient;
import com.siperian.sif.client.SiperianClient;
import commonj.sdo.DataObject;
import commonj.sdo.Property;
import commonj.sdo.Type;
import commonj.sdo.helper.DataFactory;
import commonj.sdo.helper.HelperContext;
```



```

import java.io.PrintStream;
import java.util.Arrays;
import java.util.Properties;

public class DynamicSDO {

    public static void main(String[] args) throws CompositeServiceException {

        if(args.length != 3) {
            System.err.println("USAGE: DynamicSDO <ors> <user> <pass>");
            return;
        }

        new DynamicSDO(args[0], args[1], args[2]).execute();

    }

    private String orsId;
    private String user;
    private String pass;
    private HelperContext helperContext;
    private PrintStream out = System.out;

    public DynamicSDO(String orsId, String user, String pass) {
        this.orsId = orsId;
        this.user = user;
        this.pass = pass;
    }

    public void execute() throws CompositeServiceException {

        String systemName = "Admin";

        Properties config = new Properties();
        config.put(SiperianClient.SIPERIANCLIENT_PROTOCOL,
EjbSiperianClient.PROTOCOL_NAME);
        CompositeServiceClient client =
CompositeServiceClient.newCompositeServiceClient(config);

        CallContext callContext = new CallContext(orsId, user, pass);

        helperContext = client.getHelperContext(callContext);

        DataFactory dataFactory = helperContext.getDataFactory();

        // types for Read requests
        Type coFilterType = helperContext.getTypeHelper().getType("urn:cs-
base.informatica.mdm", "CoFilter");
        Type coFilterNodeType = helperContext.getTypeHelper().getType("urn:cs-
base.informatica.mdm", "CoFilterNode");
        Type keyType = helperContext.getTypeHelper().getType("urn:cs-
base.informatica.mdm", "Key");

        // ReadCO & WriteCO request types
        Type readPersonType = helperContext.getTypeHelper().getType("urn:cs-
ors.informatica.mdm", "ReadPerson");
        Type writePersonType = helperContext.getTypeHelper().getType("urn:cs-
ors.informatica.mdm", "WritePerson");

        // 1. Create new person
        DataObject createPerson = dataFactory.create(writePersonType);
        DataObject createPersonParameters = createPerson.createDataObject("parameters");
        createPersonParameters.setString("systemName", systemName);
        DataObject person = createPerson.createDataObject("object");

        person.getChangeSummary().beginLogging();

        DataObject personRoot = person.createDataObject("Person");
        personRoot.setString("firstName", "John");
        personRoot.setString("lastName", "Smith");
    }
}

```

```

person.getChangeSummary().endLogging();

dump("*** CREATE NEW PERSON ...", createPerson);

DataObject createPersonResponse = client.process(callContext, createPerson);

dump("*** PERSON CREATED:", createPersonResponse);

String personRowId = createPersonResponse.getString("object/Person/rowidObject");

DataObject readPerson = dataFactory.create(readPersonType);
DataObject readPersonParameters = readPerson.createDataObject("parameters");
DataObject coFilter = readPersonParameters.createDataObject("coFilter");
DataObject coFilterNode = coFilter.createDataObject("object");
coFilterNode.set("name", "Person");
DataObject key = coFilterNode.createDataObject("key");
key.set("rowid", personRowId);

dump("*** READ CREATED PERSON...", readPerson);

DataObject readPersonResponse = client.process(callContext, readPerson);

dump("*** READ RESULT:", readPersonResponse);

person = readPersonResponse.getDataObject("object");
person.detach();

person.getChangeSummary().beginLogging();

personRoot = person.getDataObject("Person");
// add new 'one' child
DataObject genderCd = personRoot.createDataObject("genderCd");
genderCd.setString("genderCode", "M");

// add two 'many' children
DataObject phonePager = personRoot.createDataObject("TelephoneNumbers");
Property item = phonePager.getInstanceProperty("item");
Type phoneType = item.getType();

DataObject phone1 = dataFactory.create(phoneType);
phone1.setString("phoneNumber", "111-11-11");
DataObject phone2 = dataFactory.create(phoneType);
phone2.setString("phoneNumber", "222-22-22");

phonePager.setList(item, Arrays.asList(phone1, phone2));

person.getChangeSummary().endLogging();

DataObject updatePerson = dataFactory.create(writePersonType);
updatePerson.setDataObject("object", person);
DataObject updatePersonParameters = updatePerson.createDataObject("parameters");
updatePersonParameters.setString("systemName", systemName);
updatePersonParameters.setString("interactionId", "");

dump("*** UPDATE PERSON...", updatePerson);

DataObject updatePersonResponse = client.process(callContext, updatePerson);

dump("*** PERSON UPDATED:", updatePersonResponse);

coFilterNode.set("depth", 3);

readPersonParameters.setBoolean("readSystemFields", true);

dump("*** READ UPDATED PERSON WITH CHILDREN...", readPerson);

readPersonResponse = client.process(callContext, readPerson);

dump("*** READ RESULT:", readPersonResponse);

```

```

person = readPersonResponse.getDataObject("object");
person.detach();

person.getChangeSummary().beginLogging();

genderCd = person.getDataObject("Person").createDataObject("genderCd");
genderCd.setString("genderCode", "F");

// delete one phone
DataObject phoneItem = person.getDataObject("Person/TelephoneNumbers/item[1]");
phoneItem.delete();

person.getChangeSummary().endLogging();

DataObject deletePhone = dataFactory.create(writePersonType);
deletePhone.setDataObject("object", person);
DataObject deletePhoneParameters = deletePhone.createDataObject("parameters");
deletePhoneParameters.setString("systemName", systemName);

dump("*** DELETE CHILD...", deletePhone);

DataObject deletePhoneResponse = client.process(callContext, deletePhone);

dump("*** CHILD DELETED:", deletePhoneResponse);

readPersonParameters.setBoolean("readSystemFields", false);

dump("*** READ PERSON AFTER CHILD WAS DELETED...", readPerson);

readPersonResponse = client.process(callContext, readPerson);

dump("*** READ RESULT:", readPersonResponse);

person = readPersonResponse.getDataObject("object");
person.detach();

person.getChangeSummary().beginLogging();

person.getDataObject("Person").detach();

person.getChangeSummary().endLogging();

DataObject deletePerson = dataFactory.create(writePersonType);
deletePerson.setDataObject("object", person);
DataObject deletePersonParameters = deletePerson.createDataObject("parameters");
deletePersonParameters.setString("systemName", systemName);

dump("*** DELETE PERSON...", deletePerson);

DataObject deletePersonResponse = client.process(callContext, deletePerson);

dump("*** PERSON DELETED:", deletePersonResponse);

dump("*** TRY TO READ PERSON AFTER DELETE", readPerson);

try {
    readPersonResponse = client.process(callContext, readPerson);

    dump("*** READ RESULT:", readPersonResponse);
} catch (CompositeServiceException e) {
    out.println("*** READ RESULT: " + e.getLocalizedMessage());
}

}

private void dump(String title, DataObject dataObject) {
    String xml = helperContext.getXMLHelper().save(
        dataObject,
        dataObject.getType().getURI(),
        dataObject.getType().getName());
}

```

```

        out.println(title);
        out.println(xml);
        out.println();
    }
}

```

## Java Code Example with Generated SDO Classes

The example shows Java code to run Enterprise JavaBeans (EJB) calls based on Java classes that the MDM Hub generates based on the business entity and business entity services configuration.

The example is in the following file in the resource kit: C:\<MDM Hub installation directory>\hub\resourcekit\samples\COS\source\java\com\informatica\mdm\sample\cs\GeneratedSDO.java

The following Java code is based on generated classes and runs EJB business entity service calls to create a person base object record, add multiple child records, delete one child record, and then delete the person record and all child records:

```

package com.informatica.mdm.sample.cs;

import com.informatica.mdm.cs.CallContext;
import com.informatica.mdm.cs.api.CompositeServiceException;
import com.informatica.mdm.cs.client.CompositeServiceClient;
import com.informatica.mdm.sdo.cs.base.CoFilter;
import com.informatica.mdm.sdo.cs.base.CoFilterNode;
import com.informatica.mdm.sdo.cs.base.Key;
import com.siperian.sif.client.EjbSiperianClient;
import com.siperian.sif.client.SiperianClient;
import commonj.sdo.DataObject;
import commonj.sdo.helper.DataFactory;
import commonj.sdo.helper.HelperContext;
import mdm.informatica.co_ors.*;
import mdm.informatica.cs_ors.*;

import java.io.PrintStream;
import java.util.Arrays;
import java.util.Properties;

public class GeneratedSDO {

    public static void main(String[] args) throws CompositeServiceException {

        if(args.length != 3) {
            System.err.println("USAGE: GeneratedSDO <ors> <user> <pass>");
            return;
        }

        new GeneratedSDO(args[0], args[1], args[2]).execute();

    }

    private String orsId;
    private String user;
    private String pass;
    private HelperContext helperContext;
    private PrintStream out = System.out;

    public GeneratedSDO(String orsId, String user, String pass) {
        this.orsId = orsId;
        this.user = user;
        this.pass = pass;
    }
}

```

```

public void execute() throws CompositeServiceException {

    String systemName = "Admin";

    Properties config = new Properties();
    config.put(SiperianClient.SIPERIANCLIENT_PROTOCOL,
EjbSiperianClient.PROTOCOL_NAME);
    CompositeServiceClient client =
CompositeServiceClient.newCompositeServiceClient(config);

    CallContext callContext = new CallContext(orsId, user, pass);

    helperContext = client.getHelperContext(callContext);

    DataFactory dataFactory = helperContext.getDataFactory();

    // 1. Create new person
    WritePerson createPerson = (WritePerson)dataFactory.create(WritePerson.class);
    WritePersonParameters createPersonParameters =
(WritePersonParameters)dataFactory.create(WritePersonParameters.class);
    createPersonParameters.setSystemName(systemName);
    createPerson.setParameters(createPersonParameters);

    Person person = (Person)dataFactory.create(Person.class);
    createPerson.setObject(person);

    person.getChangeSummary().beginLogging();

    PersonRoot personRoot = (PersonRoot)dataFactory.create(PersonRoot.class);
    personRoot.setFirstName("John");
    personRoot.setLastName("Smith");
    person.setPerson(personRoot);

    person.getChangeSummary().endLogging();

    dump("*** CREATE NEW PERSON ...", createPerson);

    WritePersonReturn createPersonResponse =
(WritePersonReturn)client.process(callContext, (DataObject)createPerson);

    dump("*** PERSON CREATED:", createPersonResponse);

    String personRowId =
createPersonResponse.getObject().getPerson().getRowidObject();

    Key key = (Key)dataFactory.create(Key.class);
    key.setRowid(personRowId);
    CoFilterNode coFilterNode = (CoFilterNode)dataFactory.create(CoFilterNode.class);
    coFilterNode.setName(Person.class.getSimpleName());
    coFilterNode.setKey(key);
    CoFilter coFilter = (CoFilter)dataFactory.create(CoFilter.class);
    coFilter.setObject(coFilterNode);
    ReadPersonParameters readPersonParameters =
(ReadPersonParameters)dataFactory.create(ReadPersonParameters.class);
    readPersonParameters.setCoFilter(coFilter);

    ReadPerson readPerson = (ReadPerson)dataFactory.create(ReadPerson.class);
    readPerson.setParameters(readPersonParameters);

    dump("*** READ CREATED PERSON...", readPerson);

    ReadPersonReturn readPersonResponse =
(ReadPersonReturn)client.process(callContext, (DataObject)readPerson);

    dump("*** READ RESULT:", readPersonResponse);

    person = readPersonResponse.getObject();
    ((DataObject)person).detach();

    person.getChangeSummary().beginLogging();

```

```

        personRoot = person.getPerson();
        // add new 'one' child
        LUGenderLookup genderCd =
(LUGenderLookup) dataFactory.create(LUGenderLookup.class);
        genderCd.setGenderCode("M");
        personRoot.setGenderCd(genderCd);

        // add two 'many' children
        PersonTelephoneNumbersPager phonePager =
(PersonTelephoneNumbersPager) dataFactory.create(PersonTelephoneNumbersPager.class);

        PersonTelephoneNumbers phone1 =
(PersonTelephoneNumbers) dataFactory.create(PersonTelephoneNumbers.class);
        phone1.setPhoneNumber("111-11-11");
        PersonTelephoneNumbers phone2 =
(PersonTelephoneNumbers) dataFactory.create(PersonTelephoneNumbers.class);
        phone2.setPhoneNumber("222-22-22");

        phonePager.setItem(Arrays.asList(phone1, phone2));
        personRoot.setTelephoneNumbers(phonePager);

        person.getChangeSummary().endLogging();

        WritePerson updatePerson = (WritePerson) dataFactory.create(WritePerson.class);
        updatePerson.setObject(person);
        WritePersonParameters updatePersonParameters =
(WritePersonParameters) dataFactory.create(WritePersonParameters.class);
        updatePersonParameters.setSystemName(systemName);
        updatePersonParameters.setInteractionId("");
        updatePerson.setParameters(updatePersonParameters);

        dump("*** UPDATE PERSON...", updatePerson);

        WritePersonReturn updatePersonResponse =
(WritePersonReturn) client.process(callContext, (DataObject) updatePerson);

        dump("*** PERSON UPDATED:", updatePersonResponse);

        coFilterNode.setDepth(3);

        readPersonParameters.setReadSystemFields(true);

        dump("*** READ UPDATED PERSON WITH CHILDREN (with system fields)...",
readPerson);

        readPersonResponse = (ReadPersonReturn) client.process(callContext,
(DataObject) readPerson);

        dump("*** READ RESULT:", readPersonResponse);

        person = readPersonResponse.getObject();
        ((DataObject) person).detach();

        person.getChangeSummary().beginLogging();

        // delete one phone
        person.getPerson().getTelephoneNumbers().getItem().remove(0);

        // change gender
        genderCd = (LUGenderLookup) dataFactory.create(LUGenderLookup.class);
        genderCd.setGenderCode("F");
        personRoot.setGenderCd(genderCd);

        person.getChangeSummary().endLogging();

        WritePerson deletePhone = (WritePerson) dataFactory.create(WritePerson.class);
        deletePhone.setObject(person);
        WritePersonParameters deletePhoneParameters =
(WritePersonParameters) dataFactory.create(WritePersonParameters.class);
        deletePhoneParameters.setSystemName(systemName);
        deletePhone.setParameters(deletePhoneParameters);

```

```

        dump("*** DELETE CHILD...", deletePhone);

        WritePersonReturn deletePhoneResponse =
(WritePersonReturn)client.process(callContext, (DataObject)deletePhone);

        dump("*** CHILD DELETED:", deletePhoneResponse);

        readPersonParameters.setReadSystemFields(false);

        dump("*** READ PERSON AFTER CHILD WAS DELETED...", readPerson);

        readPersonResponse = (ReadPersonReturn)client.process(callContext,
(DataObject)readPerson);

        dump("*** READ RESULT:", readPersonResponse);

        person = readPersonResponse.getObject();
        ((DataObject)person).detach();

        person.getChangeSummary().beginLogging();

        ((DataObject)person.getPerson()).delete();

        person.getChangeSummary().endLogging();

        WritePerson deletePerson = (WritePerson)dataFactory.create(WritePerson.class);
        deletePerson.setObject(person);
        WritePersonParameters deletePersonParameters =
(WritePersonParameters)dataFactory.create(WritePersonParameters.class);
        deletePersonParameters.setSystemName(systemName);
        deletePerson.setParameters(deletePersonParameters);

        dump("*** DELETE PERSON...", deletePerson);

        WritePersonReturn deletePersonResponse =
(WritePersonReturn)client.process(callContext, (DataObject)deletePerson);

        dump("*** PERSON DELETED:", deletePersonResponse);

        dump("*** TRY TO READ PERSON AFTER DELETE", readPerson);

        try {
            readPersonResponse = (ReadPersonReturn)client.process(callContext,
(DataObject)readPerson);

            dump("*** READ RESULT:", readPersonResponse);
        } catch (CompositeServiceException e) {
            out.println("*** READ RESULT: " + e.getLocalizedMessage());
        }
    }

    private void dump(String title, Object object) {
        DataObject dataObject = (DataObject)object;
        String xml = helperContext.getXMLHelper().save(
            dataObject,
            dataObject.getType().getURI(),
            dataObject.getType().getName());
        out.println(title);
        out.println(xml);
        out.println();
    }
}

```

## CHAPTER 3

# REST Business Entity Service Calls

This chapter includes the following topics:

- [REST APIs for Business Entity Services Overview, 24](#)
- [Supported REST Methods, 25](#)
- [Authentication Method, 25](#)
- [Authentication Cookies for Login from Third-Party Applications, 25](#)
- [Swagger, 26](#)
- [REST Uniform Resource Locator, 26](#)
- [Header and Body Configuration, 27](#)
- [Standard Query Parameters, 30](#)
- [Formats for Dates and Time in UTC, 30](#)
- [Configuring WebLogic to Run Business Entity Service REST Calls, 31](#)
- [Viewing Input and Output Parameters, 32](#)
- [JavaScript Template, 32](#)
- [JavaScript Example, 33](#)
- [REST API Reference for Business Entity Services , 35](#)

## REST APIs for Business Entity Services Overview

Representational State Transfer (REST) endpoint calls make all business entity services available as web services.

You can make REST calls to create, update, delete, and search for base object records and related child records in a business entity. You can perform operations, such as merge, unmerge, and match records. You can make REST calls to create, update, and search for tasks and perform tasks. You can also make REST calls to create, update, and delete files, such as attachments for tasks or records.

A REST business entity service call is a web service request in the form of a Uniform Resource Locator (URL). The MDM Hub assigns a unique URL for each base object in a business entity. You can use the unique URL to identify which base object to update or delete.

**Note:** Before you use the REST APIs to call the business entity services, validate the Operational Reference Store.



# Supported REST Methods

The REST APIs for business entity services use the standard HTTP methods to perform operations on the resources, such as records, tasks, and files.

The REST APIs for business entity services support the following HTTP request methods:

Method	Description
GET	Retrieves information about a record, a task, or a file.
POST	Creates a task, a root record, a child record, or a file. <b>Note:</b> The Operational Reference Store (ORS) name in a POST request is case sensitive. If the case of the ORS name does not match the name in the MDM Hub, an error occurs.
PUT	Updates a root record, a child record, a task, or a file.
PATCH	Updates a task partially.
DELETE	Deletes a root record, a child record, or a file.

# Authentication Method

The REST endpoints for business entity services use the basic HTTP authentication method to authenticate users. When you first connect to a business entity service with your browser, you must provide your MDM Hub user name and password. After successful authentication, you can use the business entity services REST APIs to perform operations.

The browser caches the user credentials and uses them with every subsequent request to a business entity service.

# Authentication Cookies for Login from Third-Party Applications

Use authentication cookies to authenticate the MDM Hub users and call the business entity services from third party applications. You can obtain a cookie based on the credentials of an authenticated user. Save the cookie and use it to call the REST APIs. You need not hard-code the user name and password.

Make the following POST request to log in to the Entity 360 View with your user name and password:

```
POST http://<host>:<port>/e360/com.informatica.tools.mdm.web.auth/login
{
  user: 'admin',
  password: 'user password'
}
```

When the login operation is successful, the server returns the authentication cookie in the `set-cookie` header field. The following sample code shows a `set-cookie` in the response header:

```
Set-Cookie: auth_hash_cookie="admin===QTc1RkNGQkNCMzc1RjIyOQ==";
Version=1; Path=
```

Store the hash and use it in the request header of your API calls. You need not provide a user name and a password for the API calls.

The following example shows how to use an authentication cookie in your API request header:

```
GET http://<IP of host>:8080/cmx/cs/localhost-orcl-DS_UI1/Person?action=meta
Cookie: auth_hash_cookie="admin===QTc1RkNGQkNCMzc1RjIyOQ=="
```


## Swagger

The MDM Hub uses Swagger to list all the REST web services with URLs and parameters.

You can access Swagger with the following URL:

```
http://<host>:<port>/cmx/swagger-ui.html
```

The following image displays the user interface of Swagger:

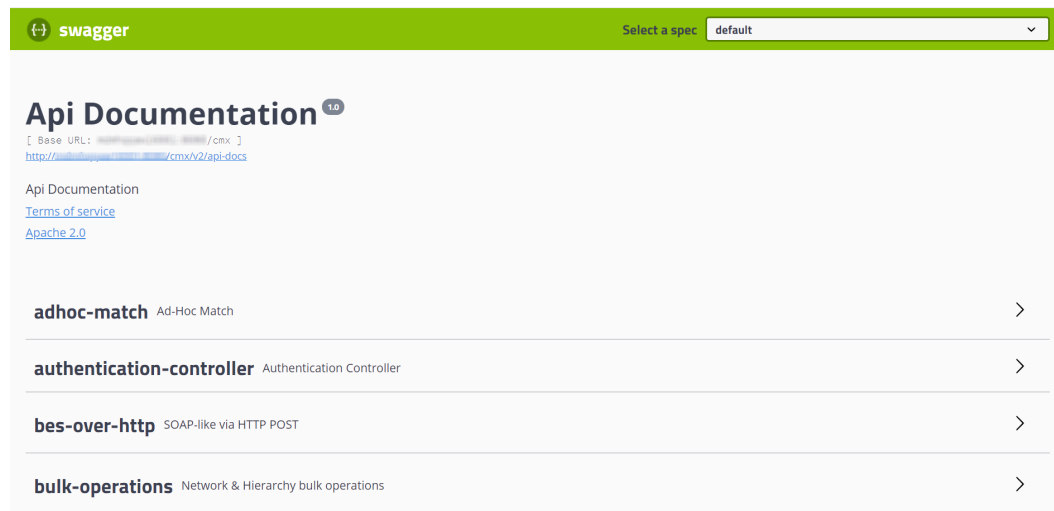

## REST Uniform Resource Locator

You use a REST URL to make REST calls for business entity services.

The REST URL has the following syntax:

```
http://<host>:<port>/<context>/<database ID>/<path>
```

The URL has the following fields:

### host

The host that is running the database.

### port

Port number that the database listener uses.

### context

The context for the business entity, search, query, match, task, and hierarchy APIs is `cmx/cs`.

The context for the match columns API is `cmx`.

The context for file APIs is `cmx/file`.

The context for task APIs is `cmx/task`.

The context for bulk task administration APIs is `cmx/task/operations`.

The context for bulk relationship APIs is `cmx/bulk`.

The context for chart report APIs is `cmx/report`.

**Note:** In a Hosted MDM environment, include the tenant name in the context. For example, the context can be `<tenant name>/cmx/cs` or `<tenant name>/cmx/file`.

#### database ID

ID of the ORS as registered in the Databases tool in the Hub Console.

#### path

The object that you want to use the API on, such as records, tasks, or files.

If the URL is for a root record, the path is the root object name followed by a unique identifier.

An example of a path for a Person root record is `Person/798243.json`.

If the URL is for a record that is a direct child of the root object, the path also includes the child record name and a unique identifier.

An example of a path for a billing address record that is a child of a Person root record is:

`Person/798243/BillAddresses/121522.json`.

If the URL is for a child record that is at a depth of two or greater, the path also includes the depth.

The following URL is an example of a REST URL for a child record with a depth of 2:

`http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/798243/BillAddresses/121522.json?depth=2`

**Note:** Parameters are case sensitive. Ensure the case of the parameter names in the REST URL matches the case of the parameter names in the REST configuration.

## Header and Body Configuration

A REST operation combines an HTTP method with the full URL to the resource. For a complete request, combine the REST operation with the appropriate HTTP headers and any required data. A REST request has a header and a body component. You can use the JSON or the XML format to define a request.

## Request Header

Use a request header to define the operating parameters or the metadata of the REST operation. The header consists of a series of field-value pairs. The API request line contains the method and the URL. Specify the header fields after the request line.

To construct the REST API request header, add the header fields after the `<METHOD> <<host>:<port>/<context>/<database ID>/<Path>` request line, as shown in the following example:

```
<METHOD> <<host>:<port>/<context>/<database ID>/<Path>
Content-Type: application/<json/xml>
Accept: application/<json/xml>
```

The following table describes some of the commonly used request header fields:

Request component	Description
Content-Type	Media type of the data in the request. When you include a body in the REST request, you must specify the media type of the body in the Content-Type header field. Include the Content-Type header field in PUT and POST requests.
Accept	Media type of the data in the response. To specify the request format, use <code>application/&lt;json/xml&gt;</code> in the header or add <code>.json</code> or <code>.xml</code> to the URL. Default is XML.

## Request Body

Use the REST API request body to send data in the request. A request body is used with a method that can have a body attached to it, such as the POST and the PUT methods. The body of data is written after the header lines. If the request message has a body, use the Content-Type header field to specify the format of the body in the request header.

The XML Schema Definition (XSD) files describe what elements and attributes you can use. The content of the request body depends on the element types that you define in the XSD files.

The XSD files are in the following location:

```
http://<host>:<port>/cmx/csfiles
```

## XML Format

When you use the XML request format, define the request object as an enclosing set of tags.

Use the following XML format to define a request object:

```
<request object>
  <attribute1>value1</attribute1>
  <attribute2>value2</attribute2>
</request object>
```

The following example shows the XML representation of a request object:

```
<task>
  <taskType>
    <name>UpdateWithApprovalWorkflow</name>
  </taskType>
  <taskId>urn:b4p2:5149</taskId>
  <owner>manager</owner>
  <title>Smoke test task 222</title>
  <comments>Smoke testing</comments>
  <dueDate>2015-06-15T00:00:00</dueDate>
  <status>OPEN</status>
```

```

    <priority>NORMAL</priority>
    <creator>admin</creator>
    <createDate>2015-06-15T00:00:00</createDate>
    <updatedBy>admin</updatedBy>
    <lastUpdateDate>2015-06-15T00:00:00</lastUpdateDate>
    <businessEntity>Person</businessEntity>
    <orsId>localhost-orcl-DS_UI1</orsId>
    <processId>IDDUUpdateWithApprovalTask</processId>
    <taskRecord>
      <businessEntity>
        <name>Person</name>
        <key>
          <rowid>123</rowid>
          <systemName></systemName>
          <sourceKey></sourceKey>
        </key>
      </businessEntity>
    </taskRecord>
  </task>

```

## JSON Format

When you use the JSON request format, define the request object with the type attribute.

Use the following JSON format to specify a request object:

```

{
  "type"="<request object>"
  "<attribute1>": "<value1>",
  "<attribute2>": "<value2>",
}

```

The following example shows the JSON representation of a request object:

```

{
  "type"="task"
  taskType: {name:"UpdateWithApprovalWorkflow"},
  taskId: "urn:b4p2:5149",
  owner: "manager",
  title: "Smoke test task 222",
  comments: "Smoke testing",
  dueDate: "2015-06-15T00:00:00",
  status: "OPEN",
  priority: "NORMAL",
  creator: "admin",
  createDate: "2015-06-15T00:00:00",
  updatedBy: "admin",
  lastUpdateDate: "2015-06-15T00:00:00",
  businessEntity: "Person",
  orsId: "localhost-orcl-DS_UI1",
  processId: 'IDDUUpdateWithApprovalTask',
  taskRecord: [{
    businessEntity:{
      name: 'Person',
      key:{
        rowid: '123',
        systemName: '',
        sourceKey: ''
      }
    }
  ]
}

```

# Standard Query Parameters

The business entity services REST APIs use standard query parameters to filter, paginate, and expand the results.

Use a question mark (?) to separate the query parameters from the other parameters. Query parameters are key-value pairs separated by the equal sign. Use an ampersand (&) to separate a sequence of query parameters.

The following REST request URL shows how to use query parameters:

```
/Person/123/Phone/SFA:456/PhoneUse?recordsToReturn=100&recordStates=ACTIVE,PENDING
```

Use the following standard query parameters:

Parameter	Description
recordsToReturn	Specifies the number of rows to return. Default is 10.
firstRecord	Specifies the first row in the result. Default is 1. Used in subsequent calls to read more pages.
searchToken	Specifies the search token returned with previous request. You can use the search token to fetch subsequent pages of search results. For example, the following query lists the first page: <code>/Person/123/Phone</code> The following query returns the second page: <code>/Person/123/Phone?searchToken=SVR1.AZAM5&amp;firstRecord=10</code>
returnTotal	If set to true, returns the number of records in the result. Default is false.
depth	Specifies the number of child levels to include in the result.

# Formats for Dates and Time in UTC

In the request and response, all dates and times are specified in UTC (Coordinated Universal Time), with or without an offset for a specific time zone.

When you specify a date and time in a request body, use one of the formats defined in [Date and Time Formats \(NOTE-datetime\)](#) for ISO specification 8601.

The following guidelines are taken from the NOTE-datetime document:

Type	Syntax	Example
Date: Year	YYYY	1997
Date: Year and month	YYYY-MM	1997-07
Date: Year, month, and day	YYYY-MM-DD	1997-07-16
Date plus hours and minutes	YYYY-MM-DDThh:mmTZD	1997-07-16T19:20+01:00

Type	Syntax	Example
Date plus hours, minutes, and seconds	YYYY-MM-DDThh:mm:ssTZD	1997-07-16T19:20:30+01:00
Date plus hours, minutes, seconds, and fractional seconds	YYYY-MM-DDThh:mm:ss.sTZD	1997-07-16T19:20:30.45+01:00

where:

- YYYY = a four-digit year
- MM = a two-digit month, from 01 to 12
- DD = a two-digit day of the month, from 01 to 31
- T = a literal value that follows the date and introduces the time
- hh = two digits for the hour, from 00 to 23
- mm = two digits for the minutes, from 00 to 59
- ss = two digits for the seconds, from 00 to 59
- s = one or more digits representing a decimal fraction of a second
- TZD = time zone designator (Z or +hh:mm or -hh:mm)
  - Z for UTC time
  - +hh:mm for a local time zone that is ahead of UTC
  - -hh:mm for a local time zone that is behind UTC

## Configuring WebLogic to Run Business Entity Service REST Calls

Because business entity services REST calls use basic HTTP authentication, you must disable the WebLogic Server authentication for the REST calls. To configure WebLogic to run business entity service REST calls, edit the WebLogic `config.xml` file.

1. Navigate to the following WebLogic directory:

On UNIX.

```
<WebLogic installation directory>/user_projects/domains/base_domain/config
```

On Windows.

```
<WebLogic installation directory>\user_projects\domains\base_domain\config
```

2. Open the following file in a text editor:

```
config.xml
```

3. Before the closing `</security-configuration>` tag, add the following XML code:

```
<enforce-valid-basic-auth-credentials>
  false
</enforce-valid-basic-auth-credentials>
```

# Viewing Input and Output Parameters

You can use Swagger to view the input and output parameters of the REST APIs.

The following image shows the input parameters in Swagger for the `adhoc-match` REST API:

The screenshot shows the Swagger UI for the `GET /adhocmatch/{orsId}/result/{jobGroupControlId}{?withMatches,withoutMatches}` endpoint. The parameters section is expanded, showing a table of input parameters:

Name	Description
<code>jobGroupControlId</code> string (path)	Batch Job Group ID <input type="text" value="jobGroupControlId - Batch Job Group ID"/>
<code>orsId</code> string (path)	ORS ID <input type="text" value="orsId - ORS ID"/>
<code>withMatches</code> boolean (query)	Return file records that matched to existing data <input type="text" value="true"/>
<code>withoutMatches</code> boolean (query)	Return file records that don't have matches in existing data <input type="text" value="false"/>

## JavaScript Template

The following code sample shows a basic template that you can modify to create JavaScript code for REST business entity service calls. You need the jQuery javascript library.

```
(function ($) {
    window.CSClient = window.CSClient || {
        baseUrl: "/cmx/cs/" + "[siperian-client.orsId]",
        user: "[siperian-client.username]",
        pass: "[siperian-client.password]",

        process: function (method, url, body, params) {
            var fullUrl = this.baseUrl + url + ".json?" + $.param(params);
            return $.ajax({
                method: method,
                contentType: "application/json",
                url: fullUrl,
                data: JSON.stringify(body),
                beforeSend: function (xhr) {
                    xhr.setRequestHeader("Authorization", "Basic " + btoa(CSClient.user
+ ":" + CSClient.pass));
                }
            });
        },

        readCo: function (url, params) {
            return this.process("GET", url, null, params);
        },
        createCo: function (url, body, params) {
            return this.process("POST", url, body, params);
        },
        updateCo: function (url, body, params) {
            return this.process("PUT", url, body, params);
        },
        deleteCo: function (url, params) {
            return this.process("DELETE", url, null, params);
        }
    }
})
```



```

    });
  })(jQuery);

```

## JavaScript Example

The resource kit has sample Java source code that shows how to make REST business entity service calls.

The sample code is in the following file:

```

<MDM Hub installation directory>\hub\resourcekit\samples\COS\source\resources\webapp\rest-
api.html

```

The following code shows REST API calls to create a person root record, add multiple child records, delete one child record, and then delete the person record and all child records:

```

<html>
<head>
  <script type="text/javascript" src="jquery-1.11.1.js"></script>
  <script type="text/javascript" src="cs-client.js"></script>
</head>
<body>

<script type="text/javascript" language="javascript">
  $(document).ready(function () {

    $("#run").click(function () {

      log = function(msg, json) {
        $('#log').before("<hr/><b>" + msg + "</b>");
        $('#log').before("<pre>" + JSON.stringify(json, undefined, 2) + "</
pre>");
      };

      CSCClient.createCo(
        "/Person",
        {
          firstName: "John",
          lastName: "Smith"
        },
        {
          systemName: "Admin"
        }
      ).then(
        function (result) {
          log("PERSON CREATED:", result);
          return CSCClient.readCo(
            "/Person/" + result.Person.rowidObject.trim(),
            {
              depth: 1
            }
          );
        }
      ).then(
        function (result) {
          log("READ CREATED PERSON:", result);
          return CSCClient.updateCo(
            "/Person/" + result.rowidObject.trim(),
            {
              genderCd: {
                genderCode: "M"
              },
              TelephoneNumbers: {
                item: [
                  {
                    phoneNumber: "111-11-11"

```

```

        },
        {
            phoneNumber: "222-22-22"
        }
    ]
    },
    {
        systemName: "Admin"
    }
    );
}
).then(
function (result) {
    log("PERSON UPDATED:", result);
    return CSClient.readCo(
        "/Person/" + result.Person.rowidObject.trim(),
        {
            depth: 3,
            readSystemFields: true
        }
    );
}
).then(
function (result) {
    log("READ UPDATED PERSON:", result);
    return CSClient.deleteCo(
        "/Person/" + result.rowidObject.trim() + "/" +
        TelephoneNumbers/" + result.TelephoneNumbers.item[0].rowidObject.trim(),
        {
            systemName: "Admin"
        }
    );
}
).then(
function (result) {
    log("TELEPHONE DELETED:", result);
    return CSClient.readCo(
        "/Person/" + result.Person.rowidObject.trim(),
        {
            depth: 3
        }
    );
}
).then(
function (result) {
    log("READ PERSON AFTER TELEPHONE IS DELETED:", result);
    return CSClient.deleteCo(
        "/Person/" + result.rowidObject.trim(),
        {
            systemName: "Admin"
        }
    );
}
).then(
function (result) {
    log("PERSON DELETED:", result);
    return CSClient.readCo(
        "/Person/" + result.Person.rowidObject.trim(),
        {
            depth: 1,
            recordStates: "ACTIVE,PENDING,DELETED",
            readSystemFields: true
        }
    );
}
).then(
function (result) {
    log("READ PERSON AFTER DELETE (HSI -1):", result);
}
);

```

```
    });  
  });  
</script>  
  
<input type="button" id="run" value="Run..." />  
<p/>  
<div id="log"></div>  
</body>  
</html>
```

## REST API Reference for Business Entity Services

The REST API reference for business entity services lists the REST APIs and provides a description for each API. The API reference also contains information on the URLs, the query parameters, the sample requests, and the sample responses.

### Get Metadata

The Get Metadata REST API returns the data structure of a business entity or a business entity relationship.

The API uses the GET method to return the following metadata of a business entity:

- Structure of the business entity
- List of fields
- Field types such as the data type and size
- Security settings for operations, such as create, update, and merge
- Localized labels for nodes or fields
- Name of the code and display fields for lookup fields
- Default values for fields and lookup fields

**Note:** Multiple default values are not supported with dependent lookup fields.

The API returns the following details of a business entity relationship:

- Name of the relationship and its label.
- From and To business entities.
- Direction of the relationship.

### Request URL

The Get Metadata URL has the following format for a business entity:

```
http://<host>:<port>/<context>/<database ID>/<business entity>?action=meta
```

The Get Metadata URL has the following format for a relationship:

```
http://<host>:<port>/<context>/<database ID>/<relationship>?action=meta
```

Use the query parameter "action=meta" to retrieve the metadata information. Ensure that you specify the name of the business entity correctly.

Make an HTTP GET request to the Get Metadata URL:

```
GET http://<host>:<port>/<context>/<database ID>/<business entity/relationship>?
action=meta
```

You can add HTTP headers to the request.

## Sample API Request

The following sample request retrieves metadata information for the Person business entity and root node:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person?action=meta
```

The following sample request includes a header to retrieve the metadata information for the Person business entity in the JSON format:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person?action=meta
Accept: application/json
```

The following sample request retrieves metadata information for the HouseholdContainsMemberPerson relationship:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/
ProductGroupProductGroupIsParentOfProductGroupProductGroup?action=meta
```

## Sample API Response

The sample responses for an entity and a relationship contain security permissions. The first `operations` section defines the possible permissions. The `object` section lists your permissions for the entire business entity or relationship. The `fields` section defines your permissions at the field level.

The following example shows a partial data structure for the Person business entity in the JSON format.

```
{
  "operations": {
    "read": {
      "allowed": true
    },
    "search": {
      "allowed": true
    },
    "create": {
      "allowed": true,
      "task": {
        "template": {
          "title": "Review changes in {taskRecord[0].label}",
          "priority": "NORMAL",
          "dueDate": "2018-04-24T09:28:13.455-04:00",
          "taskType": "AVOSBeUpdate",
          "comment": "This is urgent. Please review ASAP"
        },
        "comment": "AS_REQUIRED",
        "attachment": "OPTIONAL"
      }
    },
    "update": {
      "allowed": true,
      "task": {
        "template": {
          "title": "Review changes in {taskRecord[0].label}",
          "priority": "NORMAL",
          "dueDate": "2018-04-24T09:28:13.455-04:00",
          "taskType": "AVOSBeUpdate",
          "comment": "This is urgent. Please review ASAP"
        },
        "comment": "AS_REQUIRED",
        "attachment": "OPTIONAL"
      }
    }
  }
},
```

```

"merge": {
  "allowed": true,
  "task": {
    "template": {
      "title": "Review changes in {taskRecord[0].label}",
      "priority": "NORMAL",
      "dueDate": "2018-04-24T09:28:13.455-04:00",
      "taskType": "AVOSBeMerge",
      "comment": "This is urgent. Please review ASAP"
    },
    "comment": "AS REQUIRED",
    "attachment": "OPTIONAL"
  }
},
"delete": {
  "allowed": true
},
"unmerge": {
  "allowed": true,
  "task": {
    "template": {
      "title": "Review changes in {taskRecord[0].label}",
      "priority": "NORMAL",
      "dueDate": "2018-04-24T09:28:13.455-04:00",
      "taskType": "AVOSBeUnmerge",
      "comment": "This is urgent. Please review ASAP"
    },
    "comment": "AS REQUIRED",
    "attachment": "OPTIONAL"
  }
},
"objectType": "ENTITY",
"timeline": true,
"object": {
  "operations": {
    "read": {
      "allowed": true
    },
    "create": {
      "allowed": true
    },
    "update": {
      "allowed": true
    },
    "merge": {
      "allowed": true
    },
    "delete": {
      "allowed": true
    },
    "unmerge": {
      "allowed": true
    }
  }
},
"field": [
  {
    "operations": {
      "read": {
        "allowed": true
      },
      "create": {
        "allowed": true
      },
      "update": {
        "allowed": true
      }
    },
    "allowedValues": [
      "Person"
    ]
  }
],

```

```

        "searchable": {
            "filterable": true,
            "facet": true
        },
        "name": "partyType",
        "label": "Party Type",
        "dataType": "String",
        "length": 255
    },
    {
        "operations": {
            "read": {
                "allowed": true
            },
            "create": {
                "allowed": true
            },
            "update": {
                "allowed": true
            }
        },
        "name": "lastName",
        "label": "Last Name",
        "dataType": "String",
        "length": 50
    },
    {
        "operations": {
            "read": {
                "allowed": true
            },
            "create": {
                "allowed": true
            },
            "update": {
                "allowed": true
            }
        },
        "searchable": {
            "filterable": true,
            "facet": true
        },
        "name": "displayName",
        "label": "Display Name",
        "dataType": "String",
        "length": 200
    },
    ...
],
"name": "Person",
"label": "Person",
"many": false
}
}

```

## List Metadata

The List Metadata REST API returns a list of business entities or relationships that you have defined. The response includes timeline information and security information, if the business entities contain that information. You can use the API to retrieve the list of relationships that start from an entity, end at an entity, or start from and end at specified entities.

The API uses the GET method.

## List Metadata URL

The List Metadata URL has the following format for entity metadata:

```
http://<host>:<port>/<context>/<database ID>/meta/entity
```

The List Metadata URL has the following format for relationship metadata:

```
http://<host>:<port>/<context>/<database ID>/meta/relationship
```

Make the following HTTP GET request to the List Metadata URL:

```
GET http://<host>:<port>/<context>/<database ID>/meta/entity|relationship
```

## Query Parameters

You can append the query parameters to the request URL to filter the search results for the business entity relationships. You can specify the direction and search for relationships to and from a business entity.

The following table lists the query parameters:

Parameter	Description
start	Optional. Specifies the entity from which a relationship originates. For example, the <code>meta/relationship?start=Organization</code> query returns all relationships that start from the <code>Organization</code> business entity.
finish	Optional. Specifies the entity at which a relationship ends. For example, the <code>meta/relationship?finish=Person</code> query returns all relationships that end at the <code>Person</code> business entity.

You can specify both the parameters to retrieve all the relationships between two business entities. For example, the `meta/relationship?start=Organization&finish=Person` query returns all relationships that start from the `Organization` business entity and end at the `Person` business entity.

## Sample API Request

The following sample request retrieves the list of business entities configured:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/meta/entity
```

The following sample request retrieves the list of relationships configured:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/meta/relationship
```

The following sample request retrieves the list of relationships that start from the `Organization` business entity and end at the `Person` business entity:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/meta/relationship?start=Organization&finish=Person
```

## Sample API Response

The following example shows an excerpt of the list of configured relationships:

```
{
  "link": [],
  "firstRecord": 1,
  "pageSize": 10,
  "item": [
    {
      "operations": {
        "read": {
```

```

    "allowed": true
  },
  "search": {
    "allowed": false
  },
  "create": {
    "allowed": true,
    "task": {
      "template": {
        "title": "Review changes in {taskRecord[0].label}",
        "priority": "NORMAL",
        "dueDate": "2018-04-24T09:31:48.167-04:00",
        "taskType": "AVOSBeUpdate",
        "comment": "This is urgent. Please review ASAP"
      },
      "comment": "AS_REQUIRED",
      "attachment": "OPTIONAL"
    }
  },
  "update": {
    "allowed": true,
    "task": {
      "template": {
        "title": "Review changes in {taskRecord[0].label}",
        "priority": "NORMAL",
        "dueDate": "2018-04-24T09:31:48.167-04:00",
        "taskType": "AVOSBeUpdate",
        "comment": "This is urgent. Please review ASAP"
      },
      "comment": "AS_REQUIRED",
      "attachment": "OPTIONAL"
    }
  },
  "merge": {
    "allowed": true,
    "task": {
      "template": {
        "title": "Review changes in {taskRecord[0].label}",
        "priority": "NORMAL",
        "dueDate": "2018-04-24T09:31:48.167-04:00",
        "taskType": "AVOSBeMerge",
        "comment": "This is urgent. Please review ASAP"
      },
      "comment": "AS_REQUIRED",
      "attachment": "OPTIONAL"
    }
  },
  "delete": {
    "allowed": true
  },
  "unmerge": {
    "allowed": true,
    "task": {
      "template": {
        "title": "Review changes in {taskRecord[0].label}",
        "priority": "NORMAL",
        "dueDate": "2018-04-24T09:31:48.167-04:00",
        "taskType": "AVOSBeUnmerge",
        "comment": "This is urgent. Please review ASAP"
      },
      "comment": "AS_REQUIRED",
      "attachment": "OPTIONAL"
    }
  },
  "objectType": "ENTITY",
  "timeline": false,
  "object": {
    "link": [
      {
        "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/

```



```

        CreditCard.json?action=meta",
        "rel": "entity"
    }
],
"field": [
    {
        "name": "issuingCompany",
        "label": "Issuing Company",
        "dataType": "String",
        "length": 100
    },
    {
        "name": "expirationYear",
        "label": "Expiration Year",
        "dataType": "String",
        "length": 4
    },
    {
        "allowedValues": [
            "Credit Card"
        ],
        "name": "accountType",
        "label": "Account Type",
        "dataType": "String",
        "length": 255
    },
    {
        "name": "accountNumber",
        "label": "Account Number",
        "dataType": "String",
        "length": 20
    },
    {
        "name": "securityCode",
        "label": "Security Code",
        "dataType": "String",
        "length": 4
    },
    {
        "name": "expirationMonth",
        "label": "Expiration Month",
        "dataType": "String",
        "length": 2
    },
    {
        "name": "cardholderName",
        "label": "Card Holder Name",
        "dataType": "String",
        "length": 100
    },
    {
        "name": "consolidationInd",
        "label": "Consolidation Ind",
        "dataType": "Integer",
        "length": 38,
        "readOnly": true,
        "system": true
    },
    {
        "name": "creator",
        "label": "Creator",
        "dataType": "String",
        "length": 50,
        "readOnly": true,
        "system": true
    },
    {
        "name": "interactionId",
        "label": "Interaction Id",
        "dataType": "Integer",
        "length": 38,

```

```

    "readOnly": true,
    "system": true
  },
  {
    "name": "updatedBy",
    "label": "Updated By",
    "dataType": "String",
    "length": 50,
    "readOnly": true,
    "system": true
  },
  {
    "name": "lastUpdateDate",
    "label": "Last Update Date",
    "dataType": "Date",
    "readOnly": true,
    "system": true
  },
  {
    "name": "lastRowidSystem",
    "label": "Last Rowid System",
    "dataType": "String",
    "length": 14,
    "readOnly": true,
    "system": true
  },
  {
    "name": "dirtyIndicator",
    "label": "Dirty Indicator",
    "dataType": "Integer",
    "length": 38,
    "readOnly": true,
    "system": true
  },
  {
    "name": "deletedBy",
    "label": "Deleted By",
    "dataType": "String",
    "length": 50,
    "readOnly": true,
    "system": true
  },
  {
    "name": "deletedInd",
    "label": "Deleted Indicator",
    "dataType": "Integer",
    "length": 38,
    "readOnly": true,
    "system": true
  },
  {
    "name": "hubStateInd",
    "label": "Hub State Ind",
    "dataType": "Integer",
    "length": 38,
    "readOnly": true,
    "system": true
  },
  {
    "name": "deletedDate",
    "label": "Deleted Date",
    "dataType": "Date",
    "readOnly": true,
    "system": true
  },
  {
    "name": "rowidObject",
    "label": "Rowid Object",
    "dataType": "String",
    "length": 14,
    "readOnly": true,

```

```

        "system": true
    },
    {
        "name": "cmDirtyInd",
        "label": "Content metadata dirty Ind",
        "dataType": "Integer",
        "length": 38,
        "readOnly": true,
        "system": true
    },
    {
        "name": "createDate",
        "label": "Create Date",
        "dataType": "Date",
        "readOnly": true,
        "system": true
    }
],
"name": "CreditCard",
"label": "Credit Card",
"many": false
}
},
...
]
}

```

## List Match Columns

The List Match Columns REST API can return either a list of match rule sets for a specified business entity or a list of match columns for a specified match rule set. You can generate a list of match columns and use the match columns with the SearchMatch REST API.

For information on configuring match columns and match rule sets, see the *Multidomain MDM Configuration Guide*.

The API uses the GET method.

### Request URL

The context for the List Match Columns URL is `cmx`. In a Hosted MDM environment, include the tenant name in the context, such as `<tenant name>/cmx`.

The List Match Columns URL has the following formats:

#### URL to return all the match rule sets

Use the following URL to list all the match rule sets for a specific business entity:

```
http://<host>:<port>/<context>/queryTemplate/<database ID>/<business entity>
```

Make the following HTTP GET request to the List Match Columns URL:

```
GET http://<host>:<port>/<context>/queryTemplate/<database ID>/<business entity>
```

#### URL to return the match columns used in a specified match rule set

Use the following URL to list all the match columns in a specified match rule set:

```
http://<host>:<port>/<context>/queryTemplate/<database ID>/<business entity>/<match rule set>
```

## Sample API Request

### Request for match rule sets

The following sample request lists the match rule sets for the Person business entity:

```
GET http://localhost:8080/cmz/queryTemplate/localhost-orcl-DS_UI1/Person
```

### Request for match columns

The following sample request lists the match columns that are used in the match rule set IDL2:

```
GET http://localhost:8080/cmz/queryTemplate/localhost-orcl-DS_UI1/Person/IDL2
```

## Sample API Response

The following sample response contains the match columns that are included in the IDL2 match rule set:

```
{
  "queryTemplates": [
    {
      "businessEntity": "Person",
      "matchRuleSet": "IDL2",
      "type": "extended",
      "searchFields": [
        {
          "name": "displayName",
          "mandatory": true
        },
        {
          "name": "BillAddresses.Address.addressLine1",
          "mandatory": false
        },
        {
          "name": "ShipAddresses.Address.addressLine2",
          "mandatory": false
        },
        {
          "name": "ShipAddresses.Address.addressLine1",
          "mandatory": false
        }
      ]
    }
  ]
}
```

## Read Record

The Read Record REST API returns the details of a root record in the business entity. You can use the API to return the details of the child records of a root record. You can use the API to view the content metadata of a record.

The API uses the GET method.

You can sort the result set to view the information in ascending or descending order. Use the POST method when you need more and complex parameters. For example, when you want to retrieve the data where the child elements are ordered by a set of fields.

### Request URL

Use the row ID or the name of the source system and the source key to specify the record in the request URL.

The Read Record URL can have the following formats:

### URL with rowId

Use the following URL format when you specify the row ID:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId of the root record>
```

Make the following HTTP GET request to the URL:

```
GET http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId of the root record>
```

### URL with source system name and source key

Use the following URL format when you specify the source system name and the source key:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<system name>:<source key>
```

### URL with system name and global business identifier (GBID) of an object

Use the following URL format when you specify the source system name and the GBID:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<system name>:uid:<gbid>
```

### URL with only the GBID

Use the following URL format when you specify only the GBID:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/:uid:<gbid>
```

### URL with more than one GBID

Use the following URL format when you specify more than one GBID:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/:one:<gbid>,another:<gbid>
```

### URL to return the details of the child nodes

Use the following URL format to return the details of the child nodes:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId of the record>?depth=n
```

### URL to return the details of a child nodes

Use the following URL format to return the details of child nodes:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId of the record>?children=<comma separated list of child node names or paths>
```

For example, children= BillAddresses/Address,Email

### URL to return the details of a particular node

Use the following URL format to return the details of particular node:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId of the record>/<node name>
```

### URL to return the details of the children of a particular node

Use the following URL format to return the details of the children of a particular node:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId of the record>/<node name>?children=<child node name>
```

### URL to return the content metadata of a record

Use the following URL format to return the content metadata of a record:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId of the root record>?contentMetadata=<content metadata type>
```

For example, you can retrieve matches for the child records with the following GET request:

```
GET http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId of the root record>?contentMetadata=MATCH
```

#### URL to sort the child elements by fields

Use the following URL format to sort the child elements by fields:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId of the root record>/<node name>?order=-<field name>
```

Use the character the character - as suffix to specify descending order.

## Query Parameters

You can append the query parameters to the request URL to filter the details of the record.

The following table lists the query parameters:

Parameter	Description
depth	Number of child levels to return. Specify 2 to return the root node and its direct children, and 3 to return the root node, direct children, and grandchildren. Default is 1.
effectiveDate	Date for which you want to retrieve the data.
readSystemFields	Indicates whether to return the system fields in the result. Default is false.
recordStates	State of the record. Provide a comma-separated list of states. The supported record states are ACTIVE, PENDING, and DELETED. Default is ACTIVE.
contentMetadata	Metadata of the record. Provide a comma-separated list. For example, XREF, PENDING_XREF, DELETED_XREF, HISTORY, XREF_HISTORY, and MATCH. When you select MATCH, the response contains a list of matched records that are retrieved from the _MTCH table.
historyDate	Date for which you want to retrieve history data. The response contains record data for the specified date retrieved from the _HIST table. You can use historyDate together with the contentMetadata parameter to retrieve historical metadata. Set contentMetadata to XREF, BVT, or TRUST. <ul style="list-style-type: none"><li>- XREF. The response contains historical cross-reference data from the _HXRF table.</li><li>- BVT. The response contains historical best version of the truth from the _HCTL table.</li><li>- TRUST. The response contains historical trust settings from the _HCTL and _HVXR tables.</li></ul>
children	Comma-separated list of child node names or paths.

Parameter	Description
suppressLinks	<p>Indicates whether the parent-child links are visible in the API response. Set the parameter to true to suppress all parent-child links in the response. Default is false.</p> <p>For example, the <code>Person/1242?depth=10&amp;suppressLinks=true</code> query will display the record details up to 10 child levels, with no parent-child links visible in the response.</p>
order	<p>Comma-separated list of field names with an optional prefix of + or -. The prefix + indicates to sort the results in ascending order, and the prefix - indicates to sort the results in descending order. Default is +. When you specify more than one parameter, the result set is ordered by the parameter that is first in the list, followed by the next.</p> <p>For example, the <code>Person/1242/Names?order=-name</code> query will display the result with the names in descending order.</p> <p>The <code>Person/1242/BillAddresses?order=rowidObject,-effStartDate</code> query will display the billing addresses with the rowid in ascending order and then, the effective start date in descending order.</p>

The following example shows how to filter the details of a record:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/123/Phone/SFA:456/PhoneUse?
recordsToReturn=100&recordStates=ACTIVE,PENDING&contentMetadata=XREF
```

## RELATED TOPICS:

- [“Formats for Dates and Time in UTC” on page 30](#)

## POST Request to Specify Sort Order of Child Elements

Use a POST request to order the result set by multiple fields. Include the parameters or fields in the POST body.

The following sample request shows how to use the POST request for a read operation and sort the data by multiple fields:

```
http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/ReadPerson.json
{
  parameters:
  {
    coFilter: {
      object: {
        name:"Person",
        key: {
          rowid: 1242
        },
      },
      order: "lastName",
      object:[
        {name:"Names", order:"-name"},
        {name:"Phone", order:"phoneNum, -phoneCountryCd",
          object:[{name:"PhonePermissions", order:"-column1"}]}
      ]
    }
  }
}
```

**Note:** At each level of business entity, for each type of children only one type of sort order is allowed.

## Sort Order Considerations

The Read Record API supports sorting order by one or more fields for each business entity child node. The following section describes certain considerations that you need to be aware of when you specify the sort order.

- If you specify the sort order for the grandchild and not for the child, the grandchild element is sorted as per the order specified. The child element is not sorted by the sort order specified for the grandchild. The following is a sample request:

```
http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/1242/Phone/861/  
PhonePermissions?order=-column1
```

In the sample request, while a descending sort order is specified for grandchild PhonePermissions, no order is specified for the child element Phone. Phone is not sorted by the PhonePermissions sort order.

- If you specify the sort order for the child and not for the grandchild, the child is sorted by the sort order specified. The grandchild is not sorted by the sort order specified for the child. The following is a sample request:

```
{parameters:  
  {coFilter: {  
    object: {  
      name:"Person", key: { rowid: 1242 }, order: "lastName",  
      object:[  
        {name:"Names", order:"-name"},  
        {name:"Phone", order:"-phoneCountryCd, -phoneNum", object:  
          [{name:"PhonePermissions"}]},  
        ]}  
      }  
    }  
  }  
}
```

In the sample request, the sort order is specified for child Phone and not for grandchild PhonePermissions. The child Phone is sorted by the order specified.

- If you specify the sort order for the child and the grandchild, both are sorted as per the sort order. The following sample request specifies the sort order for the Phone (child) and the PhonePermissions (grandchild):

```
{parameters:  
  {coFilter: {  
    object: {  
      name:"Person", key: { rowid: 1242 }, order: "lastName",  
      object:[  
        {name:"Names", order:"-name"},  
        {name:"Phone", order:"-phoneCountryCd, -phoneNum", object:  
          [{name:"PhonePermissions", order:"-column1"}]},  
        ]}  
      }  
    }  
  }  
}
```

- A child can be sorted only by the columns in the child itself, while the grandchild can be sorted by the columns in the grandchild. In the following sample requests, the Phone is sorted by PhoneType and the PhonePermissions is sorted by column 1. PhoneType is a column in Phone (child) and column 1 is a column in PhonePermissions (grandchild).

```
http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/1242/Phone?order=-PhoneType  
http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/1242/Phone/861/  
phonePermissions?order=column1
```

- At each level of business entity, for each type of children only one type of sort order is allowed. In the following request, you have specified different sort orders for the PhonePermissions children of different parents. However, because first the sort order is specified as descending, the PhonePermissions children of both parents (rowid 861 and rowid 862) are sorted in descending order.

```
{parameters:  
  {coFilter: {  
    object: {  
      name:"Person", key: { rowid: 1242 }, order: "lastName",  
      object:[
```



```

        {name:"Names", order:"-name"},
        {name:"Phone", key: { rowid:861 }, order:"+phoneCountryCd, -phoneNum", object:
    [{"name:"PhonePermissions", order:"-column1"}]},
        {name:"Phone", key: {rowid:862}, order:"phoneNum, -phoneCountryCd", object:
    [{"name:"PhonePermissions", order:"column1"}]}
    ]}
  }}}

```

## Sample API Requests

The following sample request returns the details of the root record in the Person business entity.

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/102
```

The following sample request returns the details of a child record with rowId 2. The child base object is genderCd and the child record is at a depth of 2.

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/102/genderCd/2?depth=2
```

The following sample request uses the system name and source key to returns the details of the root record:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/SFA:9000000000
```

The following sample request returns the details of the root record and its XREF records:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/102?contentMetadata=XREF
```

The following sample request returns the details of the root record, with the names in descending order:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/1242/Names?order=-name
```

The following sample request returns the billing addresses with the rowid in ascending order and then, the effective start date in descending order:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/1242/BillAddresses?
order=rowidObject,-effStartDate
```

## Sample API Response

The following example shows the details of the root record in the Person business entity.

```

{
  "link": [
    {
      "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/102",
      "rel": "self"
    },
    {
      "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/102?
depth=2",
      "rel": "children"
    },
    {
      "href": "http://localhost:8080/cmx/request/hm_icons/person_small.jpeg?
ors=localhost-orcl-DS_UI1",
      "rel": "icon"
    }
  ],
  "rowidObject": "102",
  "label": "DARWENT, JIMMY",
  "partyType": "Person",
  "statusCd": "A",
  "lastName": "DARWENT",
  "middleName": "N",
  "firstName": "JIMMY",
  "displayName": "JIMMY N DARWENT",
  "genderCd": {
    "link": [
      {

```

```

        "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/102",
        "rel": "parent"
    },
    {
        "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/102/
genderCd",
        "rel": "self"
    },
    {
        "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/102/
genderCd?depth=2",
        "rel": "children"
    }
],
"genderCode": "M"
},
"generationSuffixCd": {
    "link": [
        {
            "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/102",
            "rel": "parent"
        },
        {
            "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/102/
generationSuffixCd?depth=2",
            "rel": "children"
        },
        {
            "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/102/
generationSuffixCd",
            "rel": "self"
        }
    ],
    "generationSuffixCode": "I"
}
}
}

```

The following example shows the details of a child record in the genderCd base object.

```

{
    "link": [
        {
            "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/102",
            "rel": "parent"
        },
        {
            "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/102/
genderCd/2?depth=2",
            "rel": "children"
        },
        {
            "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/102/
genderCd/2",
            "rel": "self"
        }
    ],
    "rowidObject": "2",
    "label": "LU Gender",
    "genderDisp": "MALE",
    "genderCode": "M"
}

```

## Create Record

The Create Record REST API creates a record in the specified business entity. Send the record data in the request body. Use the Promote API to promote and add the record in the business entity.

The API uses the POST method to create a record.

## Request URL

The Create Record URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>?systemName=<name of the source system>
```

**Note:** The name of the source system is a required parameter in the URL.

Make the following HTTP POST request to the Create Record URL:

```
POST http://<host>:<port>/<context>/<database ID>/<business entity>?systemName=<name of the source system>
```

Add the Content-Type header to specify the media type of the data you want to send with the request:

```
POST http://<host>:<port>/<context>/<database ID>/<business entity>?systemName=<name of the source system>  
Content-Type: application/<json/xml>
```

## URL Parameters

The name of the source system is a required parameter in the request URL.

The following table lists the parameters that you can use in the URL:

Parameter	Description
systemName	Name of the source system.
interactionId	ID of the interaction. You can group multiple requests into a single interaction. All changes are done with the interaction ID.
ignoreWarnings	Indicates whether the warning-level validation messages are ignored. Default is false. Set to true to ignore the warning messages.
startDate and endDate	Specifies the period of time for which the record is effective. Provide these parameters for a timeline-enabled base object.
validateOnly	Indicates whether the write business entity service validates incoming data. Default is false.
recordState	State of the record. Use the parameter to specify the initial state of the record. Use ACTIVE or PENDING. Default is ACTIVE.
taskComment	Add a comment to the workflow task triggered by the API.
taskAttachments	If task attachments are enabled, attach a file to the workflow task triggered by the API.

## RELATED TOPICS:

- [“Formats for Dates and Time in UTC” on page 30](#)

## Request Body

Send data for the record in the REST request body. Use the JSON format or the XML format to send data. Use the Get Metadata API to get the structure of the business entity and provide the required parameter values in the request body.

## Response Header and Body

When the response is successful, the API returns the interactionId and the processId in the response header and the record details in the response body.

If the process generates an interaction ID and uses it to create the record, the API returns the interaction ID. If the process starts a workflow instead of directly saving the record to the database, the API returns the process ID which is the ID of the workflow process.

The following example shows a response header with an interaction ID and a process ID:

```
BES-interactionId: 72200000242000
BES-processId: 15948
```

The response body contains the record with the generated row IDs.

## Sample API Request

The following sample request creates a record in the Person business entity. The request adds a comment and attachment to the workflow task triggered by the API.

```
POST http://localhost:8080/cmxc/cs/localhost-orcl-DS_UI1/Person?
systemName=Admin&taskComment=Read my
comment&taskAttachments=TEMP_SVR1.29OT8,TEMP_SVR1.29OT9
Content-Type: application/json

{
  firstName: "John",
  lastName: "Smith",
  Phone: {
    item: [
      {
        phoneNumber: "111-11-11"
      }
    ]
  }
}
```

## Sample API Response

The following sample response shows the response header and body after successfully creating a record:

```
BES-interactionId: 72200000242000
BES-processId: 15948
Content-Type: application/json
{
  "Person": {
    "key": {
      "rowid": "2198246",
      "sourceKey": "72200000241000"
    },
    "rowidObject": "2198246",
    "Phone": {
      "item": [
        {
          "key": {
            "rowid": "260961",
            "sourceKey": "72200000243000"
          },
          "rowidObject": "260961"
        }
      ]
    }
  }
}
```

## Update Record

The Update Record REST API updates the specified root record and its child records. Send the ID of the record in the request URL. Send the summary of the changes in the body of the request.

After the change, if the record is in a pending state, use the Promote API to promote the changes. For example, if the update triggered a review workflow, the record is in a pending state until the review is complete.

The API uses the POST method.

For root records, you can choose to use the simplified PUT version, where the body of the request contains the changed field, not a change summary. To update root records and related child or grandchild records, use the POST version. You also have the option to use the PUT version with the PKEY or the specify the rowidObject of the child record.

### Request URL

The Update Record URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?systemName=<name of the source system>
```

**Note:** The name of the source system is a required parameter in the URL.

Make the following HTTP POST request to the Update Record URL:

```
POST http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?systemName=<name of the source system>
```

Add the Content-Type header to specify the media type of the data you want to send with the request:

```
PUT http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?systemName=<name of the source system>
Content-Type: application/<json/xml>
```

### Query Parameters

The name of the source system is a required query parameter.

You can use the following query parameters in the request:

Parameter	Description
systemName	Name of the source system.
interactionId	ID of the interaction. You can group multiple requests into a single interaction. All changes are done with the interaction ID.
ignoreWarnings	Indicates whether the warning-level validation messages are ignored. Default is false. Set to true to ignore the warning messages.
startdate and enddate	Specifies the period of time for which the record is effective. Provide these parameters for a timeline-enabled base object.
validateOnly	Indicates whether the incoming data is validated. Default is false.
recordState	Sets the state of the record. Use ACTIVE, PENDING, or DELETED. For example, if you set recordState=ACTIVE, and request runs on a soft-deleted record, the request restores the record to the active state.

Parameter	Description
taskComment	Add a comment to the workflow task triggered by the API.
taskAttachments	If task attachments are enabled, attach a file to the workflow task triggered by the API.

## RELATED TOPICS:

- [“Formats for Dates and Time in UTC” on page 30](#)

## Request Body

Send the data to update in the REST request body. Use the JSON format or the XML format to send the data.

Provide the new parameter values. Use the \$original parameter to indicate the old value of a parameter you want to update.

You can also use the following properties with child records:

Properties / Elements	Type	Description
MATCH	object	If you want to add or remove match candidates from the match table for the child record, add the MATCH object to the child record.
MERGE	object	If you want to merge child records or remove candidates from the merge, add the MERGE object to the child record.

The following JSON code sample changes the first name in the root record to Bob:

```
{
  rowidObject: "123",
  firstName: "Bob",
  lastName: "Smith",
  $original: {
    firstName: "John"
  }
}
```

The following JSON code sample removes a match candidate for an Address child record, and defines the merge for two Telephone child records:

```
{
  rowidObject: "123",
  firstName: "Bob",
  lastName: "Smith",
  $original: {
    firstName: "John"
  }
  Address: { // remove A3 from the matches for A2 in the Address_MTCH table
    item: [
      {
        rowidObject: "A2",
        MATCH: {
          item: [ // to remove matched child records for A2, specify null
            null
          ],
          $original: {
            item: [{key: {rowid: 'A3'}}]
          }
        }
      }
    ]
  }
}
```

```

    ]
  }
  Telephone: { // override the matches for the telephone child records
    item: [
      {
        rowid: "T1",
        MERGE: {
          item: [ // to remove merge candidates for T1, specify null
            null,
            null
          ],
          $original: {
            item: [
              {rowid: "T2"},
              {rowid: "T3"}
            ]
          }
        }
      },
      {
        rowid: "T4",
        MERGE: {
          item: [ // to add or override matches, specify matched records
            {rowid: "T2"}
          ],
          $original: {
            item: [
              null
            ]
          }
        }
      }
    ]
  }
}

```

## Response Header

When the response is successful, the API returns the interactionId and the processId in the response header and the record details in the response body.

If the process generates an interaction ID and uses it to create the record, the API returns the interaction ID. If the process starts a workflow instead of directly saving the record to the database, the API returns the process ID which is the ID of the workflow process

The following example shows a response header with an interaction ID and a process ID:

```

BES-interactionId: 72200000242000
BES-processId: 15948

```

The response body contains the record with the generated rowIds.

## Sample API Request

The following sample request updates a root record and its child record in a business entity. Person is the business entity and Phone is a child base object. The request adds a comment and attachment to the workflow task triggered by the API.

```

POST http://localhost:8080/cmxcs/localhost-orcl-DS_UI1/Person/233?systemName=Admin
{
  rowidObject: "233",
  firstName: "BOB",
  lastName: "LLOYD",
  Phone: {
    item: [
      {
        rowidObject: "164",

```

```

        phoneNumber: "777-77-77",
        $original: {
            phoneNumber: "(336) 366-4936"
        }
    ]
},
$original: {
    firstName: "DUNN"
}
}

```

## Sample API Response

The following sample response shows the response header and body after successfully updating a record:

```

BES-interactionId: 72300000001000
BES-processId: 16302
{
  Person: {
    key: {
      rowid: "233",
      sourceKey: "SYS:233"
    },
    rowidObject: "233",
    preferredPhone: {
      key: {}
    }
  }
}

```

## Delete Record

The Delete Record REST API deletes a root record in a business entity. Use the API to delete the child records of a root record.

The API uses the DELETE method to delete a record.

### Request URL

The Delete record URL has the following format:

```

http://<host>:<port>/<context>/<database ID>/<business entity>/<rowID of the root
record>?systemName=Admin

```

**Note:** The name of the source system as a required parameter in the URL.

Make the following HTTP DELETE request to the Delete Record URL:

```

DELETE http://<host>:<port>/<context>/<database ID>/<business entity>/<rowID of the
record>?systemName=Admin

```

Use the following URL format to delete a child record of a root record:

```

DELETE http://<host>:<port>/<context>/<database ID>/<business entity>/<rowID of the
record>/<child base object>/<rowID of the child record>?systemName=Admin

```



## Query Parameter

The name of the source system is a required URL parameter. Use the `systemName` parameter to specify the source system.

## Sample API Request

The following sample request deletes a root record in the Person business entity:

```
DELETE http://localhost:8080/cmxcsllocalhost-orcl-DS_UI1/Person/292258?systemName=Admin
```

## Sample API Response

The following sample response shows the response after successfully deleting a root record in the Person business entity:

```
{
  "Person": {
    "key": {
      "rowid": "292258",
      "sourceKey": "WRK50000_7016"
    },
    "rowidObject": "292258"
  }
}
```

## List Record

The List Record REST API returns the list of lookup values or foreign key values. Lookups provide reference data and give a list of possible values for a given column.

The API uses the GET method.

Use the API to also get the lookup code values and lookup code descriptions. You can specify the sort order for the lookups. Use the POST method when you need more and complex parameters.

## Request URL

The List Record REST URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<lookup table>?action=list
```

Make the following HTTP GET request to the URL:

```
GET http://<host>:<port>/<context>/<database ID>/<lookup table>?action=list
```

Use the following URL format to list the codes of the lookup values:

```
http://<host>:<port>/<context>/<database ID>/<lookup table>?action=list&idlabel=<lookup code>%3A<lookup display name>
```

**Note:** Use the Get Metadata API to get the exact URL to list the lookup values.

## Query Parameters

You can append the query parameters to the request URL to filter the results.

The following table lists the query parameters:

Parameter	Description
suppressLinks	Indicates whether the parent-child links are visible in the API response. Set the parameter to true to suppress all parent-child links in the response. Default is false.  For example, the <code>Person/1242?depth=10&amp;suppressLinks=true</code> query will display the record details up to 10 child levels, with no parent-child links visible in the response.
order	Used to list the lookup values in ascending or descending order. Use the character + as prefix to specify ascending order and the character - as prefix to specify descending order. By default, when you do not specify the prefix, the result set is ordered in ascending order.  For example, the <code>LUNamePrefix?action=list&amp;order=-namePrefixDisp</code> query lists the prefixes for name, which are sorted by the display names of the prefixes in descending order.

## POST Request to Specify Sort Order

Use a POST request to specify the sort order for the lookup values. Include the parameters or fields in the POST body.

The following example shows how to use the POST request for a list operation:

```
http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/ListCO.json
{
  parameters:
  {
    coFilter: {
      object: {
        name: "LUCountry",
        order: "-countryNameDisp"
      }
    }
  }
}
```

## Sample API Request

The following sample request list the lookup values:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/LUGender?action=list
```

The following sample request lists the codes for the gender lookup values:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/LUGender?
action=list&idlabel=genderCode%3AgenderDisp
```

The following sample request lists the prefixes for names, with the display names of the prefixes in descending order:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/LUNamePrefix?action=list&order=-
namePrefixDisp
```

## Sample API Response

The following sample response shows the list of lookup values:

```
{
  "firstRecord": 1,
  "pageSize": 2147483647,
  "searchToken": "SVR1.AU5LC",
  "item": [
    {
      "rowidObject": "1",
      "genderDisp": "UNKNOWN",
      "genderCode": "N"
    },
    {
      "rowidObject": "2",
      "genderDisp": "MALE",
      "genderCode": "M"
    },
    {
      "rowidObject": "3",
      "genderDisp": "FEMALE",
      "genderCode": "F"
    }
  ]
}
```

The following sample response shows the code for the lookup values:

```
{
  "item": [
    {
      "id": "F",
      "label": "FEMALE"
    },
    {
      "id": "M",
      "label": "MALE"
    },
    {
      "id": "N",
      "label": "UNKNOWN"
    }
  ],
  "firstRecord": 1,
  "recordCount": 0,
  "pageSize": 2147483647,
  "searchToken": "SVR1.AU5LD"
}
```

## Search Record

The Search Record REST API searches for indexed values in a searchable root record and in all the child records. You can use filters and facets to view a subset of the search results. Facets group the search results into categories, while filters narrow down the search results. The API searches all fields that are configured as searchable and returns the records that match the search criteria.

The API uses the GET method to search the indexes of the searchable fields.

### Request URL

The Search Record URL has the following formats:

#### URL for a simple search

Use the following URL for a simple search:

```
http://<host>:<port>/<context>/<database ID>/<business entity>?q=<string value>
```

Make the following HTTP GET request to the Search Record URL:

```
GET http://<host>:<port>/<context>/<database ID>/<business entity>?q=<string value>
```

#### **URL for a fielded search**

Use the following URL for a fielded search:

```
http://<host>:<port>/<context>/<database ID>/<business entity>?fq=<business entity field name>='<business entity field value>'
```

If you specify a negative numerical value for a business entity field, such as -120, the ranking of the records that are returned might be affected.

#### **URL for a facets search**

Use the following URL for a simple search with facets:

```
http://<host>:<port>/<context>/<database ID>/<business entity>?q=<string value>&facets=<field name>
```

Use the following URL for a fielded search with facets:

```
http://<host>:<port>/<context>/<database ID>/<business entity>?fq=<business entity field name>='<business entity field value>'&facets=<field name>
```

#### **URL for a filter search**

Use the following URL for a simple search with filters:

```
http://<host>:<port>/<context>/<database ID>/<business entity>?q=<string value>&filters=<field name1>=<field value1> AND <field name2>=<field value2> ...
```

Use the q or the fq parameter in the search.

#### **URL encoding**

Use URL encoding because the URL includes characters, such as spaces and single quotation marks.

The following example shows the URL encoded representation of the Search Record URL:

```
http://<host>:<port>/<context>/<database ID>/<business entity>?q=<field name>%3D%27<value of the field>
```

## Query Parameters

Use the `q` or the `fq` query parameters to provide the string value for the search. The `q` and the `fq` query parameters are mutually exclusive. Use the `fq` parameter for a fielded search. Use the AND logical operator for multiple conditions.

The following table lists the parameters that you can use in the URL:

Parameter	Description
<code>q</code>	<p>Specifies the string value or the search term. The query searches for occurrences of the search term anywhere in a record. Used in a simple search.</p> <p>For example, the <code>Person?q=STEVE</code> query searches for records with the term STEVE.</p> <p>To search for two or more terms together, include the terms in double quotation marks. Use the character <code>+</code> before each term if you want the search results to contain the term. If the field value contains a space, enclose the field value in single quotes.</p> <p>Use the following query to search for an exact match to WILLIAM JOHN LAWSON:</p> <pre>Person?q="WILLIAM JOHN LAWSON"</pre> <p>Use the following query to search for WILLIAM, JOHN or LAWSON:</p> <pre>Person?q=WILLIAM JOHN LAWSON</pre> <p>Use the following query to search for WILLIAM, JOHN, and LAWSON:</p> <pre>Person?q=WILLIAM JOHN LAWSON&amp;queryOperator=AND</pre> <p><b>Note:</b> When you run a search query with the <code>q</code> parameter, if the data (filter value) contains the <code>&amp;</code> special character, the value must be encoded as <code>%26</code>. Otherwise, the results are not visible.</p>
<code>fq</code>	<p>Specifies the string value or search term in a particular field. The query searches for the term only in that part of a record. Used in a targeted search based on indexed fields.</p> <p>For example, the <code>Person?fq=displayname=STEVE</code> query searches for records with the display name STEVE.</p> <p><b>Note:</b> When you run a search query with the <code>fq</code> parameter, if the data (filter value) contains the <code>&amp;</code> special character, the value must be encoded as <code>%26</code>. Otherwise, the results are not visible.</p>
<code>facets</code>	<p>Specifies the fields that should be treated as facets or categories by which the search results are grouped. Specify only searchable fields. Used with the <code>q</code> and the <code>fq</code> parameters. Syntax is <code>&amp;facets=FieldName1,FieldName2,FieldNameN</code></p> <p>For example, the <code>Person?q=STEVE&amp;facets=department</code> query searches for persons with the display name STEVE and groups the search results by the departments. The search displays the records of the persons with the display name STEVE and these records are grouped by the departments.</p>
<code>filters</code>	<p>Specifies the fields by which you can narrow down the search results. Specify only filterable fields. Used with the <code>q</code> and the <code>fq</code> parameters.</p> <p>For example, the <code>Person?fq=STEVE&amp;filters=birthdate='1980-11-27T08:00:00Z'</code> query searches for persons with the display name STEVE and filters the search results by the birth date. The search displays the records of the persons who have the display name STEVE and whose date of birth is 27 November, 1980.</p> <p><b>Note:</b> Specify a date within single quotation marks.</p>

Parameter	Description
depth	<p>Specifies the number of child levels to return. Specify 2 to return the root node and its direct children, and 3 to return the root node, direct children, and grandchildren. Specify 1 to return the root node alone. By default, no depth is specified.</p> <p>If no depth is specified, then the search results return the root node and children where a match for the search term is found.</p> <p>For example, the <code>Person?q=STEVE&amp;depth=2</code> query searches for records with the term STEVE and returns information about the root record and its direct children.</p>
queryOperator	<p>Specifies whether the search finds any of the strings in the search term or all of the strings in the search term.</p> <p>The parameter takes one of the following values:</p> <ul style="list-style-type: none"> <li>- OR. Searches for any of the strings listed in the <code>f</code> or <code>fq</code> parameter.</li> <li>- AND. Searches for all of the strings listed in the <code>f</code> or <code>fq</code> parameter.</li> </ul> <p>If you do not specify this parameter, the default is OR.</p> <p>For example, the <code>Person?q=WILLIAM JOHN LAWSON&amp;queryOperator=AND</code> query searches for records that contains WILLIAM, JOHN, and LAWSON.</p>
suppressLinks	<p>Indicates whether the parent-child links are visible in the API response. Set the parameter to true to suppress all parent-child links in the response. Default is false.</p> <p>For example, the <code>Person?q=STEVE&amp;suppressLinks=true</code> query searches for records with the term STEVE and returns the response where no parent-child links are visible.</p>
readSystemFields	<p>Indicates whether to return the system fields in the result. Default is false.</p>
order	<p>Comma-separated list of field names with an optional prefix of + or -. The prefix + indicates to sort the results in ascending order, and the prefix - indicates to sort the results in descending order. Default is +.</p> <p>If you want to use a child field to sort the results, use the full name of the field. For example, <code>BillAddresses.Address.cityName</code>.</p> <p>When you specify more than one parameter, the result set is ordered by the parameter that is first in the list, followed by the next. For example, the <code>Person?order=displayName,-BillAddresses.Address.cityName</code> query sorts the results by display name in ascending order and then by city name in descending order.</p>
maxRecordsToSort	<p>Maximum number of search results that you want to sort. Default is 1000.</p>

**Specify a range with the `filters` parameter:**

You can use the `filters` parameter to narrow down the search results within a specified range. You can specify the range for filterable fields of the numeric and the date data types.

Use the following format for the integer data type:

```
fieldName1=[fromValue,toValue]
```

The range is from the `fromValue` to the `toValue`. Ensure that the `fromValue` is lower than the `toValue`. For example, the `filters=age=[35,45]` query narrows the search results and searches for records in the age group of 35 to 45.

Use the following format for the date data type:

```
fieldName1=[fromDate,toDate]
```

The range is from the `fromDate` to the `toDate`. For example, the `filters=birthdate=[2000-06-12T12:30:00Z,2015-06-12T12:30:00Z]` query specifies the date of birth between 12 June 2000 and 12 June 2015.

**Note:** When you specify a exact match date filter, enclose it within single quotation marks. When you specify a date range, do not use quotation marks.

## RELATED TOPICS:

- [“Formats for Dates and Time in UTC” on page 30](#)

## Sample API Request

### Request with the q parameter

The following sample request searches the Person business entity for records with the name STEVE.

```
GET http://localhost:8080/cmxcsllocalhost-orcl-DS_UI1/Person?q=STEVE
```

### Request with the fq parameter

The following sample request searches the Person business entity for records with the display name STEVE. The displayName field is an indexed field.

```
GET http://localhost:8080/cmxcsllocalhost-orcl-DS_UI1/Person?fq=displayName=STEVE
```

### Request with the sort option

The following sample request searches the Person business entity for records with the display name STEVE and sorts the results by city in ascending order:

```
GET http://localhost:8080/cmxcsllocalhost-orcl-DS_UI1/Person?fq=displayName=STEVE&order=BillAddresses.Address.cityName
```

### Request with the fq parameter and the AND logical operator

The following sample request searches the Person business entity for records with the display name STEVE and the tax ID DM106:

```
GET http://localhost:8080/cmxcsllocalhost-orcl-DS_UI1/Person?fq=displayName=STEVE AND taxId=DM106
```

### Request with a facet

The following sample request searches the Person business entity for records with the display name STEVE and narrows down the results by grouping them into departments:

```
GET http://localhost:8080/cmxcsllocalhost-orcl-DS_UI1/Person?fq=displayName=STEVE&facets=department
```

### Request with a filter (exact filter)

The following sample request searches the Person business entity for records with the display name STEVE and filters by the specified city and country:

```
GET http://localhost:8080/cmxcsllocalhost-orcl-DS_UI1/Person?fq=displayName=STEVE&filters=cityName=Canberra AND country=Australia
```

### Request with a filter range

The following sample request searches the Person business entity for records with display name STEVE and filters by the age group 35 to 45:

```
GET http://localhost:8080/cmxcsllocalhost-orcl-DS_UI1/Person?fq=displayName=STEVE&filters=age=[35,45] AND cityName=Canberra
```

## Sample API Response

The following sample response shows the result of a search by the name STEVE:

```
{
  "firstRecord": 1,
  "recordCount": 2,
  "pageSize": 10,
  "item": [
    {
      "Person": {
        "link": [
          {
            "href": "http://localhost:8080/cmxcsllocalhost-orcl-DS_UI1/
Person/1443",
            "rel": "self"
          },
          {
            "href": "http://localhost:8080/cmxcsllocalhost-orcl-DS_UI1/
Person/1443?depth=2",
            "rel": "children"
          }
        ],
        "rowidObject": "1443",
        "label": "CRAIG, STEVE",
        "partyType": "Person",
        "lastName": "CRAIG",
        "firstName": "STEVE",
        "taxID": "stevecraig",
        "displayName": "STEVE CRAIG"
      }
    },
    {
      "Person": {
        "link": [
          {
            "href": "http://localhost:8080/cmxcsllocalhost-orcl-DS_UI1/
Person/285",
            "rel": "self"
          },
          {
            "href": "http://localhost:8080/cmxcsllocalhost-orcl-DS_UI1/
Person/285?depth=2",
            "rel": "children"
          }
        ],
        "rowidObject": "285",
        "label": "PEARSON, STEVE",
        "partyType": "Person",
        "lastName": "PEARSON",
        "firstName": "STEVE",
        "displayName": "STEVE PEARSON"
      }
    }
  ]
}
```

## Suggester

The Suggester REST API returns a list of related terms for a search string, based on the data present in your database. Use the API to accept the characters that you type in a user interface field and return suggestions to autocomplete what you type. You can find and select the string from the list of suggestions. Use the Suggester API for searchable fields.

The API uses the GET method.

**Note:** To use the API to provide a list of autocomplete suggestions for a searchable field, set the `suggester` property of the field to true and reindex the data.



## Request URL

The Suggester REST URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>?suggest=<string>
```

Make the following HTTP GET request to the URL:

```
GET http://<host>:<port>/<context>/<database ID>/<business entity>?suggest=<string>
```

## Query Parameters

The following table lists the query parameters:

Parameter	Description
suggest	Required. Specifies the string that you want suggestions for.
recordsToReturn	Specifies the number of rows to return.
buildIndex	Optional. Indicates whether to build the index. When you restart the system, set this parameter to true to explicitly build the index for the collection. This parameter might be deprecated in a future release.

## Sample API Request

The following sample request returns a list of suggestions that you can use in a user interface:

```
GET http://localhost:8080/cmx/cs/localhost-infa-DS_UI1/Person.json?suggest=Abhinav
```

## Sample API Response

The following sample response shows the list of suggestions:

```
{
  term: [2]
  "abhinav goel"
  "abhinav gupta"
}
```

## SearchQuery

The SearchQuery REST API searches for records that are an exact match of the field values specified in a query. You can use the SearchQuery API to retrieve all the records for a specific business entity or to retrieve records based on specific field values. Unlike the Search Records API that searches for the specified values across all the searchable fields, the SearchQuery API searches for the specified values within specific fields.

You can filter the query results to display specific values in a root business entity record and in the child records. You can use the AND, IN, and RANGE operators in the query.

To include specific fields in the query results, specify the fields or a business entity view that includes the fields. You can sort the query results to view the records in ascending or descending order.

The API uses the GET method.

## Request URL

The context for the SearchQuery URL is `cmx/cs`. In a Hosted MDM environment, include the tenant name in the context, such as `<tenant name>/cmx/cs`.

The SearchQuery URL has the following formats:

### URL to return all the records of a specific business entity type

Use the following URL to search for all the records of the specified business entity type:

```
http://<host>:<port>/<context>/<database ID>/<business entity>?action=query
```

Make the following HTTP GET request to the SearchQuery URL:

```
GET http://<host>:<port>/<context>/<database ID>/<business entity>?action=query
```

### URL to return all the details of records that match the specified field values

Use the following URL to search for records that match the field values that you specify:

```
http://<host>:<port>/<context>/<database ID>/<business entity>?
action=query&filter=<business entity field name 1>='<business entity field value 1>'
AND <business entity field name 2>='<business entity field value 2>'...AND <business
entity field name n>='<business entity field value n>'
```

### URL to return specific details of records that match the specified field values

Use the following URL to search for records and display specific record fields in the search results:

```
http://<host>:<port>/<context>/<database ID>/<business entity>?
action=query&filter=<business entity field name 1>='<business entity field value 1>'
AND <business entity field name 2>='<business entity field value 2>'...AND <business
entity field name n>='<business entity field value n>''&outputView=<business entity
view>
```

## Query Parameters

Define the query as a list of field-value pairs.

The following table describes the query parameters that you can use in the URL:

Parameter	Description
action	Required. Returns all the records of the specified business entity type in the query results. Set to <code>query</code> , and use the parameter with the <code>filter</code> parameter. When used without the <code>filter</code> parameter, the query searches for all the records of the specified business entity type. For example, use the following query to search for all the Person business entity records: <code>Person?action=query</code>
filter	Required. Specifies a list of field-value pairs separated by operators. Valid operators are AND, IN, and Range. For example, use the following query to search for the Person records with the first name STEVE and the last name SMITH: <code>Person?action=query&amp;filter=firstName='STEVE' AND lastName='SMITH'</code>

Parameter	Description
depth	<p>Specifies the number of child record levels to return. For example, you can specify the following levels:</p> <ul style="list-style-type: none"> <li>- 1. Return the root record.</li> <li>- 2. Returns the root record and its direct child records.</li> <li>- 3. Returns the root record, the direct child records, and grandchild records.</li> </ul> <p>For example, use the following query to search for records with the first name STEVE and return information about the root record and its direct child records:</p> <pre>Person?action=query&amp;filter=firstName='STEVE' AND lastName='SMITH'&amp;depth=2</pre>
suppressLinks	<p>Indicates whether the parent-child links are visible in the API response. Set the parameter to true to suppress all the parent-child links in the response. Default is false.</p> <p>For example, use the following query to search for records with the first name STEVE and return a response where no parent-child links are visible:</p> <pre>Person?action=query&amp;filter=firstName='STEVE'&amp;suppressLinks=true</pre>
readSystemFields	Indicates whether to return the system fields in the result. Default is false.
fields	Specifies the fields to display in the query results.
outputView	Specifies the business entity view that you want to use to display the query results. When you configure the business entity view for the query results, include the fields that you want to display in the query results.
Order	<p>Specifies the sort order of the query results. Use the plus (+) character as prefix to specify ascending order and the minus (-) character as prefix to specify descending order. By default, the query result is in ascending order.</p> <p>When you specify more than one parameter, the result set is ordered by the parameter that is first in the list, followed by the next parameter.</p>

You can use the following operators within the filter parameter:

#### AND

Searches for records with all the field values listed in the filter parameter.

For example, use the following query to search for records with the first name STEVE and the last name SMITH:

```
Person?action=query&filter=firstName='STEVE' AND lastName='SMITH'
```

#### IN

Searches for records with any of the values listed in the filter parameter.

For example, use the following query to search for records with the first name STEVE or JOHN:

```
Person?action=query&filter=firstName IN [STEVE,JOHN]
```

#### Range

Searches for records within a specified range. You can specify a range for the numeric and the date data type fields.

Use the following format for the integer data type:

```
<business entity field name>=[fromValue,toValue]
```

The range is from the fromValue to the toValue. Ensure that the fromValue is lower than the toValue.

For example, use the following query to search for records in the age group 35 to 45:

```
Person?action=query&filter=firstName IN [STEVE,JOHN] AND age=[35,45]
```

Use the following format for the date data type:

```
<business entity field name>=[fromDate,toDate]
```

The range is from the fromDate to the toDate.

For example, use the following query to search for records with the date of birth between 12 June 2000 and 12 June 2015:

```
Person?action=query&filter=birthDate=[2000-06-12T12:30:00Z,2015-06-12T12:30:00Z]
```

## Sample API Requests

This topic provides sample request queries.

The following sample request queries the Person business entity for records with the first name STEVE and last name SMITH:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person?
action=query&filter=firstName='STEVE' AND lastName='SMITH'&outputView=PersonAddressView
```

The following sample request queries the Person business entity for records with corresponding original ROWIDs. In this example, only one record is returned, based on the value '1' used as a unique identifier ROWID\_OBJECT for this Person.

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person?
action=query&filter=origRowidObject='1'&outputView=PersonAddressView
```

The following sample request queries the Person business entity for surviving records with corresponding ROWIDs. In this example, only one record is returned, based on the value '1' used as a unique identifier ROWID\_OBJECT for this Person.

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person?
action=query&filter=rowidObject='1'&outputView=PersonAddressView
```

## Sample API Response

The following sample response shows the results of a query for the Person records with the first name STEVE and last name SMITH:

```
{
  "link": [],
  "firstRecord": 1,
  "pageSize": 10,
  "searchToken": "SVR1.1T8UU",
  "facet": [],
  "item": [
    {
      "Person": {
        "rowidObject": "268",
        "label": "Person: SMITH, STEVE,268",
        "partyType": "Person",
        "lastName": "SMITH",
        "displayName": "STEVE SMITH",
        "firstName": "STEVE"
      }
    },
    {
      "Person": {
        "rowidObject": "448",
        "label": "Person: SMITH, STEVE,448",
        "partyType": "Person",
        "lastName": "SMITH",
        "displayName": "STEVE SMITH",

```

```

    "firstName": "STEVE"
  }
}
]
}

```

## Exporting the SearchQuery Results to a CSV File

To export the results of a SearchQuery request to a CSV file, in the request URL path, specify the name of the business entity as a .CSV file. You can use all the query parameters in the request URL.

For example, use the following request URL to export the results of a search for records that match the field values that you specify:

```

http://<host>:<port>/<context>/<database ID>/<business entity>.CSV?
action=query&filter=<business entity field name 1>='<business entity field value 1>' AND
<business entity field name 2>='<business entity field value 2>'...AND <business entity
field name n>='<business entity field value n>'

```

### Sample API Request

The following sample request queries for records with the first name STEVE and last name SMITH and returns the query results in the CSV format:

```

GET http://localhost:8080/cmxcs/localhost-orcl-DS_UI1/Person.CSV?
action=query&filter=firstName='STEVE' AND
lastName='SMITH'&fields=recordID,firstName,lastName

```

### Sample API Response

The following sample shows the query results in the CSV format for a query with the first name STEVE and last name SMITH:

```

recordID,firstName,lastName
00023,Steve,Smith
00048,Steve,Smith

```

## SearchMatch

The SearchMatch REST API searches for records that are fuzzy matches. The API identifies the matching records based on specific business entity fields that are configured as match columns in the MDM Hub. Before you use the SearchMatch API, use the List Match Columns API to identify the match columns for a business entity.

Optionally, you can specify a match rule set instead of match columns. To use a match rule set for the query, ensure that the Enable Search by Rules option is enabled for the match rule set. For information on configuring match columns and match rule sets, see the *Multidomain MDM Configuration Guide*.

You can use the AND, IN, and RANGE operators in the query.

To include specific fields in the query results, specify the fields or a business entity view that includes the fields. You can specify the sort order to view the records in the query results in ascending or descending order.

The API uses the GET method to query the business entity fields and returns the records that are fuzzy matches along with their match scores and associated match rules.

### Request URL

The context for the SearchMatch URL is cmxcs. In a Hosted MDM environment, include the tenant name in the context, such as <tenant name>/cmxcs.

The SearchMatch URL has the following formats:

### URL to return matching records based on the values of specific fields that are configured as match columns

Use the following URL to search for records that match the field values that you specify:

```
http://<host>:<port>/<context>/<database ID>/<business entity>?
action=match&fuzzyFilter=<business entity field name 1>=<business entity field
value 1>,<business entity field name 2>=<business entity field value
2>,...<business entity field name n>=<business entity field value n>
```

Make the following HTTP GET request to the SearchMatch URL:

```
GET http://<host>:<port>/<context>/<database ID>/<business entity>?
action=match&fuzzyFilter=<business entity field name 1>=<business entity field
value 1>,<business entity field name 2>=<business entity field value
2>,...<business entity field name n>=<business entity field value n>
```

### URL to return matching records based on a match rule set

Use the following URL to search for matching records based on a match rule set that you specify:

```
http://<host>:<port>/<context>/<database ID>/<business entity>?
action=match&fuzzyFilter=<business entity field name 1>=<business entity field
value 1>,<business entity field name 2>=<business entity field value
2>,...<business entity field name n>=<business entity field value
n>&matchRuleSet=<match rule set name>
```

## Query Parameters

Use the `fuzzyFilter` parameter to specify the field values that you want to query. Use the `fuzzyFilter` parameter with the `action` parameter.

The following table describes the query parameters that you can use in the URL:

Parameter	Description
<code>action</code>	Required. Returns the matching records for the specified business entity. Set to <code>match</code> , and use the parameter with the <code>fuzzyFilter</code> parameter. For example, use the following query to search for a person with the first name STEVE: <code>Person?action=match&amp;fuzzyFilter=STEVE</code>
<code>fuzzyFilter</code>	Required. Specifies a comma-separated list of field name and field value pairs that you want to use to query for records of a specific business entity type. For example, use the following query to search for records with the first name STEVE, who have a Toronto address: <code>Person?action=match&amp;fuzzyFilter=firstName=STEVE,Address.Address.City=TORONTO</code>
<code>matchRuleSet</code>	Specifies a match rule set based on which you want to identify the matching records. If you do not have a specific match rule set, specify <code>NONE</code> . The automatic and the manual merge match rules are used.
<code>filter</code>	Specifies the field values to use to filter the results of a fuzzy search. For example, use the following query to search for records with the first name STEVE, who live in Toronto: <code>Person? action=match&amp;fuzzyFilter=firstName='STEVE',lastName='SMITH'&amp;filter=city=Toronto</code>

Parameter	Description
depth	<p>Specifies the number of child record levels to return. For example, you can specify the following levels:</p> <ul style="list-style-type: none"> <li>- 1. Return the root record.</li> <li>- 2. Returns the root record and its direct child records.</li> <li>- 3. Returns the root record, the direct child records, and grandchild records.</li> </ul> <p>For example, use the following query to search for records with the first name STEVE and return information about the root record and its direct child records:</p> <pre>Person?action=match&amp;fuzzyFilter=firstName='STEVE'&amp;filter=city=Toronto</pre>
suppressLinks	<p>Indicates whether the parent-child links are visible in the API response. Set the parameter to true to suppress all the parent-child links in the response. Default is false.</p> <p>For example, use the following query to search for records with the first name STEVE and return a response where no parent-child links are visible:</p> <pre>Person?action=match&amp;fuzzyFilter=firstName='STEVE'&amp;suppressLinks=true</pre>
readSystemFields	Indicates whether to return the system fields in the result. Default is false.
fields	Specifies the fields to display in the query results.
outputView	Specifies the business entity view that you want to use to display the query results. When you configure the business entity view for the query results, include the fields that you want to display in the query results.

You can use the following operators within the filter parameter:

#### AND

Searches for records with all the field values listed in the filter parameter.

For example, use the following query to search for records with the first name STEVE and the last name SMITH:

```
Person?
action=match&fuzzyFilter=firstName='STEVE',lastName='SMITH'&filter=city=Toronto AND
gender=Male
```

#### IN

Searches for records with any of the values listed in the filter parameter.

For example, use the following query to search for records with the first name STEVE or last name JOHN, who live in the city Toronto or Ottawa:

```
Person?action=match&fuzzyFilter=firstName='STEVE',lastName='SMITH'&filter=city in
[Toronto,Ottawa]
```

#### Range

Searches for records within a specified range. You can specify a range for the numeric and the date data type fields.

Use the following format for the integer data type:

```
<business entity field name>=[fromValue,toValue]
```

The range is from the fromValue to the toValue. Ensure that the fromValue is lower than the toValue.

For example, use the following query to search for records in the age group 35 to 45:

```
Person?action=match&fuzzyFilter=firstName='STEVE',lastName='SMITH'&filter=age=[35,45]
```

Use the following format for the date data type:

```
<business entity field name>=[fromDate,toDate]
```

The range is from the fromDate to the toDate.

For example, use the following query to search for records with the date of birth between 12 June 2000 and 12 June 2015:

```
Person?
action=match&fuzzyFilter=firstName='STEVE',lastName='SMITH'&filter=birthDate=[2000-06-12T12:30:00Z,2015-06-12T12:30:00Z]
```

## Sample API Request

The following sample request queries the Person business entity for records with the first name STEVE by using the match rule set IDL2:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person?
action=match&fuzzyFilter=firstName=STEVE&matchRuleSet=IDL2
```

## Sample API Response

The following sample response shows the results of a query for records with the first name STEVE based on the match rule set IDL2:

```
{
  "link": [],
  "firstRecord": 1,
  "recordCount": 3,
  "pageSize": 10,
  "searchToken": "SVR1.17LJ2",
  "matchedEntity": [
    {
      "businessEntity": {
        "Person": {
          "rowidObject": "145",
          "label": "SAMUEL,STEVE",
          "partyType": "Person",
          "lastName": "SAMUEL",
          "displayName": "MR STEVE SAMUEL",
          "statusCd": "A",
          "firstName": "STEVE",
          "genderCd": {
            "genderCode": "M"
          },
          "namePrefixCd": {
            "namePrefixCode": "MR"
          }
        }
      },
      "matchRule": "IDL2|1",
      "matchScore": "93",
      "link": [
        {
          "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI2/meta/matchRule/Person/IDL2|1.json",
          "rel": "matchRule"
        }
      ]
    },
    {
      "businessEntity": {
        "Person": {
          "rowidObject": "268",
          "label": "SMITH,STEVE",
          "partyType": "Person",
          "lastName": "SMITH",
```



```

        "displayName": "STEVE SMITH",
        "firstName": "SAM"
    }
},
"matchRule": "IDL2|1",
"matchScore": "98",
"link": [
    {
        "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI2/meta/matchRule/
Person/IDL2|1.json",
        "rel": "matchRule"
    }
]
},
{
    "businessEntity": {
        "Person": {
            "rowidObject": "448",
            "label": "SMITH,STEVEN",
            "partyType": "Person",
            "lastName": "SMITH",
            "displayName": "SAM STEVEN",
            "firstName": "STEVEN"
        }
    },
    "matchRule": "IDL2|1",
    "matchScore": "98",
    "link": [
        {
            "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI2/meta/matchRule/
Person/IDL2|1.json",
            "rel": "matchRule"
        }
    ]
}
],
"facet": []
}

```

## Exporting the SearchMatch Results to a CSV File

To export the results of a SearchMatch request as a CSV file, in the request URL path, specify the name of the business entity as a .CSV file. You can use all the query parameters in the request URL.

For example, use the following request URL to export the results of a search for matching records based on a match rule set:

```

http://<host>:<port>/<context>/<database ID>/<business entity>.CSV?
action=match&fuzzyFilter=<business entity field name 1>=<business entity field value
1>,<business entity field name 2>=<business entity field value 2>,...<business entity
field name n>=<business entity field value n>&matchRuleSet=<match rule set name>

```

### Sample API Request

The following sample request searches for records that match the first name STEVE and last name SMITH and returns the query results in the CSV format:

```

GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person.CSV?
action=match&fuzzyFilter=firstName=STEVE,lastName=SMITH&fields=recordID,firstName,lastNam
e

```

### Sample API Response

The following sample shows the query results for records that match the first name STEVE and last name SMITH in the CSV format:

```

recordID,firstName,lastName
00023,Steve,Smith

```

```
00035, Steven, Smith
00048, Steve, Smith
00079, Steve, Smithson
```

## Get BPM Metadata

The Get BPM Metadata REST API returns the task types and two indicators that specify whether the BPM workflow tool can perform the Get Task Lineage service and the administration services.

The API uses the GET method.

### Request URL

The Get BPM Metadata URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/BPMMetadata
```

Make the following HTTP GET request to the Get BPM Metadata URL:

```
GET http://<host>:<port>/<context>/<database ID>/BPMMetadata
```

### Sample API Request

The following sample request returns information about the task types and the BPM workflow tool:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/BPMMetadata
```

### Sample API Response

The following sample response shows the task types and the value of the two indicators for the BPM workflow tool:

```
{
  "parameters": {
    "doesSupportAdministration": true,
    "doesSupportLineage": true,
    "doesSupportAttachments": true,
    "maximumAttachmentFileSizeInMb": 20,
    "taskTypes": {
      "taskTypes": [
        {
          "name": "Merge",
          "label": "Merge"
        },
        {
          "name": "FinalReview",
          "label": "FinalReview"
        },
        {
          "name": "Update",
          "label": "Update"
        },
        {
          "name": "Notification",
          "label": "Notification"
        },
        {
          "name": "ReviewNoApprove",
          "label": "ReviewNoApprove"
        },
        {
          "name": "Unmerge",
          "label": "Unmerge"
        }
      ]
    }
  }
}
```

```
}  
}
```

## List Tasks

The List Tasks API returns a list of workflow tasks. A workflow defines the activities in a business process and the paths of execution through the activities. Each activity is called a task.

The API uses the GET method to return a sorted and paged list of tasks.

### Request URL

The List Tasks URL has the following format.

```
http://<host>:<port>/<context>/<database ID>/task
```

Make the following HTTP GET request to the List Tasks URL:

```
GET http://<host>:<port>/<context>/<database ID>/task
```

You can add HTTP headers to the request.

### Query Parameters

Use the task data fields as query parameters to filter the list of tasks.

You can use the following query parameters:

Parameter	Description
taskType	A set of actions that you can perform on a record. Use the name attribute to specify the task type. For more information about task types, see the <i>Multidomain MDM Data Director Implementation Guide</i> .
taskId	ID of the task.
processId	ID of the workflow process that contains the task.
owner	User who performs the task.
title	Short description for the task.
status	Status of the task in the workflow. Use one of the following two values: - Open: Task has not started or is in progress. - Closed: Task is completed or is cancelled.
priority	Level of importance of the task. Use one of the following values: high, normal, and low.
creator	User who creates the task.
createDateBefore and createDateAfter	Date range. You can filter the tasks by the createDate field.
dueDateBefore and dueDateAfter	Date range. You can filter the tasks by the dueDate field.

Parameter	Description
scope	Shows available tasks based your user role. Use the <code>admin</code> value to filter the list of tasks based on your role. <b>Note:</b> Users assigned the Task Administrator role can manage all tasks, while users assigned other user roles can only manage tasks available to their role.
q	Specifies the search term. The query searches for occurrences of the search term in tasks related to business entity records. For example, the <code>q=KAREN</code> query searches tasks with the search term KAREN.

Use the query parameters as name-value pairs in the request URL.

The following example shows how to use the query parameters to filter tasks:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/task?
scope=admin&recordsToReturn=100&owner=sergey&status=OPEN&q=KAREN
```

## RELATED TOPICS:

- [“Formats for Dates and Time in UTC” on page 30](#)

## Sort Parameters

To determine the sort order in the REST API response, use the generic sort parameter and provide a comma-separated list of task fields. You can specify the sort order for each field. Use the dash sign (-) to specify descending order. The default sort order is ascending.

The following example shows how to sort the results:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/task?
recordsToReturn=100&owner=sergey&status=OPEN&sort=-priority
```

## Sample API Request

The following sample request retrieves the list of tasks:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/task
```

The request does not contain a body.

## Sample API Response

The following sample response shows the list of tasks in the JSON format:

```
{
  "firstRecord": 1,
  "recordCount": 10,
  "pageSize": 10,
  "task": [
    {
      "link": [
        {
          "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/task/
urn:b4p2:15443",
          "rel": "self"
        }
      ]
    },
    "taskType": {
```

```

      "name": "ReviewNoApprove",
      "label": "Review No approve",
      "taskKind": "REVIEW",
      "taskAction": [
        {
          "name": "Escalate",
          "label": "Escalate",
          "nextTaskType": "AVOSBeFinalReview",
          "comment": "AS_REQUIRED",
          "attachment": "NEVER",
          "manualReassign": false,
          "closeTaskView": true,
          "cancelTask": false
        },
        {
          "name": "Reject",
          "label": "Reject",
          "nextTaskType": "AVOSBeUpdate",
          "comment": "MANDATORY",
          "attachment": "MANDATORY",
          "manualReassign": false,
          "closeTaskView": true,
          "cancelTask": false
        },
        {
          "name": "Disclaim",
          "label": "Disclaim",
          "nextTaskType": "AVOSBeReviewNoApprove",
          "comment": "AS_REQUIRED",
          "attachment": "NEVER",
          "manualReassign": false,
          "closeTaskView": true,
          "cancelTask": false
        }
      ],
      "pendingBVT": true,
      "updateType": "PENDING"
    },
    "taskId": "urn:b4p2:15443",
    "title": "Review changes in SMITH,SMITH",
    "dueDate": "2015-07-15T21:45:59-07:00",
    "status": "OPEN",
    "priority": "NORMAL",
    "businessEntity": "Person"
  },
  {
    "link": [
      {
        "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/task/urn:b4p2:15440",
        "rel": "self"
      }
    ],
    "taskType": {
      "name": "ReviewNoApprove",
      "label": "Review No approve",
      "taskKind": "REVIEW",
      "pendingBVT": true,
      "updateType": "PENDING"
    },
    "taskId": "urn:b4p2:15440",
    "title": "Review changes in SMITH,JOHN",
    "dueDate": "2015-07-15T21:37:50-07:00",
    "status": "OPEN",
    "priority": "NORMAL",
    "businessEntity": "Person"
  },
  {
    "link": [
      {
        "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/task/

```

```

urn:b4p2:15437",
    "rel": "self"
  }
],
"taskType": {
  "name": "ReviewNoApprove",
  "label": "Review No approve",
  "taskKind": "REVIEW",
  "taskAction": [
    {
      "name": "Reject",
      "label": "Reject",
      "nextTaskType": "AVOSBeUpdate",
      "comment": "AS_REQUIRED",
      "attachment": "MANDATORY",
      "manualReassign": false,
      "closeTaskView": true,
      "cancelTask": false
    }
  ],
  "pendingBVT": true,
  "updateType": "PENDING"
},
"taskId": "urn:b4p2:15437",
"title": "Review changes in SMITH,JOHN",
"dueDate": "2015-07-15T21:34:32-07:00",
"status": "OPEN",
"priority": "NORMAL",
"businessEntity": "Person"
},
{
  "link": [
    {
      "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/task/
urn:b4p2:14820",
      "rel": "self"
    }
  ],
  "taskType": {
    "name": "ReviewNoApprove",
    "label": "Review No approve",
    "taskKind": "REVIEW",
    "pendingBVT": true,
    "updateType": "PENDING"
  },
  "taskId": "urn:b4p2:14820",
  "title": "Review changes in STAS,STAS",
  "dueDate": "2015-07-14T10:40:51-07:00",
  "status": "OPEN",
  "priority": "NORMAL",
  "businessEntity": "Person"
},
{
  "link": [
    {
      "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/task/
urn:b4p2:14809",
      "rel": "self"
    }
  ],
  "taskType": {
    "name": "ReviewNoApprove",
    "label": "Review No approve",
    "taskKind": "REVIEW",
    "pendingBVT": true,
    "updateType": "PENDING"
  },
  "taskId": "urn:b4p2:14809",
  "title": "Review changes in ,93C8ORScoFSA687",
  "dueDate": "2015-07-14T08:28:15-07:00",
  "status": "OPEN",

```

```

        "priority": "NORMAL",
        "businessEntity": "Person"
    },
    {
        "link": [
            {
                "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/task/
urn:b4p2:14609",
                "rel": "self"
            }
        ],
        "taskType": {
            "name": "ReviewNoApprove",
            "label": "Review No approve",
            "taskKind": "REVIEW",
            "pendingBVT": true,
            "updateType": "PENDING"
        },
        "taskId": "urn:b4p2:14609",
        "title": "Review changes in A8,A8",
        "dueDate": "2015-07-13T08:40:11-07:00",
        "status": "OPEN",
        "priority": "NORMAL",
        "businessEntity": "Person"
    },
    {
        "link": [
            {
                "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/task/
urn:b4p2:14425",
                "rel": "self"
            }
        ],
        "taskType": {
            "name": "ReviewNoApprove",
            "label": "Review No approve",
            "taskKind": "REVIEW",
            "pendingBVT": true,
            "updateType": "PENDING"
        },
        "taskId": "urn:b4p2:14425",
        "title": "Review changes in A7,A7",
        "dueDate": "2015-07-10T14:11:02-07:00",
        "status": "OPEN",
        "priority": "NORMAL",
        "businessEntity": "Person"
    },
    {
        "link": [
            {
                "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/task/
urn:b4p2:14422",
                "rel": "self"
            }
        ],
        "taskType": {
            "name": "ReviewNoApprove",
            "label": "Review No approve",
            "taskKind": "REVIEW",
            "pendingBVT": true,
            "updateType": "PENDING"
        },
        "taskId": "urn:b4p2:14422",
        "title": "Review changes in A6,A6",
        "dueDate": "2015-07-10T13:54:09-07:00",
        "status": "OPEN",
        "priority": "NORMAL",
        "businessEntity": "Person"
    },
    {
        "link": [

```

```

        {
            "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/task/
urn:b4p2:14415",
            "rel": "self"
        }
    ],
    "taskType": {
        "name": "ReviewNoApprove",
        "label": "Review No approve",
        "taskKind": "REVIEW",
        "pendingBVT": true,
        "updateType": "PENDING"
    },
    "taskId": "urn:b4p2:14415",
    "title": "Review changes in A5,A5",
    "dueDate": "2015-07-10T13:51:12-07:00",
    "status": "OPEN",
    "priority": "NORMAL",
    "businessEntity": "Person"
},
{
    "link": [
        {
            "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/task/
urn:b4p2:14355",
            "rel": "self"
        }
    ],
    "taskType": {
        "name": "Notification",
        "label": "Notification",
        "taskKind": "REVIEW",
        "pendingBVT": false,
        "updateType": "ACTIVE"
    },
    "taskId": "urn:b4p2:14355",
    "title": "Review changes in A4,A4",
    "dueDate": "2015-07-10T10:31:57-07:00",
    "status": "OPEN",
    "priority": "NORMAL",
    "businessEntity": "Person"
}
]
}

```

## Read Task

The Read Task REST API returns the details of a task, such as task type, priority, and status.

The API uses the GET method.

### Request URL

The Read Task URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/task/<taskId>
```

**Note:** Use the List Tasks API to get the ID of the task.

Make the following HTTP GET request to the Read Task URL:

```
GET http://<host>:<port>/<context>/<database ID>/task/<taskId>
```



## Sample API Request

The following sample request returns the details of a task:

```
GET http://localhost:8080/cm/cs/localhost-orcl-DS_UI1/task/urn:b4p2:16605
```

## Sample API Response

The following sample response shows the details of the task:

```
{
  "taskType": {
    "name": "ReviewNoApprove",
    "label": "Review No Approve",
    "taskKind": "REVIEW",
    "taskAction": [
      {
        "name": "Escalate",
        "label": "Escalate",
        "nextTaskType": "AVOSBeFinalReview",
        "comment": "AS_REQUIRED",
        "attachment": "NEVER",
        "manualReassign": false,
        "closeTaskView": true,
        "cancelTask": false
      },
      {
        "name": "Reject",
        "label": "Reject",
        "nextTaskType": "AVOSBeUpdate",
        "comment": "MANDATORY",
        "attachment": "MANDATORY",
        "manualReassign": false,
        "closeTaskView": true,
        "cancelTask": false
      },
      {
        "name": "Disclaim",
        "label": "Disclaim",
        "nextTaskType": "AVOSBeReviewNoApprove",
        "comment": "AS_REQUIRED",
        "attachment": "NEVER",
        "manualReassign": false,
        "closeTaskView": true,
        "cancelTask": false
      }
    ],
    "pendingBVT": true,
    "updateType": "PENDING"
  },
  "taskId": "urn:b4p2:16605",
  "processId": "16603",
  "title": "Review changes in HERNANDEZ,ALEJANDRO",
  "dueDate": "2015-07-23T01:18:39.125-07:00",
  "status": "OPEN",
  "priority": "NORMAL",
  "taskRecord": [
    {
      "businessEntity": {
        "key": {
          "rowid": "114",
          "sourceKey": "SYS:114"
        },
        "name": "Person"
      }
    },
    {
      "businessEntity": {
        "key": {
          "rowid": "114",
          "sourceKey": "SYS:114"
        },
        "name": "Person"
      }
    }
  ]
}
```

```

        "sourceKey": "SYS:114",
        "rowidXref": "4680363"
    },
    "name": "Person.XREF"
}
}
},
"creator": "avos",
"createDate": "2015-07-16T01:18:46.148-07:00",
"attachments": [
    {
        "id": "urn.b4p2:22203::file1.txt",
        "name": "file1.txt",
        "contentType": "text/plain",
        "creator": "admin",
        "createDate": "2018-02-26T14:31:05.590-05:00"
    }
],
"businessEntity": "Person",
"interactionId": "72340000003000",
"orsId": "localhost-orcl-DS_UI1"
}

```

## Create Task

The Create Task REST API creates a task and starts a workflow.

The API uses the POST method to create a task and returns the ID of the workflow process that contains the task.

### Request URL

The Create Task URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/task
```

Make the following HTTP POST request to the Create Task URL:

```
POST http://<host>:<port>/<context>/<database ID>/task
```

Add the Content-Type header to specify the media type of the data you want to send with the request:

```
POST http://<host>:<port>/<context>/<database ID>/task
Content-Type: application/<json/xml>
```

### Request Body

Specify the task attributes when you create the task. Use the JSON format or the XML format to send the task data in the request.

The following table describes the task parameters in the request body:

Parameter	Description
taskType	A set of actions that you can perform on a record. Use the name attribute to specify the task type. For more information about task types, see the <i>Multidomain MDM Data Director Implementation Guide</i> .
owner	User to whom the creator assigns the task.
title	Short description for the task.

Parameter	Description
comments	Comments for the task.
attachments	Attachments for the task.
dueDate	Date when the owner must complete the task.
status	Status of the task in the workflow. Use one of the following two values: - Open: Task has not started or is in progress. - Closed: Task is completed or is cancelled.
priority	Level of importance of the task. Use one of the following values: high, normal, and low. Default is normal.
creator	User who creates the task.
createDate	Date when you create the task.
orsId	ID of the Operational Reference Store (ORS) as registered in the Databases tool in the Hub Console.
processId	ActiveVOS® task type ID. For more information, see the <i>Multidomain MDM Data Director Implementation Guide</i> .
taskRecord	The business object root record or the cross-reference record associated with the task. Use the row ID or the source system and source key to specify the record.
businessEntity	Name of the business entity to which the taskRecord belongs.
interactionId	ID of the interaction. Use the interaction ID to keep a task context relationship between a task and records.
groups	Assign a task to all users in the specified user groups. You define user groups in the MDM Hub Console. Specify the groups as an array.

The following sample code uses the rowId to specify the taskRecord:

```
taskRecord: [{
  businessEntity: {
    name: "Person",
    key: {
      rowid: "233",
    }
  }
}]
```

The request body has the following format:

```
{
  taskType: {name:"name of the task"},
  owner: "user who performs the task",
  title: "title of the task",
  comments: "description of the task",
  attachments: [
    {
      id: "TEMP_SVR1.1VDVS"
    }
  ],
  dueDate: "date to complete the task",
  status: "status of the task",
  priority: "priority of the task",
  creator: "use who creates the task",
```

```

    createDate: "date on which the task is created",
    updatedBy: "user who last updated the task",
    lastUpdateDate: "date on which the task was last updated",
    businessEntity: "name of the business entity",
    interactionID: "ID of an interaction",
    groups: ["group name A", "group name B", ...],
    orsId: "database ID",
    processId: "ActiveVOS task type ID",
    taskRecord: [{
      businessEntity:{
        name: "name of the business entity",
        key:{
          rowid: "rowId of the record", //Use the rowId or the source system and
          source key to identify the record.
        }
      }
    }]
  }
}

```

## RELATED TOPICS:

- [“Formats for Dates and Time in UTC” on page 30](#)

## Sample API Request

The following sample request creates a task for a root record:

```

POST http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/task
{
  taskType: {name:"UpdateWithApprovalWorkflow"},
  taskId: "",
  owner: "manager",
  title: "Smoke test task",
  comments: "Smoke testing",
  dueDate: "2015-06-15T00:00:00",
  status: "OPEN",
  priority: "NORMAL",
  creator: "admin",
  createDate: "2015-06-15T00:00:00",
  updatedBy: "admin",
  lastUpdateDate: "2015-06-15T00:00:00",
  businessEntity: "Person",
  orsId: "localhost-orcl-DS_UI1",
  processId: "IDDUpdateWithApprovalTask",
  taskRecord: [{
    businessEntity:{
      name: "Person",
      key:{
        rowid: "123"
      }
    }
  }]
}

```

## Sample API Response

The following example shows the response on successfully creating a task. The API returns the ID of the workflow process that contains the task.

```

{
  "parameters": {
    "processId": "15827"
  }
}

```

# Update Task

The Update Task REST API updates a single task.

The API uses the PATCH method to update some task fields and the PUT method to update the complete task. Provide the ID of the task as the URL parameter.

## Request URL

The Update Task URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/task/<taskId>
```

**Note:** Use the List Tasks API to get the ID of the task.

Make the following HTTP PUT request to the Update Task URL to update the complete task:

```
PUT http://<host>:<port>/<context>/<database ID>/task/<taskId>
```

Make the following HTTP PATCH request to the Update Task URL to update some task fields:

```
PATCH http://<host>:<port>/<context>/<database ID>/task/<taskId>
```

Add the Content-Type header to specify the media type of the data you want to send with the request:

```
PUT http://<host>:<port>/<context>/<database ID>/task/<taskId>  
Content-Type: application/<json/xml>
```

## Request Body

Use the Read Task API to get the details of the task. Specify the task attributes when you update the task. Use the JSON format or the XML format to send the data to update in the request.

The following table describes the task parameters in the request body:

Parameter	Description
taskType	A set of actions that you can perform on a record. Use the name attribute to specify the task type. For more information about task types, see the <i>Multidomain MDM Data Director Implementation Guide</i> .
taskId	ID of the task.
owner	User who performs the task.
title	Short description for the task.
comments	Comments for the task.
attachments	Attachments for the task.
dueDate	Date when the owner must complete the task.
status	Status of the task in the workflow. Use one of the following two values: - Open: Task has not started or is in progress. - Closed: Task is completed or is cancelled.
priority	Level of importance of the task. Use one of the following values: high, normal, and low. Default is normal.

Parameter	Description
creator	User who creates the task.
createDate	Date when the task was created.
updatedBy	User who updates the task.
lastUpdateDate	Date when the task was last updated.
orsId	ID of the ORS as registered in the Databases tool in the Hub Console.
processId	ID of the workflow process that contains the task.
taskRecord	The root record or the cross-reference record associated with the task. Use the row ID or the source system and source key to specify the record.
businessEntity name	Name of the business entity to which the taskRecord belongs.

The following sample code uses the rowId to specify the taskRecord:

```
taskRecord: [{
  businessEntity:{
    name: 'Person',
    key:{
      rowid: '233',
      systemName: '',
      sourceKey: ''
    }
  }
}]
```

For a PATCH request, the request body contains those task fields that you want to change. You can change the task title, the priority, the due date, and the owner.

For a PUT request, the request body contains all task fields. Use the following request body for a PUT request:

```
{
  taskType: {name:"name of the task"},
  taskId: "ID of the task",
  owner: "user who performs the task",
  title: "title of the task",
  comments: "description of the task",
  attachments: [
    {
      id: "TEMP_SVR1.1VDVS"
    }
  ],
  dueDate: "date to complete the task",
  status: "status of the task",
  priority: "priority of the task",
  creator: "use who creates the task",
  createDate: "date on which the task is created",
  updatedBy: "user who last updated the task",
  lastUpdateDate: "date on which the task was last updated",
  businessEntity: "name of the business entity",
  orsId: "database ID",
  processId: 'ActiveVOS task type ID',
  taskRecord: [{
    businessEntity:{
      name: 'name of the business entity',
      key:{
        rowid: 'rowId of the record',//Use the rowId or the source system and source
```

```

    key to identify the record.
        systemName: '',
        sourceKey: ''
    }
  }
}

```

## RELATED TOPICS:

- [“Formats for Dates and Time in UTC” on page 30](#)

## Sample API Request

The following sample PUT request updates a complete task:

```

PUT http://localhost:8080/cmxc/cs/localhost-orcl-DS_UI1/task/urn:b4p2:15934
{
  taskType: {name:"UpdateWithApprovalWorkflow"},
  taskId: "urn:b4p2:15934",
  owner: "John",
  title: "Smoke test task - updated",
  comments: "Smoke testing - updated",
  attachments: [
    {
      id: "TEMP_SVR1.1VDVS"
    }
  ],
  dueDate: "2015-08-15T00:00:00",
  status: "OPEN",
  priority: "HIGH",
  creator: "admin",
  createDate: "2015-06-15T00:00:00",
  updatedBy: "admin",
  lastUpdateDate: "2015-06-15T00:00:00",
  businessEntity: "Person",
  orsId: "localhost-orcl-DS_UI1",
  processId: '3719',
  taskRecord: [{
    businessEntity:{
      name: 'Person',
      key:{
        rowid: '123',
        systemName: '',
        sourceKey: ''
      }
    }
  ]
}

```

The following sample PATCH request updates some task fields:

```

PATCH http://localhost:8080/cmxc/cs/localhost-orcl-DS_UI1/task/urn:b4p2:15934
{
  processId: "3719",
  priority: "HIGH",
  owner: "John"
}

```

## Sample API Response

The API returns a 200 OK response code on successfully updating a task. The response body is empty.

## Task Complete

The Task Complete REST API closes a task workflow after you complete all the tasks in the workflow. Use the API to close a workflow after you process all the task related records. For example, when you select merge candidates, you can create a task that initiates the merge workflow. The merge task is complete after you preview each candidate and either merge it or mark it as not a match. Use the API to close the merge workflow.

The API uses the PUT method.

### Request URL

The Task Complete URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/task/<taskId>?action=complete
```

Make the following HTTP PUT request to the Task Complete URL:

```
PUT http://<host>:<port>/<context>/<database ID>/task/<taskId>?action=complete
```

Add the Content-Type header to specify the media type of the data you want to send with the request:

```
PUT http://<host>:<port>/<context>/<database ID>/task/<taskId>?action=complete
Content-Type: application/<json/xml>
```

### Request Body

Send the task details in the request body. Use the Read Task API to get the details of the task.

The following table describes the task parameters in the request body:

Parameter	Description
taskType	A set of actions that you can perform on a record. Use the name attribute to specify the task type. For more information about task types, see the <i>Multidomain MDM Data Director Implementation Guide</i> .
taskId	ID of the task.
owner	User who performs the task.
title	Short description for the task.
comments	Comments for the task.
dueDate	Date when the owner must complete the task.
status	Status of the task in the workflow. Use one of the following two values: - Open: Task has not started or is in progress. - Closed: Task is completed or is cancelled.
priority	Level of importance of the task.
creator	User who creates the task.
createDate	Date when the task was created.
updatedBy	User who updates the task.



Parameter	Description
lastUpdateDate	Date when the task was last updated.
orsId	ID of the ORS as registered in the Databases tool in the Hub Console.
processId	ID of the workflow process that contains the task.
taskRecord	The root record or the cross-reference record associated with the task. Use the row ID or the source system and source key to specify the record.
businessEntity name	Name of the business entity to which the taskRecord belongs.

The following sample code uses the rowId to specify the taskRecord:

```
taskRecord: [{
  businessEntity: {
    name: 'Person',
    key: {
      rowid: '233',
      systemName: '',
      sourceKey: ''
    }
  }
}]
```

## RELATED TOPICS:

- [“Formats for Dates and Time in UTC” on page 30](#)

## Sample API Request

The following sample request completes the merge workflow:

```
PUT http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/task/urn:b4p2:20210?
action=complete

{
  "taskType": {"name": "Merge"},
  "taskId": "urn:b4p2:20210",
  "owner": "admin",
  "dueDate": "2015-08-14T17:00:00-07:00",
  "status": "OPEN",
  "priority": "NORMAL",
  "creator": "admin",
  "createDate": "2015-06-15T00:00:00",
  "updatedBy": "admin",
  "lastUpdateDate": "2015-06-15T00:00:00",
  "businessEntity": "Person",
  "orsId": "localhost-orcl-DS_UI1",
  "processId": "20208",
  "taskRecord": [{
    "businessEntity": {
      "name": "Person",
      "key": {
        "rowid": "233",
        "systemName": "",
        "sourceKey": ""
      }
    }
  ]
}
```

## Sample API Response

The API returns a 200 OK response on successfully completing a task workflow. The response body is empty.

## Execute Task Action

The Execute Task Action REST API sets a task back to the workflow for further processing. Each task type has a set of task actions and a workflow that specifies the sequence of tasks. When you execute a task action, the task moves to the next step in the workflow. If a task action does not have a subsequent task, the workflow terminates when you execute the task action.

The API uses the POST method to perform actions, such as approve, escalate, or cancel a task.

### Request URL

The following URL specifies the format of the Execute Task Action URL:

```
http://<host>:<port>/<context>/<database ID>/task/<taskId>?action=<taskAction>
```

**Note:** Use the List Tasks API to get the ID of the task.

Make the following HTTP POST request to the Execute Task Action URL:

```
POST http://<host>:<port>/<context>/<database ID>/task/<taskId>?action=<taskAction>
```

If you want to edit the task before executing the task action, add the Content-Type header to specify the media type of the request data:

```
POST http://<host>:<port>/<context>/<database ID>/task/<taskId>?action=<taskAction>  
Content-Type: application/<json/xml>
```

### Request Body

Provide the task data in the request body if you want to change the task details before you execute the task action.

The following table describes the parameters in the request body:

Parameter	Description
taskType	A set of actions that you can perform on a record. Use the name attribute to specify the task type. For more information about task types, see the <i>Multidomain MDM Data Director Implementation Guide</i> .
taskId	ID of the task.
owner	User who performs the task.
title	Short description for the task.
comments	Comments for the task.
attachments	Attachments for the task.
dueDate	Date when the owner must complete the task.
status	Status of the task in the workflow. Use one of the following two values: <ul style="list-style-type: none"><li>- Open: Task has not started or is in progress.</li><li>- Closed: Task is completed or is cancelled.</li></ul>

Parameter	Description
priority	Level of importance of the task. Use one of the following values: high, normal, and low.
creator	User who creates the task.
createDate	Date when the task was created.
updatedBy	User who updates the task.
lastUpdateDate	Date when the task was last updated.
businessEntity	Name of the business entity.
orsId	ID of the ORS as registered in the Databases tool in the Hub Console.
processId	ID of the workflow process that contains the task.
taskRecord	The root record or the cross-reference record associated with the task. Use the row ID or the source system and source key to specify the record.
businessEntity name	Name of the business entity to which the taskRecord belongs.

The following sample code uses the rowId to specify the taskRecord:

```

taskRecord: [{
  businessEntity: {
    name: 'Person',
    key: {
      rowid: '233',
      systemName: '',
      sourceKey: ''
    }
  }
}]

```

## RELATED TOPICS:

- [“Formats for Dates and Time in UTC” on page 30](#)

## Sample API Request

The following sample request cancels a task and ends the workflow:

```

POST http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/task/urn:b4p2:15934?
taskAction=Cancel

{
  taskType: {
    name: "UpdateWithApprovalWorkflow",
    taskAction: [{name: "Cancel"}]
  },
  taskId: "urn:b4p2:15934",
  owner: "manager",
  title: "Smoke test task 222",
  comments: "Smoke testing",
  attachments: [
    {
      id: "TEMP_SVR1.1VDVS"
    }
  ],
  dueDate: "2015-06-15T00:00:00",
}

```

```

status: "OPEN",
priority: "NORMAL",
creator: "admin",
createDate: "2015-06-15T00:00:00",
updatedBy: "admin",
lastUpdateDate: "2015-06-15T00:00:00",
businessEntity: "Person",
orsId: "localhost-orcl-DS_UI1",
processId: '3685',
taskRecord: [{
  businessEntity:{
    name: 'Person',
    key:{
      rowid: '123',
      systemName: '',
      sourceKey: ''
    }
  }
}]
}

```

## Sample API Response

The API returns a 200 OK response code on successfully executing a task action. The response body is empty.

## List Assignable Users

The List Assignable Users REST API returns a list of users to whom you can assign the tasks that belong to a task type. Use the API to get the target users for a task.

The API uses the GET method.

### Request URL

The List Assignable Users URL has the following format:

```

http://<host>:<port>/<context>/<database ID>/user?taskType=<task
type>&businessEntity=<business entity name>

```

Make the following HTTP GET request to the List Assignable Users URL:

```

GET http://<host>:<port>/<context>/<database ID>/user?taskType=<task
type>&businessEntity=<business entity name>

```

### Query Parameters

The following table lists the required parameters in the URL:

Parameter	Description
taskType	A set of actions that you can perform on a record. The task types include update with approval, update with optional approval, merge, unmerge, review no approval, final review, and update rejected record.
businessEntity	Name of the business entity.

## Sample API Request

The following sample request retrieves a list of assignable users:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/user.json?
taskType=ReviewNoApprove&businessEntity=Person
```

## Sample API Response

The following sample response shows the list of assignable users for the task type ReviewNoApprove:

```
{
  "users": {
    "user": [
      {
        "userName": "admin"
      }
    ]
  },
  "roles": {}
}
```

## Bulk Claim Tasks

The Bulk Claim Task REST API claims multiple tasks. Use the API to claim tasks for which you are a potential owner.

The API uses the POST method.

**Note:** You can specify a maximum of 100 tasks in a request.

### Request URL

The Bulk Claim Tasks URL has the following format:

```
http://<host>:<port>/<context>/<database ID>
```

Make the following HTTP POST request to the Bulk Claim Tasks URL:

```
POST http://<host>:<port>/<context>/<database ID>
```

### Request Body

Specify the tasks that you want to claim in the request body.

The following table describes the parameters in the request body:

Parameter	Description
taskId	ID of the task.
opType	Operation that you want to perform on the tasks. Specify <code>Claim</code> to claim the tasks.

## Sample API Request

The following sample request claims multiple tasks:

```
POST http://localhost:8080/cmx/task/operations/mdmdb3-MDM_SAMPLE
{
  "tasks":
  [
    {

```

```

        "taskId": "urn:b4p2:2315"
      },
      {
        "taskId": "urn:b4p2:2312"
      },
      {
        "taskId": "urn:b4p2:2309"
      },
      {
        "taskId": "urn:b4p2:2306"
      },
      {
        "taskId": "urn:b4p2:2303"
      }
    ],
    "opType": "Claim"
  }
}

```

## Sample API Response

The following sample response shows a list of tasks that were successfully claimed:

```

{
  "tasks":
  [
    {
      "taskId": "urn:b4p2:2315",
      "status": "Completed"
    },
    {
      "taskId": "urn:b4p2:2312",
      "status": "Completed"
    },
    {
      "taskId": "urn:b4p2:2309",
      "status": "Completed"
    },
    {
      "taskId": "urn:b4p2:2306",
      "status": "Completed"
    },
    {
      "taskId": "urn:b4p2:2303",
      "status": "Completed"
    }
  ]
}

```

## Bulk Release Tasks

The Bulk Release Tasks REST API releases multiple tasks back to the pool of unassigned tasks.

The API uses the POST method.

**Note:** You can specify a maximum of 100 tasks in a request.

### Request URL

The Bulk Release Tasks URL has the following format:

```
http://<host>:<port>/<context>/<database ID>
```

Make the following HTTP POST request to the Bulk Release Tasks URL:

```
POST http://<host>:<port>/<context>/<database ID>
```

## Request Body

Specify the tasks that you want to release back to the pool in the request body.

The following table describes the parameters in the request body:

Parameter	Description
taskId	ID of the task.
comments	Optional. Comments for the tasks.
opType	Operation that you want to perform on the tasks. Specify <code>Release</code> to release the tasks back to the pool of available tasks.

## Sample API Request

The following sample request releases multiple tasks and adds the same comment to each task:

```
POST http://localhost:8080/cmz/task/operations/mdmdb3-MDM_SAMPLE
{
  "tasks":
  [
    {
      "taskId": "urn:b4p2:2318"
    },
    {
      "taskId": "urn:b4p2:2209"
    }
  ],
  "comments": "John is on vacation. Releasing these tasks back to the pool of
available tasks.",
  "opType": "Release"
}
```

The following sample request releases multiple tasks and adds a different comment to each task:

```
POST http://localhost:8080/cmz/task/operations/mdmdb3-MDM_SAMPLE
{
  "tasks":
  [
    {
      "taskId": "urn:b4p2:2318",
      "comments": "Jane is on vacation."
    },
    {
      "taskId": "urn:b4p2:2209",
      "comments": "Joe is on vacation."
    }
  ],
  "opType": "Release"
}
```

## Sample API Response

The following sample response shows a list of tasks that were successfully released:

```
{
  "tasks":
  [
    {
      "taskId": "urn:b4p2:2318",
      "status": "Completed"
    },
    {
      "taskId": "urn:b4p2:2209",

```

```

    "status": "Completed"
  }
]
}

```

## Bulk Assign Tasks

The Bulk Assign Tasks REST API allows you to assign or reassign tasks to users. Use the API to assign or reassign tasks to any user that is a potential owner of the task.

To determine the potential owners for tasks, use the List Potential Owners for Tasks AP. For more information, see [“List Potential Owners for Tasks” on page 103](#).

The API uses the POST method.

**Note:** You can specify a maximum of 100 tasks in a request.

### Request URL

The Bulk Assign Tasks URL has the following format:

```
http://<host>:<port>/<context>/<database ID>
```

Make the following HTTP POST request to the Bulk Assign Tasks URL:

```
POST http://<host>:<port>/<context>/<database ID>
```

### Request Body

Specify the tasks and the users that you want to assign to the tasks in the request body.

The following table describes the parameters in the request body:

Parameter	Description
taskId	ID of the task.
comments	Optional. Comments for the tasks.
assignTo	User responsible for the task. <b>Note:</b> You can only assign tasks to users who are potential owners for the task. To determine the potential owners for tasks, use the List Potential Owners for Tasks AP. For more information, see <a href="#">“List Potential Owners for Tasks” on page 103</a> .
opType	Operation that you want to perform on the tasks. Specify <i>Assign</i> to assign the tasks.

### Sample API Request

The following sample request assigns a user to multiple tasks and adds the same comment to each task:

```

POST http://localhost:8080/cmx/task/operations/mdmdb3-MDM_SAMPLE
{
  "tasks":
  [
    {
      "taskId": "urn:b4p2:5351"
    },
    {
      "taskId": "urn:b4p2:5352"
    }
  ],
}

```



```

    "assignTo": "srmngr1",
    "comments": "Please take a look at these tasks instead.",
    "opType": "Assign"
  }

```

The following sample request assigns the tasks to different users and adds a different comment to each task:

```

POST http://localhost:8080/cmx/task/operations/mdmdb3-MDM_SAMPLE
{
  "tasks":
  [
    {
      "taskId": "urn:b4p2:5351",
      "assignTo": "srmngr1",
      "comments": "Please help John take a look at this task."
    },
    {
      "taskId": "urn:b4p2:5352",
      "assignTo": "srmngr2",
      "comments": "Please help Jane take a look at this task."
    }
  ],
  "opType": "Assign"
}

```

## Sample API Response

The following sample response shows a list of tasks that were successfully assigned:

```

{
  "tasks":
  [
    {
      "taskId": "urn:b4p2:5351",
      "status": "Completed"
    },
    {
      "taskId": "urn:b4p2:5352",
      "status": "Completed"
    }
  ]
}

```

## Bulk Edit Tasks

The Bulk Edit Tasks REST API allows you to edit the task details of multiple tasks.

The API uses the POST method to update some task fields.

**Note:** You can specify a maximum of 100 tasks in a request.

### Request URL

The Bulk Edit Tasks URL has the following format:

```
http://<host>:<port>/<context>/<database ID>
```

Make the following HTTP POST request to the Bulk Edit Tasks URL:

```
POST http://<host>:<port>/<context>/<database ID>
```

## Request Body

Specify the tasks that you want to edit and provide the task data in the request body.

The following table describes the parameters in the request body:

Parameter	Description
taskId	ID of the task.
dueDate	Optional. Date when the owner must complete the task.
comments	Optional. Comments for the task.
title	Optional. Short description for the task.
priority	Optional. Level of importance of the task. Use one of the following values: high, normal, and low.
assignTo	Optional. User responsible for the task.
fileId	Optional. The ID of the file that you want to attach to the task. To attach a file to a task, you must upload the file to a temporary storage. For more information, see <a href="#">Appendix B, "Using REST APIs to Upload Files" on page 289</a> .
opType	Operation that you want to perform on the tasks. Specify <code>Edit</code> to edit the tasks.

## Sample API Request

The following sample request edits multiple tasks by using the same task details:

```
POST http://localhost:8080/cmx/task/operations/mdmdb3-MDM_SAMPLE
{
  "tasks":
  [
    {
      "taskId": "urn:b4p2:4383"
    },
    {
      "taskId": "urn:b4p2:4384"
    }
  ],
  "comments": "Please work on this task ASAP. There's more information in the
attachment.",
  "priority": "High",
  "title": "Test Demo Review Person",
  "dueDate": "2019-05-01 00:00:00",
  "fileId": "TEMP_SVR1.1IOPK",
  "opType": "Edit"
}
```

The following sample request edits multiple tasks by using different task details:

```
POST http://localhost:8080/cmx/task/operations/mdmdb3-MDM_SAMPLE
{
  "tasks":
  [
    {
      "taskId": "urn:b4p2:4383",
      "comments": "Added a screenshot to help clarify.",
      "priority": "High",
      "title": "Test Demo Review Person",
      "dueDate": "2019-05-01 00:00:00",
      "fileId": "TEMP_SVR1.1IOPK"
    }
  ],
}
```

```

    {
      "taskId": "urn:b4p2:4384",
      "priority": "High"
    }
  ],
  "opType": "Edit"
}

```

## Sample API Response

The following sample response shows a list of tasks that were successfully edited:

```

{
  "tasks":
  [
    {
      "taskId": "urn:b4p2:4383",
      "status": "Completed"
    },
    {
      "taskId": "urn:b4p2:4384",
      "status": "Completed"
    }
  ]
}

```

## Bulk Task Action

The Bulk Task Action REST API executes task actions on multiple tasks. When you execute a task action, the task moves to the next step in the workflow. If a task action does not have a subsequent task, the workflow ends when you execute the task action.

The API uses the POST method to perform actions, such as approve, escalate, or reject a task.

To determine the task actions that you can perform on a task, use the Get Task Actions API. For more information, see ["Get Task Actions" on page 101](#).

**Note:** You can specify a maximum of 100 tasks in a request.

## Request URL

The Bulk Task Action URL has the following format:

```
http://<host>:<port>/<context>/<database ID>
```

Make the following HTTP POST request to the Bulk Task Action URL:

```
POST http://<host>:<port>/<context>/<database ID>
```

## Request Body

Specify the tasks that you want to execute a task action on and the actions you want to execute.

The following table describes the parameters in the request body:

Parameter	Description
taskId	ID of the task.
actionName	Task action that you want to execute. Use the Get Task Actions API to determine the task actions that you can perform on the tasks.
opType	Operation that you want to perform on the tasks. Specify <i>Action</i> to execute a task action.

## Sample API Request

The following sample request approves tasks:

```
POST http://localhost:8080/cmz/task/operations/mdmdb3-MDM_SAMPLE
{
  "tasks":
  [
    {
      "taskId": "urn:b4p2:5351"
    },
    {
      "taskId": "urn:b4p2:5352"
    }
  ],
  "actionName": "Approve",
  "opType": "Action"
}
```

The following sample request approves one task and escalates one task:

```
POST http://localhost:8080/cmz/task/operations/mdmdb3-MDM_SAMPLE
{
  "tasks":
  [
    {
      "actionName": "Approve",
      "taskId": "urn:b4p2:5353"
    },
    {
      "actionName": "Escalate",
      "taskId": "urn:b4p2:5354"
    }
  ],
  "opType": "Action"
}
```

## Sample API Response

The following sample response shows a list of tasks that were successfully edited:

```
{
  "tasks":
  [
    {
      "taskId": "urn:b4p2:5351",
      "status": "Completed"
    },
    {
      "taskId": "urn:b4p2:5352",
```

```

    "status": "Completed"
  }
]
}

```

## Get Task Actions

The Get Task Actions REST API retrieves a list of task actions that you can perform on tasks.

The API uses the POST method to retrieve a list of task actions.

**Note:** You can specify a maximum of 100 tasks in a request.

### Request URL

The Get Task Actions URL has the following format:

```
http://<host>:<port>/<context>/<database ID>
```

Make the following HTTP POST request to the Get Task Actions URL:

```
POST http://<host>:<port>/<context>/<database ID>
```

### Request Body

Specify the tasks for which you want to know the task actions that you can perform.

The following table describes the parameters in the request body:

Parameter	Description
taskId	ID of the task.
opType	Operation that you want to perform on the tasks. Specify <code>GetTaskActions</code> to retrieve a list of task actions that you can perform on the task.

### Sample API Request

The following sample request retrieves the task actions you can perform on the tasks:

```

POST http://localhost:8080/cmx/task/operations/mdmdb3-MDM_SAMPLE
{
  "tasks":
  [
    {
      "taskId": "urn:b4p2:5351"
    },
    {
      "taskId": "urn:b4p2:5352"
    }
  ],
  "opType": "GetTaskActions"
}

```

### Sample API Response

The following sample response shows a list of tasks and the task actions that you can perform on each task:

```

{
  "tasks":
  [
    {

```

```

"taskId": "urn:b4p2:5351",
"status": "Completed",
"taskActions":
[
  {
    "name": "Approve",
    "displayName": "Approve",
    "description": null,
    "manualReassign": false,
    "closeTaskView": true,
    "cancelTask": false,
    "nextTaskType": "AVOSBeNotification"
  },
  {
    "name": "Reject",
    "displayName": "Reject",
    "description": null,
    "manualReassign": false,
    "closeTaskView": true,
    "cancelTask": false,
    "nextTaskType": "AVOSBeUpdate"
  },
  {
    "name": "Disclaim",
    "displayName": "Disclaim",
    "description": null,
    "manualReassign": true,
    "closeTaskView": true,
    "cancelTask": false,
    "nextTaskType": "AVOSBeFinalReview"
  }
]
},
{
"taskId": "urn:b4p2:5352",
"status": "Completed",
"taskActions":
[
  {
    "name": "Approve",
    "displayName": "Approve",
    "description": null,
    "manualReassign": false,
    "closeTaskView": true,
    "cancelTask": false,
    "nextTaskType": "AVOSBeNotification"
  },
  {
    "name": "Reject",
    "displayName": "Reject",
    "description": null,
    "manualReassign": false,
    "closeTaskView": true,
    "cancelTask": false,
    "nextTaskType": "AVOSBeUpdate"
  },
  {
    "name": "Disclaim",
    "displayName": "Disclaim",
    "description": null,
    "manualReassign": true,
    "closeTaskView": true,
    "cancelTask": false,
    "nextTaskType": "AVOSBeFinalReview"
  }
]
}
]
}

```

## List Potential Owners for Tasks

The List Potential Owners for Tasks REST API retrieves the potential owners for multiple tasks.

The API uses the GET method.

**Note:** You can specify a maximum of 100 tasks in a request.

### Request URL

The List Potential Task Owners for Tasks URL has the following format:

```
http://<host>:<port>/<context>/<database ID>
```

Make the following HTTP GET request to the List Potential Task Owners for Tasks URL:

```
GET http://<host>:<port>/<context>/<database ID>
```

### Request Body

Specify the tasks for which you want to retrieve the potential owners.

The following table describes the parameters in the request body:

Parameter	Description
taskId	ID of the task.
opType	Operation that you want to perform on the tasks. Specify <code>PotentialOwners</code> to get a list of potential owners for the tasks.

### Sample API Request

The following sample response retrieves the potential owners for multiple tasks:

```
GET http://localhost:8080/cmx/task/operations/mdmdb3-MDM_SAMPLE
{
  "tasks":
  [
    {
      "taskId": "urn:b4p2:4383"
    },
    {
      "taskId": "urn:b4p2:4382"
    }
  ],
  "opType": "PotentialOwners"
}
```

### Sample API Response

The following sample response shows the potential owners for each task:

```
{
  "tasks":
  [
    {
      "taskId": "urn:b4p2:4383",
      "status": "Completed",
      "users":
      [
        [
```

```

        "srmngr2",
        "srmngr 2"
    ],
    [
        "srmngr1",
        "senior manager"
    ]
]
},
{
    "taskId": "urn:b4p2:4382",
    "status": "Completed",
    "users":
    [
        [
            "srmngr2",
            "srmngr 2"
        ],
        [
            "srmngr1",
            "senior manager"
        ]
    ]
}
]
}

```

## List Potential Owners for a Task

The List Potential Owners for a Task REST API retrieves the potential owners for a task.

The API uses the GET method.

### Request URL

The List Potential Task Owners for a Task URL has the following format:

```
http://<host>:<port>/<context>/list/owners/<database ID>/<taskId>
```

Make the following HTTP GET request to the List Potential Task Owners for a Task URL:

```
GET http://<host>:<port>/<context>/list/owners/<database ID>
```

### Request Body

Specify the task for which you want to retrieve the potential owners.

The following table describes the parameters in the request body:

Parameter	Description
taskId	ID of the task.
opType	Operation that you want to perform on the task. Specify <code>PotentialOwners</code> to get a list of potential owners for the task.



## Sample API Request

The following sample request retrieves the potential owners for a task:

```
GET http://localhost:8080/cm/operation/list/owners/mdmdb3-MDM_SAMPLE
{
  "tasks":
  [
    {
      "taskId": "urn:b4p2:4383"
    },
    {
      "taskId": "urn:b4p2:4382"
    }
  ],
  "opType": "PotentialOwners"
}
```

## Sample API Response

The following sample response shows the potential owners for a task:

```
{
  "tasks":
  [
    {
      "taskId": "urn:b4p2:4383",
      "status": "Completed",
      "users":
      [
        [
          "srmngr2",
          "srmngr 2"
        ],
        [
          "srmngr1",
          "senior manager"
        ]
      ]
    },
    {
      "taskId": "urn:b4p2:4382",
      "status": "Completed",
      "users":
      [
        [
          "srmngr2",
          "srmngr 2"
        ],
        [
          "srmngr1",
          "senior manager"
        ]
      ]
    }
  ]
}
```

## List File Metadata

The List File Metadata REST API returns a list of file metadata in a storage.

Use the List File Metadata REST API with a BPM or TEMP storage.

The API uses the GET method.

## Request URL

The List File Metadata URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<storage>
```

Make the following HTTP GET request to the List File Metadata URL:

```
GET http://<host>:<port>/<context>/<database ID>/<storage>
```

## Sample API Request

The following sample request retrieves a list of file metadata in a TEMP storage:

```
GET http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/TEMP
```

## Sample API Response

The following sample response shows a list of file metadata:

```
{
  files: [
    {
      "fileId": "TEMP_SVR1.1VDVS",
      "fileName": "file1.txt",
      "fileType": "text",
      "fileContentType": "text/plain",
    },
    {
      "fileId": "TEMP_SVR1.2ESDS",
      "fileName": "image1.png",
      "fileType": "image",
      "fileContentType": "image/png",
    },
    ...
  ]
}
```

## Create File Metadata

The Create File Metadata REST API creates metadata for a file and returns a file ID for the file.

You can use the file ID to upload, attach, update, download, and delete the file.

Use the Create File Metadata REST API with a DB or TEMP storage.

The API uses the POST method.

## Request URL

The Create File Metadata URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<storage>
```

Make the following HTTP POST request to the Create File Metadata URL:

```
POST http://<host>:<port>/<context>/<database ID>/<storage>
```

## Request Body

Specify the metadata for the file.

The following table describes the parameters for the file metadata in the request body:

Parameter	Description
fileName	Name of the file. For example, <code>file.txt</code> .
fileType	Category of the file type. For example, <code>text</code> or <code>image</code> .
fileContentType	Content type of the file. The content type consists of a type and a subtype that are separated by a <code>/</code> . For example, <code>image/png</code> .

**Note:** The parameters required for the Create File Metadata REST API request are storage-specific.

## Sample API Request

The following sample request creates metadata for a file in a TEMP storage:

```
POST http://localhost:8080/cmxf/file/localhost-orcl-MDM_SAMPLE/TEMP

{
  "fileName": "file1.txt",
  "fileType": "text",
  "fileContentType": "text/plain"
}
```

## Sample API Response

The following example shows the response on successfully creating metadata for a file in a TEMP storage. The API returns the file ID for the file.

```
TEMP_SVR1.1VDVS
```

**Note:** The format of the file ID is `<storage type>_<uniqueID>`.

## Get File Metadata

The Get File Metadata REST API returns the metadata for a file associated with a file ID.

Use the Get File Metadata REST API with a BPM, BUNDLE, DB, or TEMP storage.

The API uses the GET method.

## Request URL

The Get File Metadata URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<storage>/<fileId>
```

Make the following HTTP GET request to the Get File Metadata URL:

```
GET http://<host>:<port>/<context>/<database ID>/<storage>/<fileId>
```

## Sample API Request

The following sample request returns the metadata for a file with the file ID, `TEMP_SVR1.1VDVS`, in the TEMP storage:

```
GET http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/TEMP/TEMP_SVR1.1VDVS
```

The following sample request returns the metadata for the resource bundle file with the file ID, `besMetadata`, in the BUNDLE storage:

```
GET http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/BUNDLE/besMetadata
```

## Sample API Response

The following sample response shows the metadata for a file with the file ID, `TEMP_SVR1.1VDVS`, in a TEMP storage:

```
{
  "fileName": "file1.txt",
  "fileType": "text",
  "fileContentType": "text/plain"
}
```

The following sample response shows the metadata for the resource bundle file, `besMetadata`, in a BUNDLE storage:

```
{
  "fileName": "besMetadata.zip",
  "fileType": "BES Metadata Bundle",
  "fileContentType": "application/zip",
  "digest": "a08c5d97da7e6a780ed7c427ff14a8d2d396438cd65b654ad67424e226f64a41"
}
```

## Update File Metadata

The Update File Metadata REST API updates the metadata for a file associated with a file ID.

Use the Update File Metadata REST API with a DB or TEMP storage.

The API uses the PUT method.

### Request URL

The Update File Metadata URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<storage>/<fileId>
```

Make the following HTTP PUT request to the Update File Metadata URL:

```
PUT
http://<host>:<port>/<context>/<database ID>/<storage>/<fileId>
```

## Sample API Request

The following sample request updates the metadata for a file with the file ID, `TEMP_SVR1.1VDVS`, in a TEMP storage:

```
PUT http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/TEMP/TEMP_SVR1.1VDVS

{
  "fileName": "file2.txt",
  "fileType": "text",
  "fileContentType": "text/plain"
}
```

The following sample request updates the metadata for a file with the file ID, `DB_SVR1.OJU1`, in a DB storage:

```
PUT http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/DB/DB_SVR1.OJU1
{
  "fileName": "Document_2.pdf",
  "fileType": "pdf",
  "fileContentType": "application/pdf"
}
```

## Sample API Response

The API returns a 200 OK response code on successfully updating the file metadata. The response body is empty.

## Upload File Content

The Upload File Content REST API uploads the content for a file associated to a file ID.

Use the Upload File Content REST API with a BUNDLE, DB, or TEMP storage.

The API uses the PUT method.

### Request URL

The Upload File Content URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<storage>/<fileId>/content
```

Make the following HTTP PUT request to the Upload File Content URL:

```
PUT http://<host>:<port>/<context>/<database ID>/<storage>/<fileId>/content
```

### Sample API Request

The following sample request uploads the content for a file with the file ID, `TEMP_SVR1.1VDVS`, in a TEMP storage:

```
PUT http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/TEMP/TEMP_SVR1.1VDVS/content
Test attachment content: file 1
```

The following sample request uploads the content for a file with the file ID, `DB_SVR1.OJU1`, in a DB storage:

```
PUT http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/DB/DB_SVR1.OJU1/content
Content-Type: application/octet-stream
<file object (upload using REST client)>
```

The following sample request uploads the content for a resource bundle file with the file ID, `besMetadata`, in a BUNDLE storage:

```
PUT http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/BUNDLE/besMetadata/content
Content-Type: application/octet-stream
Body: binary stream - zip file with besMetadata bundle
```

### Sample API Response

The API returns a 200 OK response code on successfully uploading the content for a file. The response body is empty.

## Get File Content

The Get File Content REST API returns the content for a file associated with a file ID.

Use the Get File Content REST API with a BPM, BUNDLE, DB, or TEMP storage.

The API uses the GET method.

### Request URL

The Get File Content URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<storage>/<fileId>/content
```

Make the following HTTP GET request to the Get File Content URL:

```
GET http://<host>:<port>/<context>/<database ID>/<storage>/<fileId>/content
```

### Sample API Request

The following sample request returns the content for a file with the file ID, `urn:b4p2:22203::file1.txt`, in a BPM storage:

```
GET http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/BPM/urn:b4p2:22203::file1.txt/content
```

**Note:** Use the Read Task REST API to retrieve the file ID of a task attachment in a BPM storage.

The following sample request returns the content for a file with the file ID, `DB_SVR1.OJU1`, in a DB storage:

```
GET http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/DB/DB_SVR1.OJU1/content
```

**Note:** Use the Read Record REST API to retrieve the file ID of the file that you attach to a record.

The following sample request returns the content for the resource bundle file with the file ID, `besMetadata`, in a BUNDLE storage:

```
GET http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/BUNDLE/besMetadata/content
```

### Sample API Response

The following sample response shows the content for a TXT file in a BPM storage:

```
Test attachment content: file 1
```

The following sample response shows the content for the resource bundle file in a BUNDLE storage:

```
Content-Disposition → attachment; filename=besMetadata.zip  
Content-Type → application/octet-stream  
Transfer-Encoding → chunked
```

## Delete File

The Delete File REST API deletes the file associated with a file ID, which includes the file metadata and content.

Use the Delete File REST API with a BUNDLE, DB, or TEMP storage.

The API uses the DELETE method.

### Request URL

The Delete File URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<storage>/<fileId>
```

Make the following HTTP DELETE request to the Delete File URL:

```
DELETE http://<host>:<port>/<context>/<database ID>/<storage>/<fileId>
```

## Sample API Request

The following sample request deletes the file associated with the file ID, `TEMP_SVR1.1VDVS`, in a TEMP storage, including the file metadata and content:

```
DELETE http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/TEMP/TEMP_SVR1.1VDVS
```

The following sample request deletes the file associated with the file ID, `DB_SVR1.OJU1`, in a DB storage, including the file metadata and content:

```
DELETE http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/DB/DB_SVR1.OJU1
```

The following sample request deletes the resource bundle file with the file ID, `besMetadata`, in a BUNDLE storage, including the file metadata and content:

```
DELETE http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/BUNDLE/besMetadata
```

## Sample API Response

The API returns a 200 OK response code on successfully deleting a file. The response body is empty.

## Preview Replaced Records

The Preview Replaced Records REST API returns business entity records that are edited and replaced with new values.

The API uses the POST method.

## Request URL

The Preview Replaced Records URL has the following format:

```
http://<host>:<port>/find-replace/<orsId>/<entity>/<preview{?
firstRecord,order,recordsToReturn,returnTotal}>
```

Make the following HTTP POST request to the Preview Replaced Records URL:

```
POST http://<host>:<port>/find-replace/<orsId>/<entity>/<preview{?
firstRecord,order,recordsToReturn,returnTotal}>
```

## Parameters

Specify the parameters to return business entity records that are edited and replaced with new values.

The following table describes the parameters in the request body.

Parameter	Type	Description
entity	Path	The name of the business entity records to return.
orsId	Path	Operational Reference Store ID of the database to return the replaced business entity records.
firstRecord	Query	Optional. The row of the records list.

Parameter	Type	Description
order	Query	Optional. Comma-separated list of field names with an optional prefix of + or -. The prefix + indicates to sort the results in ascending order, and the prefix - indicates to sort the results in descending order. Default is +. When you specify more than one parameter, the result set is ordered by the parameter that is first in the list, followed by the next.
recordsToReturn	Query	Optional. Specifies the number of rows to return.
returnTotal	Query	Optional. If set to <code>true</code> , returns the number of records in the result. Default is <code>false</code>

## Sample API Request

The following sample request returns business entity records that are edited and replaced with new values:

```
POST /cmx/find-replace/localhost-orcl-MDM_SAMPLE/Person/preview?returnTotal=true HTTP/1.1
Content-Type: application/json
Host: localhost:8080
Content-Length: 234

{
  "scope" : {
    "type" : "query",
    "filter" : "lastName='jones'"
  },
  "findReplace" : {
    "field" : "Emails.selectAddrTypeCd",
    "find" : null,
    "replacement" : {
      "electronicType" : "EMAIL"
    }
  }
}
```

## Sample API Response

The following sample response shows the replaced business entity records:

```
HTTP/1.1 200 OK
Server: JBoss-EAP/7
Date: Mon, 13 Jan 2020 18:07:02 GMT
X-Powered-By: Undertow/1
Content-Type: application/json;charset=UTF-8
Content-Length: 4891

{
  "link" : [ ],
  "firstRecord" : 1,
  "recordCount" : 6,
  "pageSize" : 10,
  "foundRecords" : 2,
  "item" : [ {
    "origin" : {
      "key" : {
        "rowid" : "401924"
      },
      "name" : "Person",
      "label" : "jones, alice",
      "object" : {
        "key" : {
          "rowid" : "426"
        }
      }
    }
  } ]
}
```



```

    },
    "name" : "Emails",
    "label" : "Emails"
  }
},
"found" : false,
"record" : {
  "rowidObject" : "426          ",
  "creator" : "admin",
  "createDate" : "2020-01-13T12:40:17.811-05:00",
  "updatedBy" : "admin",
  "lastUpdateDate" : "2020-01-13T12:40:18.583-05:00",
  "consolidationInd" : 4,
  "lastRowidSystem" : "SYS0          ",
  "hubStateInd" : 1,
  "label" : "Emails",
  "electronicAddress" : "alice@mail.com",
  "electAddrTypeCd" : {
    "electronicType" : "EMAIL"
  }
}
}, {
  "origin" : {
    "key" : {
      "rowid" : "401925          "
    },
    "name" : "Person",
    "label" : "jones, bob",
    "object" : {
      "key" : {
        "rowid" : "427          "
      },
      "name" : "Emails",
      "label" : "Emails"
    }
  },
  "found" : false,
  "record" : {
    "rowidObject" : "427          ",
    "creator" : "admin",
    "createDate" : "2020-01-13T12:40:18.006-05:00",
    "updatedBy" : "admin",
    "lastUpdateDate" : "2020-01-13T12:40:18.655-05:00",
    "consolidationInd" : 4,
    "lastRowidSystem" : "SYS0          ",
    "hubStateInd" : 1,
    "label" : "Emails",
    "electronicAddress" : "bob@mail.com",
    "electAddrTypeCd" : {
      "electronicType" : "EMAIL"
    }
  }
}, {
  "origin" : {
    "key" : {
      "rowid" : "401926          "
    },
    "name" : "Person",
    "label" : "jones, charlie",
    "object" : {
      "key" : {
        "rowid" : "428          "
      },
      "name" : "Emails",
      "label" : "Emails"
    }
  },
  "found" : false,
  "record" : {
    "rowidObject" : "428          ",
    "creator" : "admin",

```

```

        "createDate" : "2020-01-13T12:40:18.216-05:00",
        "updatedBy" : "admin",
        "lastUpdateDate" : "2020-01-13T12:40:18.216-05:00",
        "consolidationInd" : 4,
        "lastRowidSystem" : "SYS0          ",
        "hubStateInd" : 1,
        "label" : "Emails",
        "electronicAddress" : "charlie@mail.com",
        "electAddrTypeCd" : {
            "electronicType" : "EMAIL"
        }
    }
}, {
    "origin" : {
        "key" : {
            "rowid" : "401935          "
        },
        "name" : "Person",
        "label" : "jones, alice",
        "object" : {
            "key" : {
                "rowid" : "437          "
            },
            "name" : "Emails",
            "label" : "Emails"
        }
    },
    "found" : true,
    "record" : {
        "rowidObject" : "437          ",
        "creator" : "admin",
        "createDate" : "2020-01-13T13:07:02.187-05:00",
        "updatedBy" : "admin",
        "lastUpdateDate" : "2020-01-13T13:07:02.187-05:00",
        "consolidationInd" : 4,
        "lastRowidSystem" : "SYS0          ",
        "hubStateInd" : 1,
        "label" : "Emails",
        "electronicAddress" : "alice@mail.com"
    }
}, {
    "origin" : {
        "key" : {
            "rowid" : "401936          "
        },
        "name" : "Person",
        "label" : "jones, bob",
        "object" : {
            "key" : {
                "rowid" : "438          "
            },
            "name" : "Emails",
            "label" : "Emails"
        }
    },
    "found" : true,
    "record" : {
        "rowidObject" : "438          ",
        "creator" : "admin",
        "createDate" : "2020-01-13T13:07:02.389-05:00",
        "updatedBy" : "admin",
        "lastUpdateDate" : "2020-01-13T13:07:02.390-05:00",
        "consolidationInd" : 4,
        "lastRowidSystem" : "SYS0          ",
        "hubStateInd" : 1,
        "label" : "Emails",
        "electronicAddress" : "bob@mail.com"
    }
}, {
    "origin" : {
        "key" : {

```

```

        "rowid" : "401937"
    },
    "name" : "Person",
    "label" : "jones, charlie",
    "object" : {
        "key" : {
            "rowid" : "439"
        },
        "name" : "Emails",
        "label" : "Emails"
    }
},
"found" : false,
"record" : {
    "rowidObject" : "439",
    "creator" : "admin",
    "createDate" : "2020-01-13T13:07:02.587-05:00",
    "updatedBy" : "admin",
    "lastUpdateDate" : "2020-01-13T13:07:02.587-05:00",
    "consolidationInd" : 4,
    "lastRowidSystem" : "SYS0",
    "hubStateInd" : 1,
    "label" : "Emails",
    "electronicAddress" : "charlie@mail.com",
    "electAddrTypeCd" : {
        "electronicType" : "EMAIL"
    }
}
}
} ]
}

```

## Update Find and Replace

The Update Replaced Records REST API returns filtered records for the business entities you want to edit and replace with new values.

The API uses the POST method.

### Request URL

The Update Replaced Records URL has the following format:

```
http://<host>:<port>/find-replace/<orsId>/<entity>/{?systemName}
```

Make the following HTTP POST request to the Update Replaced Records URL:

```
POST http://<host>:<port>/find-replace/<orsId>/<entity>/{?systemName}
```

### Parameters

Specify the parameters to update filtered records for the business entities.

The following table describes the parameters:

Parameter	Type	Description
entity	Path	The name of the business entity records to return.
orsId	Path	Operational Reference Store ID of the database to return the replaced business entity records.

Parameter	Type	Description
systemName	Query	Optional. Name of the source system.
If-Unmodified-Since	Header	Optional. Enables to skip records that were previously replaced.

## Sample API Request

The following sample request updates filtered records for the business entities you want to edit and replace with new values:

```
POST /cmx/find-replace/localhost-orcl-MDM_SAMPLE/Person?systemName=Admin HTTP/1.1
Content-Type: application/json
Host: localhost:8080
Content-Length: 234

{
  "scope" : {
    "type" : "query",
    "filter" : "lastName='jones'"
  },
  "findReplace" : {
    "field" : "Emails.selectAddrTypeCd",
    "find" : null,
    "replacement" : {
      "electronicType" : "EMAIL"
    }
  }
}
```

## Sample API Response

The following sample response shows the updated filtered records for business entities:

```
HTTP/1.1 200 OK
Server: JBoss-EAP/7
X-Powered-By: Undertow/1
Content-Type: application/json;charset=UTF-8
Content-Length: 1339

{
  "successful" : 2,
  "failed" : 0,
  "skipped" : 0,
  "item" : [ {
    "object" : {
      "Person" : {
        "key" : {
          "rowid" : "401935"
        },
        "rowidObject" : "401935",
        "Emails" : {
          "link" : [ ],
          "item" : [ {
            "key" : {
              "rowid" : "437",
              "sourceKey" : "480000041000"
            },
            "rowidObject" : "437",
            "selectAddrTypeCd" : {
              "key" : {
                "rowid" : "1"
              },
              "rowidObject" : "1"
            }
          }
        ]
      }
    }
  }
]
```

```

    }
  } ]
}
},
"parameters" : { }
}, {
  "object" : {
    "Person" : {
      "key" : {
        "rowid" : "401936"
      },
      "rowidObject" : "401936",
      "Emails" : {
        "link" : [ ],
        "item" : [ {
          "key" : {
            "rowid" : "438",
            "sourceKey" : "480000043000"
          },
          "rowidObject" : "438",
          "electAddrTypeCd" : {
            "key" : {
              "rowid" : "1"
            },
            "rowidObject" : "1"
          }
        } ]
      }
    }
  } ]
}
},
"parameters" : { }
} ]
}

```

## Import New File

The Import New File REST API starts a new file import job and imports business entities from a file.

The API uses the POST method.

### Request URL

The Import New File URL has the following format:

```
http://<host>:<port>/<context>/<orsId>/<job>
```

Make the following HTTP POST request to the Import New File URL:

```
POST http://<host>:<port>/<context>/<orsId>/<job>
```

## Parameters

Specify the following parameters for a new file import in the request body.

The following table describes the parameters:

Parameter	Type	Description
orsID	Path	Operational Reference Store database ID to import the new file into.
fileID	Query	Optional. File ID of the imported file. Use this option if you are updating existing records.
mappingID	Query	Optional. Mapping ID of the imported file. Use this option if you are updating a previously imported file.
systemName	Query	Optional. Name of the system user who imports the file.

## Sample API Request

The following sample request starts a new file import job and imports business entities:

```
POST /cmx/beimport/localhost-orcl-MDM_SAMPLE/job HTTP/1.1
Content-Type: application/json
Host: localhost:8080
Content-Length: 94

{
  "fileId" : "TEMP_SVR1.1G7UW",
  "mappingId" : "SVR1.1G7UX",
  "systemName" : "Admin"
}
```

## Sample API Response

The following sample response shows the new file successfully imported:

```
HTTP/1.1 201 Created
Server: JBoss-EAP/7
X-Powered-By: Undertow/1
Location: http://localhost:8080/cmx/jobcontrol/localhost-orcl-MDM_SAMPLE/group/SVR1.1G7UY
```

## Import Matched File

The Import Matched File REST API matches new business entities with existing business entities before importing the file. After the import operation is completed, the matched business entities are updated with new data.

You can import duplicate business entities, unique business entities or duplicate and unique business entities.

The API uses the POST method.

## Request URL

The Import Matched File URL has the following format:

```
http://<host>:<port>/<context>/<orsId>/<aftermatch>
```

Make the following HTTP POST request to the Import Matched File URL:

```
POST http://<host>:<port>/<context>/<orsId>/<aftermatch>
```

## Parameters

Specify the parameters to match new business entities with existing business before importing the file.

The following table describes the parameters:

Parameter	Type	Description
orsId	Path	Operational Reference Store database ID to import the file after matching existing records.
filter	Query	Optional. Use the following filter values: withMatches: Enter <code>true</code> if the records match existing records. withoutMatches: Enter <code>false</code> if the records do not match existing records.
jobGroupControlId	Query	Optional. Match job group ID.
systemName	Query	Optional. Source system name.

## Sample API Request

The following sample request matches new business entities with existing business entities before importing the file:

```
POST /cmx/beimport/{ors}/aftermatch
{
  jobGroupControlId: "...",
  systemName: "SFA",
  filter: {
    withMatches: true,
    withoutMatches: false
  }
}
```

## Sample API Response

The API returns a 200 OK response code after successfully matching new business entities with existing business entities and importing the file. The response body is empty.

## Get File Properties

The Get File Properties REST API returns the file properties of the imported file. For example, The API returns delimiter, text qualifier and decimal separator file properties if you selected these properties when you import the file.

The API uses the GET method.

**Note:** The API returns existing file properties with delimiters only if there are five rows or more.

## Request URL

The Get File Properties URL has the following format:

```
http://<host>:<port>/<context>/<orsId>/<fileId>/<properties{query}>
```

Make the following HTTP GET request to the Get File Properties URL:

```
GET http://<host>:<port>/<context>/<orsId>/<fileId>/<properties{query}>
```

## Parameters

Specify the parameters to get the file properties of the imported file.

The following table describes the parameters:

Parameter	Type	Description
orsId	Path	Operational Reference Store database ID.
fileId	Path	File ID of the imported file.
suggest	Query	Optional. If set to true, the request returns the file properties based on the imported file. Else, the request returns suggested file properties based on the data in the imported file.

## Sample API Request

The following sample request detects and returns the file properties of the imported file:

```
GET /cmx/file/parser/localhost-orcl-MDM_SAMPLE/TEMP_SVR1.1G7UW/properties?suggest=true
HTTP/1.1
Content-Type: application/json
Host: localhost:8080
```

## Sample API Response

The following sample response shows the header and body after returning the file properties of the imported file:

```
HTTP/1.1 200 OK
Server: JBoss-EAP/7
X-Powered-By: Undertow/1
Content-Type: application/json;charset=UTF-8
Content-Length: 370
```

```
{
  "confidence" : "HIGH",
  "type" : "CSV",
  "properties" : {
    "headerRow" : 1,
    "dataStartsAtRow" : 2,
    "regionalSettings" : {
      "locale" : "en-CA",
      "datePattern" : "MM-dd-yyyy",
      "decimalSeparator" : ".",
      "thousandsSeparator" : ","
    },
    "delimiter" : ",",
    "encoding" : "UTF-8",
    "textQualifier" : "\""
  }
}
```

## Save File Properties

The Save File Properties REST API parses and saves the imported file properties.

The API uses the PUT method.



## Request URL

The Save File Properties URL has the following format:

```
http://<host>:<port>/<context>/<orsId>/<fileId>/<properties>
```

Make the following HTTP PUT request to the Save File Properties URL:

```
PUT http://<host>:<port>/<context>/<orsId>/<fileId>/<properties>
```

## Parameters

Specify the parameters to save the file properties of the imported file.

The following table describes the parameters in the request body:

Parameter	Type	Description
orsId	Path	Operational Reference Store database ID.
fileId	Path	File ID of the imported file.
headerRow	Query	Optional. Row header number you want a column.
dataStartAtRow	Query	Optional. Row of the source file you want to import data from.
locale	Query	Optional. Localization language.
dataPattern	Query	Optional. Date format for the date fields in the import file.
decimalSeparator	Query	Optional. Decimal separator. Enter a comma or a period.
thousandsSeparator	Query	Optional. Thousands separator. Enter a comma or a period.
delimiter	Query	Optional. Character that represents the break between data values in the import file. Enter a predefined delimiter or define a custom delimiter.
encoding	Query	Optional. Unicode encoding standard.
textQualifier	Query	Optional. Symbols used in the file to enclose a string.

## Sample API Request

The following sample request parses and saves the file properties:

```
PUT /cmx/file/parser/localhost-orcl-MDM_SAMPLE/TEMP_SVR1.1G7UW/properties HTTP/1.1
Content-Type: application/json
Host: localhost:8080
Content-Length: 344
```

```
{
  "type" : "CSV",
  "properties" : {
    "headerRow" : 1,
    "dataStartsAtRow" : 2,
    "regionalSettings" : {
      "locale" : "en-CA",
      "datePattern" : "MM-dd-yyyy",
      "decimalSeparator" : ".",
      "thousandsSeparator" : ","
    },
    "delimiter" : ",",
  }
}
```

```

    "encoding" : "UTF-8",
    "textQualifier" : "\"\"
  }
}

```

## Sample API Response

The following sample response shows the file properties are saved.

```

HTTP/1.1 200 OK
Server: JBoss-EAP/7
X-Powered-By: Undertow/1

```

## Return File Properties

The Return File Properties REST API returns the properties of files that are persisted.

The API uses the GET method.

### Request URL

The Return File Properties URL has the following format:

```
http://<host>:<port>/<context>/<orsId>/<fileId>/<properties>
```

Make the following HTTP GET request to the Return File Properties URL:

```
GET http://<host>:<port>/<context>/<orsId>/<fileId>/<properties>
```

### Parameters

Specify the parameters to return the properties of files that are persisted.

The following table describes the parameters:

Parameter	Type	Description
orsId	Path	Operational Reference Store ID to retrieve the file properties from.
fileId	Path	File ID of the imported file.
suggest	Query	Optional. If set to true, the request returns properties of files that are persisted. Else, the request returns all file properties.

### Sample API Request

The following sample request returns the properties of files that are persisted.

```

GET /cmx/file/parser/localhost-orcl-MDM_SAMPLE/TEMP_SVR1.1G7UW/properties?suggest=true
HTTP/1.1
Content-Type: application/json
Host: localhost:8080

```

### Sample API Response

The following sample response shows the properties of files that are persisted:

```

HTTP/1.1 200 OK
Server: JBoss-EAP/7

```

```
X-Powered-By: Undertow/1
Content-Type: application/json;charset=UTF-8
Content-Length: 370
```

```
{
  "confidence" : "HIGH",
  "type" : "CSV",
  "properties" : {
    "headerRow" : 1,
    "dataStartsAtRow" : 2,
    "regionalSettings" : {
      "locale" : "en-CA",
      "datePattern" : "MM-dd-yyyy",
      "decimalSeparator" : ".",
      "thousandsSeparator" : ",",
    },
    "delimiter" : ",",
    "encoding" : "UTF-8",
    "textQualifier" : "\""
  }
}
```

## Preview Parsed Files

The Preview Parsed Files REST API parses file properties and returns flat records based on the properties provided in the request body. The API parses CSV and Excel files.

The API uses the POST method.

### Request URL

The Preview Parsed Files API URL has the following format:

```
http://<host>:<port>/<context>/<orsId>/<fileId>/preview{?pageSize}
```

Make the following HTTP POST request to the Preview Parsed Files API URL:

```
POST http://<host>:<port>/<context>/<orsId>/<fileId>/preview{?pageSize}
```

### Parameters

Specify the parameters to parse file properties and returns flat records based on the properties provided in the request body.

The following table describes the parameters in the request body:

Parameter	Type	Description
orsId	Path	Operational Reference Store database ID of the file stored in the database.
fileId	Path	File ID of the imported file.
pagesize	Query	Optional. Number of record rows to return.

### Sample API Request

The following sample request parses file properties and returns flat records based on the properties provided in the request body:

```
POST /cmx/file/parser/localhost-orcl-MDM_SAMPLE/TEMP_SVR1.1G7UW/preview HTTP/1.1
Content-Type: application/json
```

```

Host: localhost:8080
Content-Length: 345

{
  "type" : "CSV",
  "properties" : {
    "headerRow" : 1,
    "dataStartsAtRow" : 2,
    "regionalSettings" : {
      "locale" : "en-CA",
      "datePattern" : "d MMM, YYYY",
      "decimalSeparator" : ".",
      "thousandsSeparator" : ","
    },
    "delimiter" : ",",
    "encoding" : "UTF-8",
    "textQualifier" : "\""
  }
}

```

## Sample API Response

The following sample response shows the flat records retrieved based on the properties provided in the request body:

```

HTTP/1.1 200 OK
Server: JBoss-EAP/7
X-Powered-By: Undertow/1
Content-Type: application/json;charset=UTF-8
Content-Length: 381

{
  "header" : [ "first_name", "last_name", "job_title", "gender", "birth_date" ],
  "data" : [ [ "alice", "smith", "developer", "F", "01-01-1950" ], [ "bob", "smith",
"tester", "M", "02-02-1960" ], [ "charlie", "smith", "manager", "X", "03-03-1970" ],
[ "dave", "smith", "accountant", "M", "ten years ago" ], [ "eve", "smith", "", "F",
"04-04-1990" ] ],
  "numberOfRows" : 5
}

```

## Get Parsed Files

The Get Parsed Files REST API parses file properties and returns flat records based on the properties. The API parses CSV and Excel files.

The API uses the GET method.

### Request URL

The Get Parsed File Properties URL has the following format:

```
http://<host>:<port>/<context>/<orsId>/<fileId>/preview{?pageSize}
```

Make the following HTTP GET request to the Get Parsed File Properties URL:

```
GET http://<host>:<port>/<context>/<orsId>/<fileId>/preview{?pageSize}
```

## Parameters

Specify the parameters to parse file properties and return flat records based on the file properties.

The following table describes the parameters:

Parameter	Type	Description
orsId	Path	Operational Reference Store database ID.
fileId	Path	File ID of the imported file.
pagesize	Query	Optional. Number of record rows to return.

## Sample API Request

The following sample request parses files and returns flat records based on the properties associated with a file:

```
GET /cmx/file/parser/localhost-orcl-MDM_SAMPLE/TEMP_SVR1.1G7UW/preview HTTP/1.1
Content-Type: application/json
Host: localhost:8080
```

## Sample API Response

The following sample response shows the flat records parsed based on the properties associated with a file:

```
HTTP/1.1 200 OK
Server: JBoss-EAP/7
X-Powered-By: Undertow/1
Content-Type: application/json;charset=UTF-8
Content-Length: 381

{
  "header" : [ "first_name", "last_name", "job_title", "gender", "birth_date" ],
  "data" : [ [ "alice", "smith", "developer", "F", "01-01-1950" ], [ "bob", "smith",
"tester", "M", "02-02-1960" ], [ "charlie", "smith", "manager", "X", "03-03-1970" ],
[ "dave", "smith", "accountant", "M", "ten years ago" ], [ "eve", "smith", "", "F",
"04-04-1990" ] ],
  "numberOfRows" : 5
}
```

## Import File Parsing Errors

The Import File Parsing Errors REST API returns parsing errors from the file import operation in a CSV file format.

The API uses the GET method.

### Request URL

The Import File Parsing Errors URL has the following format:

```
http://<host>:<port>/<context>/<orsId>/<parse-errors>/{jobGroupControlId}{?entity}
```

Make the following HTTP GET request to the Import File Parsing Errors URL:

```
GET http://<host>:<port>/<context>/<orsId>/<parse-errors>/{jobGroupControlId}{?entity}
```

## Parameters

Specify the parameters to return parsing errors from the file import operation in a CSV file.

The following table describes the parameters in the request body:

Parameter	Type	Description
orsId	Path	Operational Reference Store database ID to return parsing errors from the file import operation.
jobGroupControlId	Query	Optional. Batch job group ID.
entity	Query	Optional. Name of the business entity.

## Sample API Request

The following sample request returns parsing errors from the file import operation:

```
GET /cmx/beimport/localhost-orcl-MDM_SAMPLE/parse-errors/SVR1.1G7UY HTTP/1.1
Host: localhost:8080
```

## Sample API Response

The following sample response shows parsing errors from the file import operation:

```
HTTP/1.1 200 OK
Server: JBoss-EAP/7
X-Powered-By: Undertow/1
Content-Type: text/csv
Content-Length: 200

first_name,last_name,job_title,gender,birth_date,ROW,COLUMN,ERROR,ENTITY
dave,smith,accountant,M,ten years ago,3,birth_date,Failed to convert value [ten years ago] for field [birthdate].,PersonView
```

## Import File Loading Errors

The Import File Loading Errors REST API returns errors from the file import operation in a CSV file format.

The API uses the GET method.

### Request URL

The Import File Loading Errors URL has the following format:

```
http://<host>:<port>/<context>/<orsId>/<load-errors>/{jobGroupControlId}{?entity}
```

Make the following HTTP GET request to the Import File Loading Errors URL:

```
GET http://<host>:<port>/<context>/<orsId>/<load-errors>/{jobGroupControlId}{?entity}
```

## Parameters

Specify the parameters to return loading errors from the file import operation in a CSV file.

The following table describes the parameters in the request body .

Parameter	Type	Description
orsld	Path	Operational Reference Store database ID to return loading errors from the file import operation.
jobGroupControllId	Query	Optional. Batch job group ID.
entity	Query	Optional. Name of the business entity.

## Sample API Request

The following sample request returns loading errors from the file import operation:

```
GET /cmx/beimport/localhost-orcl-MDM_SAMPLE/load-errors/SVR1.1G7UY HTTP/1.1
Host: localhost:8080
```

## Sample API Response

The following sample response shows loading errors from the file import operation:

```
HTTP/1.1 200 OK
Server: JBoss-EAP/7
X-Powered-By: Undertow/1
Content-Type: text/csv
Content-Length: 257

first_name,last_name,job_title,gender,birth_date,ROW,COLUMN,ERROR,ENTITY
charlie,smith,manager,X,03-03-1970,2,,SIP-50112: Could not run WriteCO business entity
service. A record for [genderCd] could not be found in business entity
[LUGender].,PersonView
```

## Preview Promote

The Preview Promote REST API returns a preview of a resulting record if you promote the pending changes.

The API uses the GET method. You can see how a record would look if you apply the pending changes to the record. The API response contains the record with the new values and a change summary with the old values. The API does not return information about data that you delete. Provide the interaction ID of the pending changes in the URL.

## Request URL

The Preview Promote URL has the following format:

```
http://<host>:<port>/<context>/<database ID><business entity>/<rowId>?
action=previewPromote&interactionID=<interaction ID>
```

Make the following HTTP GET request to the Preview Promote URL:

```
GET http://<host>:<port>/<context>/<database ID><business entity>/<rowId>?
action=previewPromote&interactionID=<interaction ID>
```

## Query Parameters

The interaction ID of the pending changes is a required parameter in the URL.

The following table lists the query parameters:

Parameter	Description
contentMetadata	Metadata for the merge preview. Provide a comma-separated list. You can use the following values: <ul style="list-style-type: none"><li>- BVT. Specify the rowid of the record that contains the most trustworthy value to use in the merge preview. Returns information about the cross-reference record and the original record ID.</li><li>- MERGE. Specify the rowids of the records to merge. Returns information about how the descendant records were merged.</li></ul>
interactionId	Interaction ID of the pending changes.
effectiveDate	Optional. Date for which you want to preview the changes. Use the parameter for timeline-enabled base objects.

### RELATED TOPICS:

- [“Formats for Dates and Time in UTC” on page 30](#)

## Sample API Request

The following sample request creates a preview of a root record in the Person business entity:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/233?
action=previewPromote&interactionId=72300000001000
```

## Sample API Response

The following sample response returns a preview of the record with the new values and a change summary of old values:

```
{
  "rowidObject": "233",
  "creator": "admin",
  "createDate": "2008-08-12T02:15:02-07:00",
  "updatedBy": "admin",
  "lastUpdateDate": "2015-07-14T03:42:38.778-07:00",
  "consolidationInd": "1",
  "lastRowidSystem": "SYS0",
  "dirtyIndicator": "0",
  "interactionId": "72300000001000",
  "hubStateInd": "1",
  "label": "LLOYD,BOB",
  "partyType": "Person",
  "lastName": "LLOYD",
  "firstName": "BOB",
  "displayName": "BOB LLOYD",
  "preferredPhone": {
    "rowidObject": "164",
    "$original": {
      "rowidObject": "164"
    }
  },
  "$original": {
    "label": "DUNN,LLOYD",
    "lastName": "DUNN",
    "firstName": "LLOYD",
    "displayName": "LLOYD DUNN"
  }
}
```



```
}  
}
```

## Promote

The Promote REST API promotes all pending changes made to a record based on the interaction ID of the change request.

The API uses the POST method. Provide the interaction ID as a query parameter.

### Request URL

The Promote URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId of the root record>?action=promote&interactionId=<interaction ID>
```

Make the following HTTP POST request to the Promote URL:

```
POST http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId of the root record>?action=promote&interactionId=<interaction ID>
```

### Query Parameter

The interaction ID of the pending changes is a required parameter. The API uses the interaction ID to find all the records related to the pending changes.

### Sample API Request

The following sample request promotes all the pending changes based on the interaction ID of the change request:

```
POST http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/1038246?  
action=promote&interactionId=69120000294000
```

### Sample API Response

The following sample response contains the row ID of the record after promoting the pending changes:

```
{  
  Person: {  
    rowidObject: "1038246"  
  }  
}
```

## Delete Pending

The Delete Pending REST API deletes all pending changes you make to a record based on the interaction ID of the change request.

The API uses the DELETE method and returns the row ID of the record.

### Request URL

The Delete Pending URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowid>?  
action=deletePending&interactionId=<interaction ID>
```

Make the following DELETE request to the Delete Pending URL:

```
DELETE http://<host>:<port>/<context>/<database ID>/<business entity>/<rowid>?
action=deletePending&interactionId=<interaction ID>
```

## Query Parameter

Provide the interaction ID of the pending changes that you want to delete.

## Sample API Request

The following sample request deletes all the pending changes based on the interaction ID of the change request:

```
DELETE http://localhost:8080/cmxc/cs/localhost-orcl-DS_UI1/Person/233?
action=deletePending&interactionId=7230000001000
```

## Sample API Response

The following sample response contains the row ID of the record after deleting the pending changes:

```
{
  Person: {
    rowidObject: "233"
  }
}
```

## Preview Merge

The Preview Merge REST API returns a preview of a consolidated root record if you merge two or more root records.

The API uses the POST method and accepts a list of root records and field-level overrides to return a preview of the merged record. The row ID of the target record is a required parameter.

## Request URL

The Preview Merge URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowid of the record>?
action=previewMerge
```

The following Preview Merge URL format specifies the number of child levels to return:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowid of the record>?
action=previewMerge&depth=2
```

Make the following HTTP POST request to the Preview Merge URL:

```
POST http://<host>:<port>/<context>/<database ID>/<business entity>/<rowid of the
record>?action=previewMerge
```

**Note:** In the request body, add the keys property and specify the root records that you want to merge with the target record.

To override matches for the child records, add the contentMetadata parameter:

```
POST http://<host>:<port>/<context>/<database ID>/<business entity>/<rowid of the
record>?action=previewMerge&contentMetadata=MERGE/<json/xml>
```

**Note:** In the request body, add the overrides property and specify the merge overrides.

To specify the media type of the data you want to send with the request, add the Content-Type header:

```
POST http://<host>:<port>/<context>/<database ID>/<business entity>/<rowid of the
record>?action=previewMerge
Content-Type: application/<json/xml>
```

## Query Parameters

The row ID of the target record is a required parameter.

You can use the following query parameters:

Parameter	Description
contentMetadata	Metadata for the merge preview. Provide a comma-separated list. You can use the following values: - BVT. Returns information about the winning cross-reference record and the original record ID. - MERGE. Returns information about how the descendant records were merged.
depth	Number of child levels to return.
effectiveDate	Date for which you want to generate the preview.

## RELATED TOPICS:

- [“Formats for Dates and Time in UTC” on page 30](#)

## Request Body

Before you begin, use the Read Matched Records API to determine which matched records you can merge with the original root record. Send the list of records in the request body for the Preview Merge API.

You can override field values in the root record. For example, if none of the matched root records contain the correct spelling of the first name, you can specify the correct first name in the request body. Also, you can remove matched records or specify other matching records.

Use the following properties in the request body:

Properties / Elements	Type	Description
keys	array	Required. An ordered list of the matched root records that you want to merge. You can identify the records either by row ID or by a combination of the source system and the source key.
overrides	object	Overrides the field values in a root record and the matches for child records.
MERGE	object	Overrides the field values in child records that you want to merge. Add the type of child record within the <code>overrides</code> object and then add the <code>MERGE</code> object.

The following JSON code sample identifies a root record to merge with the target root record:

```
{
  keys: [
    {
      rowid: "P2"
    }
  ]
}
```

The following code shows how to override a field in the Party root record and how to override the merge candidates for Telephone child records:

```

{
  keys: [
    {
      rowid: "P2"
    }
  ]
  overrides: {
    Party: {
      rowidObject: "P1",
      firstName: "Serge", //override the value for the first name
      Telephone: { // override which Telephone child records to merge
        item:[
          {
            rowidObject: "T1",
            MERGE: {
              item: [ // to remove the original merge candidates, specify null
                null,
                null
              ],
              $original: {
                item: [
                  {key:{rowid: "T2"}},
                  {key:{rowid: "T3"}}
                ]
              }
            }
          },
          {
            rowidObject: "T4",
            MERGE: {
              item: [ // to add or change merge candidates, specify matched records
                {key:{rowid: "T2"}}
              ],
              $original: {
                item: [
                  null
                ]
              }
            }
          }
        ]
      }
    }
  }
}

```

## Sample API Request

The following sample request returns the preview of a consolidated record:

```

POST http://localhost:8080/cmxcs/localhost-orcl-DS_UI1/Person/2478245?
action=previewMerge

{
  keys: [
    {
      rowid: "2478246"
    },
    {
      rowid: "2478230"
    }
  ],
  overrides: {
    Person: {
      firstName: "Charlie"
    }
  }
}

```

## Sample API Response

The following sample response shows the preview of the consolidated record:

```
{
  "Person": {
    "rowidObject": "2478245",
    "partyType": "Person",
    "lastName": "Smith",
    "firstName": "Charlie",
    "displayName": "ALICE SMITH"
  }
}
```

## Update Pending Merge

To save changes to records that are part of a pending merge task, such as record value overrides, use the Update Pending Merge REST API. The API saves the changes based on the interaction ID of the records.

The API uses the POST method.

### Request URL

The path component of the request URL must include the row ID of the target record.

The Update Pending Merge URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>
/<rowid of the root record>?
action=updatePendingMerge&interactionId=<interaction ID>
```

Make the following HTTP POST request to the Update Pending Merge URL:

```
POST http://<host>:<port>/<context>/<database ID>/<business entity>
/<rowid of the root record>?
action=updatePendingMerge&interactionId=<interaction ID>
```

In the request body, add the keys and specify the root records that you want to merge with the target root record. You can also specify the child records for which you want to override matches.

### Query Parameter

The following table describes the query parameters that you can use in the URL:

Parameter	Description
action	Required. Saves changes, such as field-level overrides, to a pending merge task. Set to <code>updatePendingMerge</code> , and use the parameter with the <code>interactionId</code> parameter. For example, use the following query to save changes to the Person business entity records that are pending the merge action: <code>Person?action=updatePendingMerge&amp;interactionId</code>
interactionId	Required. Interaction ID of the pending merge task.

## Request Body

Before you use the Update Pending Merge API, use the Read Matched Records REST API to determine the matched records that you can merge with the target root record. Send the list of records in the request body for the Update Pending Merge API.

You can override field values in the root record. For example, if none of the matched root records contain the correct spelling of the first name, you can specify the correct first name in the request body. Also, you can remove matched records or specify other matching records.

Use the following properties in the request body:

Properties / Elements	Type	Description
keys	array	Required. An ordered list of the matched root records that you want to merge. You can identify the records either by row ID or by a combination of the source system and the source key.
overrides	object	Overrides the field values in a root record and the matches for child records.
MERGE	object	Overrides the field values in child records that you want to merge. Add the type of child record within the <code>overrides</code> object and then add the <code>MERGE</code> object.

The following JSON code sample identifies two root records to merge with the target root record:

```
{
  keys: [
    {rowid: "2478246"},
    {rowid: "2478230"}
  ]
}
```

The following sample request body shows how to override a field in the Party root record and how to override the matched records for Telephone child records:

```
{
  keys: [
    {
      rowid: "2478246"
    }
  ]
  overrides: {
    Party: {
      rowidObject: "2478230",
      firstName: "Charlie", //Override the value for the first name
      Telephone: { // Specifies the Telephone child records to merge
        item:[
          {
            rowidObject: "2511",
            MERGE: {
              item: [ // To remove the original merge candidates, specify null
                null,
                null
              ],
              $original: {
                item: [
                  {key:{rowid: "2822"}},
                  {key:{rowid: "2733"}}
                ]
              }
            }
          }
        ],
      },
      {
        rowidObject: "2644",
        MERGE: {
```



## Request URL

The Pending Merge URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowid>?
action=PendingMerge&interactionId=<interaction ID>
```

Make the following HTTP POST request to the Pending Merge URL:

```
POST http://<host>:<port>/<context>/<database ID>/<business entity>/<rowid of the
record>?action=Merge
```

## Query Parameter

The interaction ID of the pending merge is a required parameter.

## Sample API Request

The following sample request updates all pending merge tasks associated with the interaction ID:

```
POST /Person/123?action=pendingMerge&interactionId=123
```

## Sample API Response

The following sample response contains the row IDs of the affected root base objects:

```
{
  keys: [{rowid: "456"}, {rowid: "789"}],
  overrides: {...}
}
```

## PromoteMerge

The Promote Merge REST API runs all pending merge tasks associated with the interaction ID of the change request.

The API uses the POST method and returns the row ID of the winning record.

## Request URL

The Promote Merge URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowid>?
action=PromoteMerge&interactionId=<interaction ID>
```

Make the following HTTP POST request to the Promote Merge URL:

```
POST http://<host>:<port>/<context>/<database ID>/<business entity>/<rowid of the
record>?action=Merge
```

## Query Parameter

The interaction ID of the pending merge task is a required parameter. The API uses the interaction ID to find all pending merge tasks and runs the merges.

## Sample API Request

The following sample request promotes all pending merge tasks associated with the interaction ID:

```
POST /Person/123?action=promoteMerge&interactionId=123
```



## Sample API Response

The following sample response contains the row IDs of the records after promoting the pending merge tasks:

```
POST /Person/123?action=promoteMerge&interactionId=123
```

## File Transformation

The File Transformation API retrieves the list of business entities from the imported file before mapping the business entities to the target fields.

The API uses the POST method.

### Request URL

The Files Transformation API has the following format:

```
http://<host>:<port>/cmx/flatt2be/{orsId}/preview{?entity,fileId,pageSize}
```

Make the following HTTP POST request to the Files Transformation API URL:

```
POST /cmx/flatt2be/{orsId}/preview{?entity,fileId,pageSize}
```

### Parameters

Specify the properties to preview the list of business entities from the imported file before mapping the business entities to the target fields.

The following table describes the parameters.

Parameter	Description
fileId	File ID that will be used to generate the preview.
orsId	Operational reference store ID of the database to preview the mapping from.
entity	Optional. Number of business entities or relationship to preview.
pageSize	Optional. Number of pages to return.

### Sample API Request

The following sample request retrieves the list of mapped business entities from the imported file before mapping the business entities:

```
POST /cmx/flatt2be/localhost-orcl-MDM_SAMPLE/preview?entity=Person&fileId=TEMP_SVR1.1G7UW
HTTP/1.1
Content-Type: application/json
Host: localhost:8080
Content-Length: 431

{
  "regionalSettings" : {
    "locale" : "en-CA",
    "datePattern" : "d MMM, yyyy",
    "decimalSeparator" : ".",
    "thousandsSeparator" : ",",
  },
  "objects" : [ {
    "name" : "Person",
    "fields" : [ {
      "name" : "firstName",
```

```

        "fileColumn" : "first_name",
        "skipNulls" : false
    }, {
        "name" : "lastName",
        "fileColumn" : "last_name",
        "skipNulls" : false
    } ]
} ]
}

```

## Sample API Response

The following sample response shows the list of mapped business entities from the imported file before mapping the business entities to the target fields.

```

HTTP/1.1 200 OK
Server: JBoss-EAP/7
X-Powered-By: Undertow/1
Content-Type: application/json
Content-Length: 825

{
  "link" : [ ],
  "item" : [ {
    "object" : {
      "Person" : {
        "label" : "smith, alice",
        "lastName" : "smith",
        "firstName" : "alice"
      }
    }
  }, {
    "object" : {
      "Person" : {
        "label" : "smith, bob",
        "lastName" : "smith",
        "firstName" : "bob"
      }
    }
  }, {
    "object" : {
      "Person" : {
        "label" : "smith, charlie",
        "lastName" : "smith",
        "firstName" : "charlie"
      }
    }
  }, {
    "object" : {
      "Person" : {
        "label" : "smith, dave",
        "lastName" : "smith",
        "firstName" : "dave"
      }
    }
  }, {
    "object" : {
      "Person" : {
        "label" : "smith, eve",
        "lastName" : "smith",
        "firstName" : "eve"
      }
    }
  } ]
}

```

## Suggest Mapping

The Suggest Mapping REST API suggests mapping for the business entities or relationships in the imported file.

The API uses the GET method.

### Request URL

The Suggest Mapping API has the following format:

```
http://<host>:<port>/<context>/<orsId>/<suggest{?entity,fileId,purpose}>
```

Make the following HTTP GET request to the Suggest Mapping API URL:

```
GET http://<host>:<port>/<context>/<orsId>/<suggest{?entity,fileId,purpose}>
```

### Request Body

Specify the parameters to suggest mapping for the business entities or relationships in the imported file.

The following table describes the parameters in the request body.

Parameter	Type	Description
orsId	Path	ID of the Operational Reference Store database to preview the mapping from.
fileId	Query	Optional. File ID of the imported file.
purpose	Query	Optional. The purpose of the mapping and how it will be used.
entity	Query	Optional. Number of business entities or relationships to preview. If you specify the entity parameter, the API detects and returns mapping for the specified entity only.

### Sample API Request

The following sample request returns the suggested mapping for the business entities or relationships in the imported file:

```
GET /cmx/flat2be/localhost-orcl-MDM_SAMPLE/suggest?fileId=TEMP_SVR1.1G7UW HTTP/1.1
Host: localhost:8080
```

### Sample API Response

The following sample response shows the suggested mapping for the business entities or relationships in the imported file:

```
HTTP/1.1 200 OK
Server: JBoss-EAP/7
X-Powered-By: Undertow/1
Content-Type: application/json;charset=UTF-8
Content-Length: 1315

{
  "name" : "my_mapping",
  "systemName" : "Admin",
  "mapping" : {
    "confidence" : "HIGH",
    "regionalSettings" : {
```

```

        "locale" : "en-CA",
        "datePattern" : "MM-dd-yyyy",
        "decimalSeparator" : ".",
        "thousandsSeparator" : ",",
    },
    "objects" : [ {
        "confidence" : "HIGH",
        "name" : "PersonView",
        "fields" : [ {
            "confidence" : "HIGH",
            "name" : "firstName",
            "fileColumn" : "first_name",
            "skipNulls" : false
        }, {
            "confidence" : "HIGH",
            "name" : "jobTitle",
            "fileColumn" : "job_title",
            "skipNulls" : false
        }, {
            "confidence" : "HIGH",
            "name" : "lastName",
            "fileColumn" : "last_name",
            "skipNulls" : false
        }, {
            "confidence" : "HIGH",
            "name" : "birthdate",
            "fileColumn" : "birth_date",
            "skipNulls" : false
        }, {
            "confidence" : "HIGH",
            "name" : "genderCd",
            "fileColumn" : "gender",
            "skipNulls" : false
        } ],
        "children" : [ ]
    } ],
    "purpose" : "IMPORT"
},
"creator" : "admin",
"createDate" : "2020-01-13T12:39:37.186-05:00",
"updatedBy" : "admin",
"lastUpdateDate" : "2020-01-13T12:39:37.186-05:00",
"system" : false
}

```

## Merge Records

The Merge Records REST API merges two or more root records to create a single consolidated record. The row ID of the consolidated record is the row ID of the record to which you merge the other records.

The API uses the POST method. You can specify field-level overrides for the merged record in the request body.

### Request URL

The Merge Records URL has the following format:

```

http://<host>:<port>/<context>/<database ID>/<business entity>/<rowid of the record>?
action=Merge

```

Make the following HTTP POST request to the Merge Records URL:

```

POST http://<host>:<port>/<context>/<database ID>/<business entity>/<rowid of the
record>?action=Merge

```

Add the Content-Type header to specify the media type of the data you want to send with the request:

```
POST http://<host>:<port>/<context>/<database ID>/<business entity>/<rowid of the
record?>action=Merge
Content-Type: application/<json/xml>
```

## Query Parameters

The following table lists the parameters that you can use in the URL:

Parameter	Description
taskComment	Add a comment to the workflow task triggered by the API.
taskAttachments	If task attachments are enabled, attach a file to the workflow task triggered by the API.

## Request Body

Before you begin, use the Preview Merge API to preview the results of merging the selected root records. When you are happy with the preview, use the same properties in the request body for the Merge Records API.

You can override field values in the root record. For example, if none of the matched root records contain the correct spelling of the first name, you can specify the correct first name in the request body. Also, you can remove matched records or specify other matching records.

Use the following properties in the request body:

Properties / Elements	Type	Description
keys	array	Required. An ordered list of the matched root records that you want to merge. You can identify the records either by row ID or by a combination of the source system and the source key.
overrides	object	Overrides the field values in a root record and the matches for child records.
MERGE	object	Overrides the field values in child records that you want to merge. Add the type of child record within the <code>overrides</code> object and then add the <code>MERGE</code> object.

The following JSON code sample identifies two root records to merge with the target root record:

```
{
  keys: [
    {rowid: "2478246"},
    {rowid: "2478269"}
  ]
}
```

For an example of how to use the `overrides` and `MERGE` properties with the Merge Records API, see the request body for the Merge Preview API.

## Sample API Request

The following sample request merges records to form a consolidated record. The request adds a comment and attachment to the workflow task triggered by the API.

```
POST http://localhost:8080/cmxc/cs/localhost-orcl-DS_UI1/Person/2478245?
action=merge&taskComment=Read my comment&taskAttachments=TEMP_SVR1.290T8,TEMP_SVR1.290T9
Content-Type: application/<json/xml>

{
  keys: [
    {
      rowid: "2478246"
    }
  ],
  overrides: {
    Person: {
      firstName: "Charlie"
    }
  }
}
```

## Sample API Response

The following sample response shows the consolidated record:

```
{
  "Person": {
    "link": [
      {
        "href": "http://localhost:8080/cmxc/cs/localhost-orcl-DS_UI1/Person/
2478245",
        "rel": "self"
      }
    ],
    "key": {
      "rowid": "2478245"
    },
    "rowidObject": "2478245"
  }
}
```

## Unmerge Records

The Unmerge Records REST API unmerges a root record into the individual root records that existed before you merged the records.

The API uses the POST method.

### Request URL

The Unmerge Records URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?action=unmerge
```

Make the following HTTP POST request to the Unmerge Records URL:

```
POST http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?
action=unmerge
```

Add the Content-Type header to specify the media type of the data you want to send with the request:

```
POST http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?
action=unmerge
Content-Type: application/<json/xml>
```

## Query Parameters

The following table lists the parameters that you can use in the URL:

Parameter	Description
taskComment	Add a comment to the workflow task triggered by the API.
taskAttachments	If task attachments are enabled, attach a file to the workflow task triggered by the API.

## Request Body

Send the list of the records that you want to unmerge from the consolidated record in the request body. Use the xref row ID or the source system and the source key to specify the records.

Use the Read Record API to get the xref rowid of the record to unmerge. The following sample request retrieves the XREF metadata of a record:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/2638243?
contentMetadata=XREF
```

## Sample API Request

The following sample request unmerges a record from the consolidated record. The request adds a comment and attachment to the workflow task triggered by the API.

```
POST http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/2478248?
action=unmerge&taskComment=Read my
comment&taskAttachments=TEMP_SVR1.29OT8,TEMP_SVR1.29OT9

{
    rowid: "4880369"
}
```

## Sample API Response

The following sample response shows the record that you unmerge from the consolidated record:

```
{
  "Person": {
    "link": [
      {
        "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/
2478249",
        "rel": "self"
      }
    ],
    "key": {
      "rowid": "2478249"
    },
    "rowidObject": "2478249"
  }
}
```

## Create Mapping

The Create Mapping REST API creates a new mapping when you imported a new file into the database.

The API uses the POST method.

## Request URL

The Create Mapping URL has the following format:

```
http://<host>:<port>/<context>/<orsId>/<mapping>
```

Make the following HTTP POST request to the Create Mapping URL:

```
POST //<host>:<port>/<context>/<orsId>/<mapping>
```

## Parameters

Specify the parameters to create a new mapping in the request body. Use JSON or XML format to create a mapping in the request.

The following table describes the parameters in the request body:

Parameter	Type	Description
orsID	Path	Operational Reference Store database ID to create a new mapping.
mapping	Query	Optional. Enter the properties of the mapping.
confidence	Query	Optional. Confidence level of the mapping. Use any of the following values: High, Medium or Low.
creator	Query	Optional. Your user name.
createDate	Query	Optional. Date when you create the mapping.
UpdatedBy	Query	Optional. If you are updating an existing mapping, enter your user name.
lastUpdateDate	Query	Optional. Date when the user updates the mapping.
modified	Query	Optional. Use the following values: true if you are modifying an existing mapping or false if you are creating a new mapping.
name	Query	Optional. Name of the mapping.
score	Query	Optional. Match score of the mapping.
system	Query	Optional. Use the following values: True: If the system creates the mapping. False: If a user manually creates the mapping.
systemName	Query	Optional. Name of the system that creates the mapping.
objects	Query	Optional. Enter the fields you want for the business entity or relationship base object.

## Sample API Request

The following sample request creates a new mapping:

```
POST /cmx/fla2be/localhost-orcl-MDM_SAMPLE/mapping HTTP/1.1
Content-Type: application/json
Host: localhost:8080
Content-Length: 737
```



```

{
  "mapping" : {
    "regionalSettings" : {
      "locale" : "en-CA",
      "datePattern" : "dd-MM-yyyy",
      "decimalSeparator" : ".",
      "thousandsSeparator" : ",",
    },
    "objects" : [ {
      "name" : "PersonView",
      "fields" : [ {
        "name" : "firstName",
        "fileColumn" : "first_name",
        "skipNulls" : false
      }, {
        "name" : "jobTitle",
        "fileColumn" : "job_title",
        "skipNulls" : false
      }, {
        "name" : "lastName",
        "fileColumn" : "last_name",
        "skipNulls" : false
      }, {
        "name" : "birthdate",
        "fileColumn" : "birth_date",
        "skipNulls" : false
      } ]
    } ],
    "purpose" : "IMPORT"
  }
}

```

## Sample API Response

The following sample response shows the new mapping created in the database.

```

HTTP/1.1 201 Created
Server: JBoss-EAP/7
X-Powered-By: Undertow/1
Location: http://localhost:8080/cmx/flat2be/localhost-orcl-MDM_SAMPLE/mapping/SVR1.1G7UX
Content-Type: application/json;charset=UTF-8
Content-Length: 27

{
  "id" : "SVR1.1G7UX"
}

```

## Preview Mapping

The Preview Mapping REST API retrieves the list of mapped business entities from the imported file.

The API uses the GET method.

### Request URL

The Preview Mapping API has the following format:

```
http://<host>:<port>/<context>/<orsId>/<preview{?entity,fileId,mapping,pageSize}>
```

Make the following HTTP GET request to the Preview Mapping API URL:

```
GET http://<host>:<port>/<context>/<orsId>/<preview{?entity,fileId,mapping,pageSize}>
```

## Parameters

Specify the parameters to preview the list of mapped business entities from the imported file.

The following table describes the parameters in the request body:

Parameter	Type	Description
orsId	Path	Operational reference store ID of the database to preview the mapping from.
fileId	Query	File ID. If specified, the API retrieves the mapped business entities from the specified file ID.
mappingId	Query	Optional. Enter the mapping ID of the imported file.
entity	Query	Optional. Enter the number of business entities or relationships to preview.
pageSize	Query	Optional. Enter the number of pages or the records to return.

## Sample API Request

The following sample request provides a preview of the mapped business entities from the imported file:

```
GET /cmx/flat2be/localhost-orcl-MDM_SAMPLE/preview?
mapping=SVR1.1G7UX&entity=PersonView&fileId=TEMP_SVR1.1G7UW HTTP/1.1
Host: localhost:8080
```

## Sample API Response

The following sample response shows a preview of the mapped business entities from the imported file:

```
HTTP/1.1 200 OK
Server: JBoss-EAP/7
X-Powered-By: Undertow/1
Content-Type: application/json
Content-Length: 1751

{
  "link" : [ ],
  "item" : [ {
    "object" : {
      "PersonView" : {
        "firstName" : "alice",
        "lastName" : "smith",
        "birthdate" : "1950-01-01T00:00:00-05:00",
        "genderCd" : {
          "genderCode" : "F",
          "genderDisp" : "F"
        },
        "jobTitle" : "developer"
      }
    }
  }, {
    "object" : {
      "PersonView" : {
        "firstName" : "bob",
        "lastName" : "smith",
        "birthdate" : "1960-02-02T00:00:00-05:00",
        "genderCd" : {
          "genderCode" : "M",
          "genderDisp" : "M"
        }
      }
    }
  }
]
```

```

    },
    "jobTitle" : "tester"
  }
}, {
  "object" : {
    "PersonView" : {
      "firstName" : "charlie",
      "lastName" : "smith",
      "birthdate" : "1970-03-03T00:00:00-05:00",
      "genderCd" : {
        "genderCode" : "X",
        "genderDisp" : "X"
      },
      "jobTitle" : "manager"
    }
  }
}, {
  "object" : {
    "PersonView" : {
      "firstName" : "dave",
      "lastName" : "smith",
      "genderCd" : {
        "genderCode" : "M",
        "genderDisp" : "M"
      },
      "jobTitle" : "accountant"
    }
  },
  "errors" : [ {
    "code" : "SIP-55206",
    "message" : "Failed to convert value [ten years ago] for field [birthdate].",
    "row" : 3,
    "column" : "birth_date",
    "field" : "birthdate"
  } ]
}, {
  "object" : {
    "PersonView" : {
      "firstName" : "eve",
      "lastName" : "smith",
      "birthdate" : "1990-04-04T00:00:00-04:00",
      "genderCd" : {
        "genderCode" : "F",
        "genderDisp" : "F"
      },
      "jobTitle" : ""
    }
  }
} ]
}

```

## Find Mapping

The Find Mapping REST API finds the existing user or system defined mapping by the mapping ID.

The API uses the GET method.

### Request URL

The Find Mapping URL has the following format:

```

http://<host>:<port>/<context>/<orsId>/<mappingId>
createdBy,fileId,firstRecord,purpose,recordsToReturn,returnTotal

```

Make the following HTTP GET request to the Find Mapping URL:

```
GET http://<host>:<port>/<context>/<orsId>/<mapping {?
  createdBy, fileId, firstRecord, purpose, recordsToReturn, returnTotal}>
```

## Parameters

Specify the parameters to find the existing user or system defined mapping by the mapping ID.

The following table describes the parameters in the request body:

Parameter	Path	Description
orsId	Path	Operational Reference Store database ID to find the mapping.
fileId	Query	File ID. If specified, the API retrieves the mapping from the specified file ID.
createdBy	Query	Enter the user who created the mapping.
firstRecord	Query	Optional. Enter to return only the first row of the record.
purpose	Query	Optional. Use the following values: Import: If you are creating a new mapping. Match: If you are matching an existing mapping.
recordsToReturn	Query	Optional. Enter the number of records to return.
returnTotal	Query	Optional. Enter the total number of records.

## Sample API Request

The following sample request finds the existing user or system defined mapping by the mapping ID:

```
GET http://<host>:<port>/cmx/flat2be/{orsId}/mapping{?
  createdBy, fileId, firstRecord, purpose, recordsToReturn, returnTotal}
```

## Sample API Response

The following sample response shows the existing user or system defined mapping by the mapping ID:

```
{
  mappings: [
    {
      id: 123, name: "....", ...
    },
    ...
  ]
}
```

## Read Mapping

The Read Mapping REST API returns existing business entities or relationships mapping by the mapping ID.

The API uses the GET method.

## Request URL

The Read Mapping URL has the following format:

```
http://<host>:<port>/<context>/<orsId>/<mapping>/<id><fileId>
```

Make the following HTTP GET request to the Read Mapping URL:

```
GET http://<host>:<port>/<context>/<orsId>/<mapping>/<id><fileId>
```

## Parameters

Specify the parameters to return the mapped business entities or relationships from the imported file ID.

The following table describes the parameters in the request body.

Parameter	Type	Description
mappingId	Path	Name of the mapping given by the user.
orsId	Path	Operational Reference Store database ID to retrieve the mapping from.
fileId	Query	Optional. Specify the file ID associated with the existing mapping.

## Sample API Request

The following sample request returns mapped business entities or relationships by the mapping ID:

```
GET /cmx/flat2be/localhost-orcl-MDM_SAMPLE/mapping/SVR1.1G7UX HTTP/1.1
Content-Type: application/json
Host: localhost:8080
```

## Sample API Response

The following sample response returns existing business entities or relationships by the mapping ID:

```
HTTP/1.1 200 OK
Server: JBoss-EAP/7
Content-Disposition: inline;filename=f.txt
X-Powered-By: Undertow/1
Content-Type: application/json;charset=UTF-8
Content-Length: 993
```

```
{
  "id" : "SVR1.1G7UX",
  "systemName" : "Admin",
  "mapping" : {
    "regionalSettings" : {
      "locale" : "en-CA",
      "datePattern" : "dd-MM-yyyy",
      "decimalSeparator" : ".",
      "thousandsSeparator" : ","
    },
    "objects" : [ {
      "name" : "PersonView",
      "fields" : [ {
        "name" : "firstName",
        "fileColumn" : "first_name",
        "skipNulls" : false
      }, {
        "name" : "jobTitle",
        "fileColumn" : "job_title",
        "skipNulls" : false
      }
    ]
  }
}
```

```

    }, {
      "name" : "lastName",
      "fileColumn" : "last_name",
      "skipNulls" : false
    }, {
      "name" : "birthdate",
      "fileColumn" : "birth_date",
      "skipNulls" : false
    } ],
    "children" : [ ]
  } ],
  "purpose" : "IMPORT"
},
"creator" : "admin",
"createDate" : "2020-01-13T13:06:26.153-05:00",
"updatedBy" : "admin",
"lastUpdateDate" : "2020-01-13T13:06:26.153-05:00",
"system" : true
}

```

## Update Mapping

The Update Mapping REST API updates the existing mapping with new data.

The API uses the PUT method.

### Request URL

The Update Mapping URL has the following format:

```
http://<host>:<port>/<context>/<orsId>/<mapping>/<mappingId>
```

Make the following HTTP PUT request to the Update Mapping URL:

```
PUT http://<host>:<port>/<context>/<orsId>/<mapping>/<mappingId>
```

### Parameters

Specify the parameters to update the user defined mapping in the request body. Use JSON or XML format to create a mapping in the request.

The following table describes the parameters in the request body.

Parameter	Type	Description
mappingID	Path	Mapping ID of the user data.
orsId	Path	Operational Reference Store database ID.
mapping	Query	Optional. Enter the properties of the mapping.
confidence	Query	Optional. Confidence level of the mapping. Use any of the following values: High, Medium or Low.
creator	Query	Optional. Your user name.
createDate	Query	Optional. Date when you create the mapping.
UpdatedBy	Query	Optional. If you are updating an existing mapping, enter your user name.

Parameter	Type	Description
lastUpdateDate	Query	Optional. Date when the user updates the mapping.
modified	Query	Optional. Use the following values: true if you are modifying an existing mapping or false if you are creating a new mapping.
name	Query	Optional. Name of the mapping.
score	Query	Optional. Match score of the mapping.
system	Query	Optional. Use the following values: True: If the system creates the mapping. False: If a user manually creates the mapping.
systemName	Query	Optional. Displays the name of the system that creates the mapping.
objects	Query	Optional. Enter the fields you want for the business entity or relationship base object.
purpose	Query	Optional. Use the following values: Import: If you are creating a new mapping. Match: If you are matching an existing mapping.

## Sample API Request

The following sample request updates existing mapping with new data.

```
PUT /cmx/flat2be/localhost-orcl-MDM_SAMPLE/mapping/SVR1.1G7UX HTTP/1.1
Content-Type: application/json
Host: localhost:8080
Content-Length: 889
```

```
{
  "system" : false,
  "name" : "my_mapping",
  "mapping" : {
    "regionalSettings" : {
      "locale" : "en-CA",
      "datePattern" : "dd-MM-yyyy",
      "decimalSeparator" : ".",
      "thousandsSeparator" : ","
    },
    "objects" : [ {
      "name" : "PersonView",
      "fields" : [ {
        "name" : "firstName",
        "fileColumn" : "first_name",
        "skipNulls" : false
      }, {
        "name" : "jobTitle",
        "fileColumn" : "job_title",
        "skipNulls" : false
      }, {
        "name" : "lastName",
        "fileColumn" : "last_name",
        "skipNulls" : false
      }, {
        "name" : "birthdate",
        "fileColumn" : "birth_date",
        "skipNulls" : false
      }, {

```

```

        "name" : "genderCd",
        "fileColumn" : "gender",
        "skipNulls" : false
    } ]
} ],
"purpose" : "IMPORT"
}
}

```

## Sample API Response

The following is the sample response after successfully updating the existing mapping with new data:

```

HTTP/1.1 204 No Content
Server: JBoss-EAP/7
X-Powered-By: Undertow/1

```

## File Transformation

The File Transformation API retrieves the list of business entities from the imported file before mapping the business entities to the target fields.

The API uses the POST method.

### Request URL

The Files Transformation API has the following format:

```
http://<host>:<port>/cmx/flat2be/{orsId}/preview{?entity,fileId,pageSize}
```

Make the following HTTP POST request to the Files Transformation API URL:

```
POST /cmx/flat2be/{orsId}/preview{?entity,fileId,pageSize}
```

### Parameters

Specify the properties to preview the list of business entities from the imported file before mapping the business entities to the target fields.

The following table describes the parameters.

Parameter	Description
fileId	File ID that will be used to generate the preview.
orsId	Operational reference store ID of the database to preview the mapping from.
entity	Optional. Number of business entities or relationship to preview.
pageSize	Optional. Number of pages to return.

### Sample API Request

The following sample request retrieves the list of mapped business entities from the imported file before mapping the business entities:

```

POST /cmx/flat2be/localhost-orcl-MDM_SAMPLE/preview?entity=Person&fileId=TEMP_SVR1.1G7UW
HTTP/1.1
Content-Type: application/json
Host: localhost:8080

```



Content-Length: 431

```
{
  "regionalSettings" : {
    "locale" : "en-CA",
    "datePattern" : "d MMM, yyyy",
    "decimalSeparator" : ".",
    "thousandsSeparator" : ",",
  },
  "objects" : [ {
    "name" : "Person",
    "fields" : [ {
      "name" : "firstName",
      "fileColumn" : "first_name",
      "skipNulls" : false
    }, {
      "name" : "lastName",
      "fileColumn" : "last_name",
      "skipNulls" : false
    } ]
  } ]
}
```

## Sample API Response

The following sample response shows the list of mapped business entities from the imported file before mapping the business entities to the target fields.

```
HTTP/1.1 200 OK
Server: JBoss-EAP/7
X-Powered-By: Undertow/1
Content-Type: application/json
Content-Length: 825
```

```
{
  "link" : [ ],
  "item" : [ {
    "object" : {
      "Person" : {
        "label" : "smith, alice",
        "lastName" : "smith",
        "firstName" : "alice"
      }
    }
  }, {
    "object" : {
      "Person" : {
        "label" : "smith, bob",
        "lastName" : "smith",
        "firstName" : "bob"
      }
    }
  }, {
    "object" : {
      "Person" : {
        "label" : "smith, charlie",
        "lastName" : "smith",
        "firstName" : "charlie"
      }
    }
  }, {
    "object" : {
      "Person" : {
        "label" : "smith, dave",
        "lastName" : "smith",
        "firstName" : "dave"
      }
    }
  }, {

```

```

    "object" : {
      "Person" : {
        "label" : "smith, eve",
        "lastName" : "smith",
        "firstName" : "eve"
      }
    }
  } ]
}

```

## Read a Relationship

The Read Relationship REST API returns the details of a relationship record, such as the party types, rowIDs, and display names of the two records.

The API uses the GET method.

### Request URL

The Read Relationship URL has the following format:

```

http://<host>:<port>/<context>/<database ID>/<relationship>/<row ID of the relationship record>

```

Make the following HTTP GET request to the URL:

```

GET http://<host>:<port>/<context>/<database ID>/<relationship>/<row ID of the relationship record>

```

### Query Parameters

The following table lists the query parameters:

Parameter	Description
suppressLinks	Optional. Indicates whether the parent-child links are visible in the API response. Set the parameter to true to suppress all the parent-child links in the response. Set the parameter to false to not display the links in the API response. Default is false.
depth	Optional. Number of child levels to return.

### Sample API Request

The following sample request returns the details of the relationship record with the row ID 85, which is of the relationship type `ProductGroupProductGroupIsParentOfProductProducts`:

```

GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/ProductGroupProductGroupIsParentOfProductProducts/85

```

The following sample request returns the details with depth equal to 2:

```

GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/ProductGroupProductGroupIsParentOfProductProducts/85?depth=2

```

### Sample API Response

The following example shows the details of the relationship record with the row ID 85, which is of the relationship type `ProductGroupProductGroupIsParentOfProductProducts`:

```

{
  "link": [

```

```

    {
      "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/
ProductGroupProductGroupIsParentOfProductProducts/85.json",
      "rel": "self"
    },
    {
      "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/
ProductGroupProductGroupIsParentOfProductProducts/85.json?depth=2",
      "rel": "children"
    }
  ],
  "rowidObject": "85",
  "label": "ProductGroup Product Group is parent of Product Products",
  "rowidRelType": "9",
  "rowidHierarchy": "3",
  "from": {
    "link": [
      {
        "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/
ProductGroupProductGroupIsParentOfProductProducts/85.json",
        "rel": "parent"
      },
      {
        "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/
ProductGroupProductGroupIsParentOfProductProducts/85/from/86.json",
        "rel": "self"
      },
      {
        "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/
ProductGroupProductGroupIsParentOfProductProducts/85/from/86.json?depth=2",
        "rel": "children"
      }
    ]
  },
  "rowidObject": "86",
  "label": "ProductGroup",
  "productType": "Product Group",
  "productNumber": "Presenter2",
  "productName": "Presenter",
  "productDesc": "Presenter Family",
  "productTypeCd": {
    "link": [
      {
        "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/
ProductGroupProductGroupIsParentOfProductProducts/85/from/86.json",
        "rel": "parent"
      },
      {
        "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/
ProductGroupProductGroupIsParentOfProductProducts/85/from/86/productTypeCd.json?depth=2",
        "rel": "children"
      },
      {
        "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/
ProductGroupProductGroupIsParentOfProductProducts/85/from/86/productTypeCd.json",
        "rel": "self"
      }
    ]
  },
  "productType": "Product Group"
},
"to": {
  "link": [
    {
      "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/
ProductGroupProductGroupIsParentOfProductProducts/85/to/66.json",
      "rel": "self"
    },
    {
      "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/
ProductGroupProductGroupIsParentOfProductProducts/85/to/66.json?depth=2",
      "rel": "children"
    }
  ]
}

```

```

    },
    {
      "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/
ProductGroupProductGroupIsParentOfProductProducts/85.json",
      "rel": "parent"
    }
  ],
  "rowidObject": "66",
  "label": "Products",
  "productType": "Product",
  "productNumber": "931307-0403",
  "productName": "2.4 GHz Cordless Presenter",
  "productDesc": "A cordless presenter to streamline your delivery.",
  "productTypeCd": {
    "link": [
      {
        "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/
ProductGroupProductGroupIsParentOfProductProducts/85/to/66/productTypeCd.json",
        "rel": "self"
      },
      {
        "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/
ProductGroupProductGroupIsParentOfProductProducts/85/to/66.json",
        "rel": "parent"
      },
      {
        "href": "http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/
ProductGroupProductGroupIsParentOfProductProducts/85/to/66/productTypeCd.json?depth=2",
        "rel": "children"
      }
    ],
    "productType": "Presenter"
  }
}
}
}

```

## Create a Relationship

The Create Relationship REST API creates a relationship between the specified records. To create a relationship between records, relationships must exist between the business entities to which the records belong. For example, if you want to specify a relationship between Informatica and John Smith, a relationship must exist between the Organization and the Person business entities. You must send the relationship data in the request body.

The API uses the PUT and the POST methods.

### Request URL

The Create Relationship REST URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<relationship>?systemName=<name of the
source system>
```

**Note:** The name of the source system is a required parameter in the URL.

Make the following HTTP POST or PUT request to the URL:

```
POST http://<host>:<port>/<context>/<database ID>/<relationship>?systemName=<name of the
source system>
```

Add the Content-Type header to specify the media type of the data you want to send with the request:

```
Content-Type: application/<json/xml>
```

## URL Parameters

The name of the source system is a required parameter in the request URL.

## Request Body

Send data for the relationship record in the REST request body. Use the JSON format or the XML format to send data. Provide the required parameter values in the request body.

## Sample API Request

The following sample request creates the `OrganizationEmploysPerson` relationship between an Organization business entity with row ID 101 and a Person business entity with row ID 1101:

```
POST http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/OrganizationEmploysPerson?
systemName=SFA
Content-Type: application/json

{
  "from": {
    "rowidObject": "101"
  },
  "to": {
    "rowidObject": "1101"
  },
  "relName": "Documentation",
  "relDesc": "Writer"
}
```

The `OrganizationEmploysPerson` relationship defines a relationship from an Organization business entity to a Person business entity. The `from` element specifies the record from which the relationship originates and the `to` element specifies the record at which the relationship ends.

## Sample API Response

The following sample response shows the response header and body after successfully creating a relationship between an Organization business entity with row ID 101 and a Person business entity with row ID 1101:

```
{
  "OrganizationEmploysPerson": {
    "key": {
      "rowid": "414721"
      "sourceKey": "SVR1.1E7UW"
    }-
  }-
  "rowidObject": "414721"
  "from": {
    "key": {
      "rowid": "101 "
    }-
    "rowidObject": "101 "
  }-
  "to": {
    "key": {
      "rowid": "1101 "
    }-
  }-
  "rowidObject": "1101 "
}
```

```
    }-  
  }
```

## Update a Relationship

The Update Relationship REST API updates the relationship between two records. The API updates the additional attributes defined for the relationship.

The API uses the POST and the PUT methods.

### Request URL

Update Relationship URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<relationship>/<row ID>?systemName=<name of  
the source system>
```

**Note:** The name of the source system is a required parameter in the URL.

Make the following HTTP POST or PUT call to the URL:

```
http://<host>:<port>/<context>/<database ID>/<relationship>/<row ID>?systemName=<name of  
the source system>
```

Add the Content-Type header to specify the media type of the data you want to send with the request.

### Request Body

Send the updates to the relationship record in the request body. Use the JSON format or the XML format to send data. Provide the required parameter values in the request body.

### Sample API Request

The relationship with the row ID 414721 is a OrganizationEmploysPerson relationship between an Organization entity with row ID 101 and a Person entity with row ID 1101.

The following sample request updates the relationship record with the row ID 414721:

```
POST http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/OrganizationEmploysPerson/414721?  
systemName=SFA  
Content-Type: application/json  
{  
  "from": {  
    "rowidObject": "101"  
  },  
  "to": {  
    "rowidObject": "1101"  
  },  
  "relName": "Development",  
  "relDesc": "Software Engineer",  
  "$original":  
    {"relName": "Documentation",  
     "relDesc": "Writer"}  
}
```

## Sample API Response

The following sample response is received after successfully updating the relationship with the row ID 414721:

```
{
  "OrganizationEmploysPerson": {
    "key": {
      "rowid": "414721"
      "sourceKey": "SVR1.1E7UW"
    }-
    "rowidObject": "414721"
    "from": {
      "key": {
        "rowid": "101"
      }-
      "rowidObject": "101"
    }-
    "to": {
      "key": {
        "rowid": "1101 "
      }-
      "rowidObject": "1101 "
    }-
  }-
}
```

## Delete a Relationship

The Delete Relationship REST API deletes the relationship between two records.

The API uses the DELETE method.

### Request URL

The Delete Relationship URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<relationship>/<rowID of the relationship record>?systemName=<name of the source system>
```

**Note:** The name of the source system as a required parameter in the URL.

Make the following HTTP DELETE request to the Delete URL:

```
DELETE http://<host>:<port>/<context>/<database ID>/<relationship>/<rowID of the relationship record>?systemName=<name of the source system>
```

### Query Parameter

The name of the source system is a required URL parameter. Use the `systemName` parameter to specify the source system.

### Sample API Request

The following sample request deletes a relationship record with the row ID 414721:

```
DELETE http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/OrganizationEmploysPerson/414721?systemName=SFA
```

## Sample API Response

The following sample response shows the response after successfully deleting the relationship record with the row ID 414721:

```
{
  "OrganizationEmployeePerson": {
    "key": {
      "rowid": "414721"
    }-
  }-
  "rowidObject": "414721"
}-
}
```

## Get Related Records

The Get Related Records REST API returns a list of records related to a specified root record based on the relationships that you have configured. The API also returns the details of the relationships.

The API uses the GET method.

### Request URL

The Get Related Records URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?action=related
```

Make the following HTTP GET request to the Get Related Records URL:

```
GET http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?action=related
```

### Query Parameters

You can append the query parameters to the request URL.

The following table lists the query parameters that you can use:

Parameter	Description
recordsToReturn	Number of records for the <code>many</code> child that you want to read.
searchToken	Search token to fetch subsequent pages of the result set.
returnTotal	Returns the number of records in the result set. Set to <code>true</code> to get the number of records in the result set. Default is <code>false</code> .



## Filter Parameters

You can append parameters to the URL to filter the related records.

The following table lists the filter parameters that you can use:

Parameter	Description
recordStates	A comma-separated list of states of records that you want to retrieve. The supported record states are ACTIVE, PENDING, and DELETED. Default is ACTIVE. For example, the <code>/Party/123?action=related&amp;recordStates=ACTIVE,PENDING</code> query returns records that are active or pending.
entityLabel	Label of the entity.
relationshipLabel	Label of the relationship.
entityType	Comma-separated list of entity types. For example, the <code>entityType=Person,Organization</code> list returns related records of the <code>Person</code> and <code>Organization</code> entity type.
relationshipType	Comma-separated list of relationship types. For example, the <code>relationshipType=Employee,Employer</code> list returns related records of the <code>Employee</code> and <code>Employer</code> relationship types.

**Note:** If you specify multiple filter conditions, the result contains all the records that satisfy the AND condition.

## Response Body

The response body contains the list of related records, details of the related records and the relationships, and a search token. Use the search token to fetch the subsequent pages of the results.

## Sample API Request

The following sample request fetches the related records and relationships configured for the `Organization` business entity with the row ID 101:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Organization/101?action=related
```

## Sample API Response

The following sample response shows the related records and relationships for the `Organization` business entity type with the row ID 101:

```
{
  "link": [],
  "firstRecord": 1,
  "pageSize": 10,
  "searchToken": "SVR1.1H7YB",
  "relatedEntity": [
    {
      "businessEntity": {
        "SecurePerson": {
          "link": [
            {
              "href": "http://10.21.43.42:8080/cmx/cs/localhost-orcl-ds_ui1/SecurePerson/1101",
              "rel": "self"
            }
          ]
        }
      }
    }
  ]
}
```

```

    ],
    "rowidObject": "1101",
    "creator": "admin",
    "createDate": "2008-11-11T21:22:20-08:00",
    "updatedBy": "admin",
    "lastUpdateDate": "2012-03-29T19:03:19-07:00",
    "consolidationInd": "1",
    "lastRowidSystem": "SYS0",
    "dirtyIndicator": "0",
    "interactionId": "20003000",
    "hubStateInd": "1",
    "partyType": "Person",
    "lastName": "Obama",
    "firstName": "Barack"
  }
},
"entityLabel": "Obama,Barack",
"relationshipLabel": "Organization employes SecurePerson",
"relationship": {
  "rowidObject": "414721",
  "creator": "admin",
  "createDate": "2016-10-17T01:58:12.436-07:00",
  "updatedBy": "admin",
  "lastUpdateDate": "2016-10-19T01:40:28.830-07:00",
  "consolidationInd": "4",
  "lastRowidSystem": "SFA",
  "interactionId": "1476866426786",
  "hubStateInd": "1",
  "rowidRelType": "101",
  "rowidHierarchy": "1",
  "relName": "Documentation",
  "relDesc": "Writer"
},
"entityType": "SecurePerson",
"relationshipType": "OrganizationEmployesSecurePerson"
},
{
  "businessEntity": {
    "SecurePerson": {
      "link": [
        {
          "href": "http://10.21.43.42:8080/cmx/cs/localhost-orcl-ds_ui/SecurePerson/114",
          "rel": "self"
        }
      ]
    }
  },
  "rowidObject": "114",
  "creator": "admin",
  "createDate": "2008-08-11T23:00:55-07:00",
  "updatedBy": "Admin",
  "lastUpdateDate": "2008-08-12T02:59:17-07:00",
  "consolidationInd": "1",
  "lastRowidSystem": "Legacy",
  "dirtyIndicator": "0",
  "hubStateInd": "1",
  "partyType": "Person",
  "lastName": "HERNANDEZ",
  "displayName": "ALEJANDRO HERNANDEZ",
  "firstName": "ALEJANDRO"
}
},
"entityLabel": "HERNANDEZ,ALEJANDRO",
"relationshipLabel": "Organization employes SecurePerson",
"relationship": {
  "rowidObject": "434721",
  "creator": "admin",
  "createDate": "2016-10-19T01:49:03.415-07:00",
  "updatedBy": "admin",
  "lastUpdateDate": "2016-10-19T01:49:03.415-07:00",
  "consolidationInd": "4",
  "lastRowidSystem": "SFA",

```

```

        "hubStateInd": "1",
        "rowidRelType": "101",
        "rowidHierarchy": "1",
        "relName": "Documentation",
        "relDesc": "Writer"
    },
    "entityType": "SecurePerson",
    "relationshipType": "OrganizationEmployeesSecurePerson"
},
{
    "businessEntity": {
        "Person": {
            "link": [
                {
                    "href": "http://10.21.43.42:8080/cmx/cs/localhost-orcl-ds_ui1/Person/1101",
                    "rel": "self"
                }
            ]
        },
        "rowidObject": "1101",
        "creator": "admin",
        "createDate": "2008-11-11T21:22:20-08:00",
        "updatedBy": "admin",
        "lastUpdateDate": "2012-03-29T19:03:19-07:00",
        "consolidationInd": "1",
        "lastRowidSystem": "SYS0",
        "dirtyIndicator": "0",
        "interactionId": "20003000",
        "hubStateInd": "1",
        "partyType": "Person",
        "lastName": "Obama",
        "firstName": "Barack"
    }
},
"entityLabel": "Obama,Barack",
"relationshipLabel": "Organization employes Person",
"relationship": {
    "rowidObject": "414721",
    "creator": "admin",
    "createDate": "2016-10-17T01:58:12.436-07:00",
    "updatedBy": "admin",
    "lastUpdateDate": "2016-10-19T01:40:28.830-07:00",
    "consolidationInd": "4",
    "lastRowidSystem": "SFA",
    "interactionId": "1476866426786",
    "hubStateInd": "1",
    "rowidRelType": "101",
    "rowidHierarchy": "1",
    "relName": "Documentation",
    "relDesc": "Writer"
},
"entityType": "Person",
"relationshipType": "OrganizationEmployeesPerson"
},
{
    "businessEntity": {
        "Person": {
            "link": [
                {
                    "href": "http://10.21.43.42:8080/cmx/cs/localhost-orcl-ds_ui1/Person/114",
                    "rel": "self"
                }
            ]
        },
        "rowidObject": "114",
        "creator": "admin",
        "createDate": "2008-08-11T23:00:55-07:00",
        "updatedBy": "Admin",
        "lastUpdateDate": "2008-08-12T02:59:17-07:00",
        "consolidationInd": "1",
        "lastRowidSystem": "Legacy",
        "dirtyIndicator": "0",
        "hubStateInd": "1",
    }
}

```

```

        "partyType": "Person",
        "lastName": "HERNANDEZ",
        "displayName": "ALEJANDRO HERNANDEZ",
        "statusCd": "A",
        "firstName": "ALEJANDRO"
    }
},
"entityLabel": "HERNANDEZ,ALEJANDRO",
"relationshipLabel": "Organization employees Person",
"relationship": {
    "rowidObject": "434721",
    "creator": "admin",
    "createDate": "2016-10-19T01:49:03.415-07:00",
    "updatedBy": "admin",
    "lastUpdateDate": "2016-10-19T01:49:03.415-07:00",
    "consolidationInd": "4",
    "lastRowidSystem": "SFA",
    "hubStateInd": "1",
    "rowidRelType": "101",
    "rowidHierarchy": "1",
    "relName": "Documentation",
    "relDesc": "Writer"
},
"entityType": "Person",
"relationshipType": "OrganizationEmployeesPerson"
}
]
}

```

## Export Related Business Entities

Enter a short description of the concept here (required).

This is the start of the concept.

### Request URL

Enter a short description of the concept here (required).

This is the start of the concept.

### Sample API Request

Enter a short description of the concept here (required).

This is the start of the concept.

### Sample API Response

Enter a short description of the concept here (required).

This is the start of the concept.

## List Hierarchies

The List Hierarchies REST API returns all hierarchies. You can also use the API to return the hierarchies that contain a specified business entity at any level.

The API uses the GET method.

## Request URL

The List Hierarchies URL can have the following formats:

### URL to return all hierarchies

Use the following URL to list all hierarchies:

```
http://<host>:<port>/<context>/<database ID>/metadata/hierarchy
```

### URL to return all hierarchies that contain a specified business entity

Use the following URL to list all hierarchies that contain a specified business entity at any level:

```
http://<host>:<port>/<context>/<database ID>/metadata/hierarchy?entityName=<entity name>
```

## Sample API Request

The following sample request lists all hierarchies:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/metadata/hierarchy
```

The following sample request lists all hierarchies that contain the Product business entity:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/metadata/hierarchy?entityName=Product
```

## Sample API Response

The following sample response shows the hierarchies that contain the Product business entity:

```
{
  "link": [],
  "item": [
    {
      "operations": {
        "read": {
          "allowed": true
        },
        "update": {
          "allowed": true
        }
      },
      "root": "ProductGroup",
      "name": "Product"
    }
  ]
}
```

## Get Hierarchy Metadata

The Get Hierarchy Metadata REST API returns the metadata for a hierarchy.

The API uses the GET method.

## Request URL

The Get Hierarchy Metadata URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/metadata/hierarchy/<hierarchy name>
```

Make the following HTTP GET request to the Get Hierarchy Metadata URL:

```
GET http://<host>:<port>/<context>/<database ID>/metadata/hierarchy/<hierarchy name>
```

## Sample API Request

The following sample request returns the metadata for a hierarchy:

```
GET http://localhost:8080/cm/cs/localhost-orcl-DS_UI1/metadata/hierarchy/ODI
```

## Sample API Response

The following sample response shows the metadata for a hierarchy:

```
{
  "relationship": [
    {
      "field": [
        {
          "allowedValues": [
            "2"
          ],
          "name": "rowidRelType",
          "label": "Rowid Rel Type",
          "dataType": "String",
          "length": 14,
          "readOnly": false,
          "required": false,
          "system": false,
          "trust": false,
          "applyNullValues": false,
          "displayFormat": "DATETIME_LONG_FORMAT",
          "filterable": true,
          "sortable": true,
          "lookup": {
            "link": [
              {
                "href": "http://localhost:8080/cm/lookup/localhost-orcl-MDM_SAMPLE/id-
label/IsOdiParentOf/rowidRelType",
                "rel": "lookup"
              },
              {
                "href": "http://localhost:8080/cm/lookup/localhost-orcl-MDM_SAMPLE/
object/IsOdiParentOf/rowidRelType",
                "rel": "list"
              }
            ],
            "object": "RboRelType",
            "key": "rowidObject",
            "value": "displayName"
          }
        }
      ],
      "allowedValues": [
        "1"
      ],
      "name": "rowidHierarchy",
      "label": "Rowid Hierarchy",
      "dataType": "String",
      "length": 14,
      "readOnly": false,
      "required": false,
      "system": false,
      "trust": false,
      "applyNullValues": false,
      "displayFormat": "DATETIME_LONG_FORMAT",
      "filterable": true,
      "sortable": true,
      "lookup": {
        "link": [
          {
            "href": "http://localhost:8080/cm/lookup/localhost-orcl-MDM_SAMPLE/id-
label/IsOdiParentOf/rowidHierarchy",
            "rel": "lookup"
          }
        ]
      }
    }
  ]
}
```

```

    },
    {
      "href": "http://localhost:8080/cm/lookup/localhost-orcl-MDM_SAMPLE/
object/IsOdiParentOf/rowidHierarchy",
      "rel": "list"
    }
  ],
  "object": "RboHierarchy",
  "key": "rowidObject",
  "value": "displayName"
}
},
{
  "name": "relName",
  "label": "Rel Name",
  "dataType": "String",
  "length": 50,
  "trust": false,
  "applyNullValues": false,
  "displayFormat": "DATETIME_LONG_FORMAT",
  "filterable": true,
  "sortable": true
},
{
  "name": "relDesc",
  "label": "Rel Desc",
  "dataType": "String",
  "length": 200,
  "trust": false,
  "applyNullValues": false,
  "displayFormat": "DATETIME_LONG_FORMAT",
  "filterable": true,
  "sortable": true
},
{
  "name": "consolidationInd",
  "label": "Consolidation Ind",
  "dataType": "Integer",
  "length": 38,
  "readOnly": true,
  "system": true,
  "trust": false,
  "applyNullValues": false,
  "filterable": true,
  "sortable": true
},
{
  "name": "creator",
  "label": "Creator",
  "dataType": "String",
  "length": 50,
  "readOnly": true,
  "system": true,
  "trust": false,
  "applyNullValues": false,
  "filterable": true,
  "sortable": true
},
{
  "name": "interactionId",
  "label": "Interaction Id",
  "dataType": "Integer",
  "length": 38,
  "readOnly": true,
  "system": true,
  "trust": false,
  "applyNullValues": false,
  "filterable": true,
  "sortable": true
},
{

```

```

    "name": "updatedBy",
    "label": "Updated By",
    "dataType": "String",
    "length": 50,
    "readOnly": true,
    "system": true,
    "trust": false,
    "applyNullValues": false,
    "filterable": true,
    "sortable": true
  },
  {
    "name": "lastUpdateDate",
    "label": "Last Update Date",
    "dataType": "Date",
    "readOnly": true,
    "system": true,
    "trust": false,
    "applyNullValues": false,
    "filterable": true,
    "sortable": true
  },
  {
    "name": "lastRowidSystem",
    "label": "Last Rowid System",
    "dataType": "String",
    "length": 14,
    "readOnly": true,
    "system": true,
    "trust": false,
    "applyNullValues": false,
    "filterable": true,
    "sortable": true
  },
  {
    "name": "dirtyIndicator",
    "label": "Dirty Indicator",
    "dataType": "Integer",
    "length": 38,
    "readOnly": true,
    "system": true,
    "trust": false,
    "applyNullValues": false,
    "filterable": true,
    "sortable": true
  },
  {
    "name": "deletedBy",
    "label": "Deleted By",
    "dataType": "String",
    "length": 50,
    "readOnly": true,
    "system": true,
    "trust": false,
    "applyNullValues": false,
    "filterable": true,
    "sortable": true
  },
  {
    "name": "deletedInd",
    "label": "Deleted Indicator",
    "dataType": "Integer",
    "length": 38,
    "readOnly": true,
    "system": true,
    "trust": false,
    "applyNullValues": false,
    "filterable": true,
    "sortable": true
  },
  {

```



```

    "name": "hubStateInd",
    "label": "Hub State Ind",
    "dataType": "Integer",
    "length": 38,
    "readOnly": true,
    "system": true,
    "trust": false,
    "applyNullValues": false,
    "filterable": true,
    "sortable": true
  },
  {
    "name": "deletedDate",
    "label": "Deleted Date",
    "dataType": "Date",
    "readOnly": true,
    "system": true,
    "trust": false,
    "applyNullValues": false,
    "filterable": true,
    "sortable": true
  },
  {
    "name": "rowidObject",
    "label": "Rowid Object",
    "dataType": "String",
    "length": 14,
    "readOnly": true,
    "system": true,
    "trust": false,
    "applyNullValues": false,
    "filterable": true,
    "sortable": true
  },
  {
    "name": "cmDirtyInd",
    "label": "Content metadata dirty Ind",
    "dataType": "Integer",
    "length": 38,
    "readOnly": true,
    "system": true,
    "trust": false,
    "applyNullValues": false,
    "filterable": true,
    "sortable": true
  },
  {
    "name": "createDate",
    "label": "Create Date",
    "dataType": "Date",
    "readOnly": true,
    "system": true,
    "trust": false,
    "applyNullValues": false,
    "filterable": true,
    "sortable": true
  }
],
"contentMetadata": [
  {
    "operations": {
      "read": {
        "allowed": true
      },
      "create": {
        "allowed": true
      },
      "update": {
        "allowed": true
      },
      "delete": {

```

```

        "allowed":true
      }
    },
    "name":"XREF"
  }
],
"name":"IsOdiParentOf",
"label":"is ODI parent of",
"color":"#990066",
"direction":"ENTITY_1_TO_ENTITY_2",
"bidirectional":false,
"from":{
  "dataType":"BusinessEntity",
  "required":true,
  "lookup":{
    "object":"Organization"
  }
},
"to":{
  "dataType":"BusinessEntity",
  "required":true,
  "lookup":{
    "object":"Organization"
  }
},
"hierarchy":"ODI"
}
],
"operations":{
  "read":{
    "allowed":true
  },
  "update":{
    "allowed":true
  }
},
"root":"Organization",
"name":"ODI"
}

```

## Get Hierarchy Path

The Get Hierarchy Paths REST API returns the paths from a business entity record to the hierarchy root.

The API uses the GET method.

### Request URL

The Get Hierarchy Paths URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/hierarchy/<hierarchy name>/entity/<entity name>/<entity ID>/path
```

Make the following HTTP GET request to the Get Hierarchy Paths URL:

```
GET http://<host>:<port>/<context>/<database ID>/hierarchy/<hierarchy name>/entity/
<entity name>/<entity ID>/path
```

## Query Parameters

You can append query parameters to the request URL to filter the relationships.

The following table describes the query parameters:

Parameter	Description
effectiveDate	Date for which you want to retrieve the relationships.
interactionId	ID of the interaction.
readLabelsOnly	Indicates whether to return only labels in the result. Values are <code>true</code> or <code>false</code> .
readSystemFields	Indicates whether to return the system fields in the result. Values are <code>true</code> or <code>false</code> .
recordsToReturn	Specifies the number of rows to return.
rejectInteractionId	ID of the interaction for rejecting changes.
relationshipType	Comma-separated list of relationship types. For example, the <code>relationshipType=Employee,Employer</code> list returns related records of the <code>Employee</code> and <code>Employer</code> relationship types.
returnTotal	Returns the number of records in the result set. Set to <code>true</code> to get the number of records in the result set.
rootId	ID of the hierarchy root.

## Sample API Request

The following sample request lists the paths from a business entity record to the hierarchy root:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/hierarchy/ODI/entity/
Organization/35/path
```

## Sample API Response

The following sample response shows the paths from the business entity record to the hierarchy root:

```
{
  "link": [],
  "item": [
    {
      "businessEntity": {
        "Organization": {
          "link": [
            {
              "href": "http://localhost:8080/cmx/request/hm_icons/hierarchymanager/
Hospital/Hospital.png?ors=localhost-orcl-MDM_SAMPLE",
              "rel": "icon"
            },
            {
              "href": "http://localhost:8080/cmx/cs/localhost-orcl-MDM_SAMPLE/
Organization/584",
              "rel": "self"
            }
          ]
        }
      },
      "rowidObject": "584",
      "label": "Time Warner Inc",
      "partyType": "Organization",
      "displayName": "Time Warner Inc",
    }
  ]
}
```

```

        "dunsNumber": "799527630"
    }
},
"entityLabel": "Time Warner Inc",
"entityType": "Organization",
"depth": 2,
"object": {
    "businessEntity": {
        "Organization": {
            "link": [
                {
                    "href": "http://localhost:8080/cmx/request/hm_icons/hierarchymanager/
Hospital/Hospital.png?ors=localhost-orcl-MDM_SAMPLE",
                    "rel": "icon"
                },
                {
                    "href": "http://localhost:8080/cmx/cs/localhost-orcl-MDM_SAMPLE/
Organization/55",
                    "rel": "self"
                }
            ],
            "rowidObject": "55",
            "label": "Historic TW Inc",
            "partyType": "Organization",
            "displayName": "Historic TW Inc",
            "dunsNumber": "958466278"
        }
    },
    "entityLabel": "Historic TW Inc",
    "relationshipLabel": "is ODI parent of",
    "relationship": {
        "rowidObject": "834",
        "label": "is ODI parent of",
        "rowidRelType": "2",
        "rowidHierarchy": "1",
        "relName": "Parent",
        "relDesc": "Parent",
        "from": {
            "rowidObject": "584"
        },
        "to": {
            "rowidObject": "55"
        }
    },
    "entityType": "Organization",
    "relationshipType": "IsOdiParentOf",
    "object": {
        "businessEntity": {
            "Organization": {
                "link": [
                    {
                        "href": "http://localhost:8080/cmx/request/hm_icons/hierarchymanager/
Hospital/Hospital.png?ors=localhost-orcl-MDM_SAMPLE",
                        "rel": "icon"
                    },
                    {
                        "href": "http://localhost:8080/cmx/cs/localhost-orcl-MDM_SAMPLE/
Organization/35",
                        "rel": "self"
                    }
                ],
                "rowidObject": "35",
                "effectivePeriod": {
                },
                "label": "People Magazine",
                "partyType": "Organization",
                "displayName": "People Magazine",
                "dunsNumber": "011584096"
            }
        }
    },
},

```

```

    "entityLabel": "People Magazine",
    "relationshipLabel": "is ODI parent of",
    "relationship": {
      "rowidObject": "889",
      "label": "is ODI parent of",
      "rowidRelType": "2",
      "rowidHierarchy": "1",
      "relName": "Parent",
      "relDesc": "Parent",
      "from": {
        "rowidObject": "55"
      },
      "to": {
        "rowidObject": "35"
      }
    },
    "entityType": "Organization",
    "relationshipType": "IsOdiParentOf"
  }
}
]
}

```

## Get Parents

The Get Parents REST API returns the direct parent relationships for a business entity record.

The API uses the GET method.

### Request URL

The Get Parents URL has the following format:

```

http://<host>:<port>/<context>/<database ID>/hierarchy/<hierarchy name>/entity/<entity
name>/<entity ID>/parent

```

Make the following HTTP GET request to the Get Parents URL:

```

GET http://<host>:<port>/<context>/<database ID>/hierarchy/<hierarchy name>/entity/
<entity name>/<entity ID>/parent

```

### Query Parameters

You can append query parameters to the request URL to filter the relationships.

The following table describes the query parameters:

Parameter	Description
effectiveDate	Date for which you want to retrieve the relationships.
interactionId	ID of the interaction.
readLabelsOnly	Indicates whether to return only labels in the result. Values are <code>true</code> or <code>false</code> .
readSystemFields	Indicates whether to return the system fields in the result. Values are <code>true</code> or <code>false</code> .
recordsToReturn	Specifies the number of rows to return.
rejectInteractionId	ID of the interaction for rejecting changes.

Parameter	Description
relationshipType	Comma-separated list of relationship types. For example, the <code>relationshipType=Employee,Employer</code> list returns related records of the <code>Employee</code> and <code>Employer</code> relationship types.
returnTotal	Returns the number of records in the result set. Set to <code>true</code> to get the number of records in the result set.
rootId	ID of the hierarchy root.

## Sample API Request

The following sample request lists the direct parent relationships for a business entity record:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/hierarchy/ODI/entity/
Organization/55/parent
```

## Sample API Response

The following sample response shows the direct parent relationships for a business entity record:

```
{
  "link": [],
  "firstRecord": 1,
  "pageSize": 10,
  "searchToken": "SVR1.1G7VH",
  "relatedEntity": [
    {
      "businessEntity": {
        "Organization": {
          "link": [
            {
              "href": "http://localhost:8080/cmx/cs/localhost-orcl-MDM_SAMPLE/
Organization/584",
              "rel": "self"
            },
            {
              "href": "http://localhost:8080/cmx/request/hm_icons/hierarchymanager/
Hospital/Hospital.png?ors=localhost-orcl-MDM_SAMPLE",
              "rel": "icon"
            }
          ]
        },
        "rowidObject": "584",
        "label": "Time Warner Inc",
        "partyType": "Organization",
        "displayName": "Time Warner Inc",
        "dunsNumber": "799527630"
      }
    },
    {
      "entityLabel": "Time Warner Inc",
      "relationshipLabel": "is ODI parent of",
      "relationship": {
        "rowidObject": "834",
        "label": "is ODI parent of",
        "rowidRelType": "2",
        "rowidHierarchy": "1",
        "relName": "Parent",
        "relDesc": "Parent",
        "from": {
          "rowidObject": "584"
        },
        "to": {
          "rowidObject": "55"
        }
      }
    }
  ]
}
```

```

    },
    "entityType": "Organization",
    "relationshipType": "IsOdiParentOf"
  }
]
}

```

## Get Children

The Get Children REST API returns the children relationships for a business entity record.

The API uses the GET method.

### Request URL

The Get Children URL has the following format:

```

http://<host>:<port>/<context>/<database ID>/hierarchy/<hierarchy name>/entity/<entity
name>/<entity ID>/children

```

Make the following HTTP GET request to the Get Children URL:

```

GET http://<host>:<port>/<context>/<database ID>/hierarchy/<hierarchy name>/entity/
<entity name>/<entity ID>/children

```

### Query Parameters

You can append query parameters to the request URL to filter the relationships.

The following table describes the query parameters:

Parameter	Description
effectiveDate	Date for which you want to retrieve the relationships.
interactionId	ID of the interaction.
readLabelsOnly	Indicates whether to return only labels in the result. Values are <code>true</code> or <code>false</code> .
readSystemFields	Indicates whether to return the system fields in the result. Values are <code>true</code> or <code>false</code> .
recordsToReturn	Specifies the number of rows to return.
rejectInteractionId	ID of the interaction for rejecting changes.
relationshipType	Comma-separated list of relationship types. For example, the <code>relationshipType=Employee,Employer</code> list returns related records of the <code>Employee</code> and <code>Employer</code> relationship types.
returnTotal	Returns the number of records in the result set. Set to <code>true</code> to get the number of records in the result set.
rootId	ID of the hierarchy root.

## Sample API Request

The following sample request lists the children relationships for a business entity record:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/hierarchy/ODI/entity/
Organization/55/children
```

## Sample API Response

The following sample response shows the children relationships for a business entity record:

```
{
  "link": [],
  "firstRecord": 1,
  "pageSize": 10,
  "searchToken": "SVR1.1G7VF",
  "relatedEntity": [
    {
      "businessEntity": {
        "organization": {
          "link": [
            {
              "href": "http://localhost:8080/cmx/request/hm_icons/hierarchymanager/
Hospital/Hospital.png?ors=localhost-orcl-MDM_SAMPLE",
              "rel": "icon"
            },
            {
              "href": "http://localhost:8080/cmx/cs/localhost-orcl-MDM_SAMPLE/
Organization/593",
              "rel": "self"
            }
          ]
        },
        "rowidObject": "593",
        "label": "Turner Broadcasting System Inc",
        "partyType": "Organization",
        "displayName": "Turner Broadcasting System Inc",
        "dunsNumber": "003319068"
      }
    },
    {
      "entityLabel": "Turner Broadcasting System Inc",
      "relationshipLabel": "is ODI parent of",
      "relationship": {
        "rowidObject": "887",
        "label": "is ODI parent of",
        "rowidRelType": "2",
        "rowidHierarchy": "1",
        "relName": "Parent",
        "relDesc": "Parent",
        "from": {
          "rowidObject": "55"
        },
        "to": {
          "rowidObject": "593"
        }
      }
    },
    {
      "entityType": "Organization",
      "relationshipType": "IsOdiParentOf"
    }
  ],
  {
    "businessEntity": {
      "organization": {
        "link": [
          {
            "href": "http://localhost:8080/cmx/request/hm_icons/hierarchymanager/
Hospital/Hospital.png?ors=localhost-orcl-MDM_SAMPLE",
            "rel": "icon"
          },
          {
            "href": "http://localhost:8080/cmx/cs/localhost-orcl-MDM_SAMPLE/
Organization/414",
            "rel": "self"
          }
        ]
      }
    }
  }
}
```



```

        "rel":"self"
    }
    ],
    "rowidObject":"414",
    "label":"Historic TW Inc",
    "partyType":"Organization",
    "displayName":"Historic TW Inc",
    "dunsNumber":"007305290"
}
},
"entityLabel":"Historic TW Inc",
"relationshipLabel":"is ODI parent of",
"relationship":{
    "rowidObject":"888",
    "label":"is ODI parent of",
    "rowidRelType":"2",
    "rowidHierarchy":"1",
    "relName":"HQ",
    "relDesc":"HQ",
    "from":{
        "rowidObject":"55"
    },
    "to":{
        "rowidObject":"414"
    }
}
},
"entityType":"Organization",
"relationshipType":"IsOdiParentOf"
},
{
    "businessEntity":{
        "Organization":{
            "link":[
                {
                    "href":"http://localhost:8080/cmxcsllocalhost-orcl-MDM_SAMPLE/
Organization/35",
                    "rel":"self"
                },
                {
                    "href":"http://localhost:8080/cmxcslrequest/hm_icons/hierarchymanager/
Hospital/Hospital.png?ors=localhost-orcl-MDM_SAMPLE",
                    "rel":"icon"
                }
            ],
            "rowidObject":"35",
            "label":"People Magazine",
            "partyType":"Organization",
            "displayName":"People Magazine",
            "dunsNumber":"011584096"
        }
    },
    "entityLabel":"People Magazine",
    "relationshipLabel":"is ODI parent of",
    "relationship":{
        "rowidObject":"889",
        "label":"is ODI parent of",
        "rowidRelType":"2",
        "rowidHierarchy":"1",
        "relName":"Parent",
        "relDesc":"Parent",
        "from":{
            "rowidObject":"55"
        },
        "to":{
            "rowidObject":"35"
        }
    }
},
"entityType":"Organization",
"relationshipType":"IsOdiParentOf"
},
{

```

```

    "businessEntity":{
      "Organization":{
        "link":[
          {
            "href":"http://localhost:8080/cmx/cs/localhost-orcl-MDM_SAMPLE/
Organization/391",
            "rel":"self"
          },
          {
            "href":"http://localhost:8080/cmx/request/hm_icons/hierarchymanager/
Hospital/Hospital.png?ors=localhost-orcl-MDM_SAMPLE",
            "rel":"icon"
          }
        ],
        "rowidObject":"391",
        "label":"Historic TW Inc",
        "partyType":"Organization",
        "displayName":"Historic TW Inc",
        "dunsNumber":"011816704"
      }
    },
    "entityLabel":"Historic TW Inc",
    "relationshipLabel":"is ODI parent of",
    "relationship":{
      "rowidObject":"890",
      "label":"is ODI parent of",
      "rowidRelType":"2",
      "rowidHierarchy":"1",
      "relName":"HQ",
      "relDesc":"HQ",
      "from":{
        "rowidObject":"55"
      },
      "to":{
        "rowidObject":"391"
      }
    },
    "entityType":"Organization",
    "relationshipType":"IsOdiParentOf"
  },
  {
    "businessEntity":{
      "Organization":{
        "link":[
          {
            "href":"http://localhost:8080/cmx/cs/localhost-orcl-MDM_SAMPLE/
Organization/448",
            "rel":"self"
          },
          {
            "href":"http://localhost:8080/cmx/request/hm_icons/hierarchymanager/
Hospital/Hospital.png?ors=localhost-orcl-MDM_SAMPLE",
            "rel":"icon"
          }
        ],
        "rowidObject":"448",
        "label":"Historic TW Inc",
        "partyType":"Organization",
        "displayName":"Historic TW Inc",
        "dunsNumber":"069110711"
      }
    },
    "entityLabel":"Historic TW Inc",
    "relationshipLabel":"is ODI parent of",
    "relationship":{
      "rowidObject":"891",
      "label":"is ODI parent of",
      "rowidRelType":"2",
      "rowidHierarchy":"1",
      "relName":"HQ",
      "relDesc":"HQ",

```



```

    }
  },
  "entityLabel": "Historic TW Inc",
  "relationshipLabel": "is ODI parent of",
  "relationship": {
    "rowidObject": "893",
    "label": "is ODI parent of",
    "rowidRelType": "2",
    "rowidHierarchy": "1",
    "relName": "HQ",
    "relDesc": "HQ",
    "from": {
      "rowidObject": "55"
    },
    "to": {
      "rowidObject": "349"
    }
  },
  "entityType": "Organization",
  "relationshipType": "IsOdiParentOf"
},
{
  "businessEntity": {
    "Organization": {
      "link": [
        {
          "href": "http://localhost:8080/cmx/request/hm_icons/hierarchymanager/Hospital/Hospital.png?ors=localhost-orcl-MDM_SAMPLE",
          "rel": "icon"
        },
        {
          "href": "http://localhost:8080/cmx/cs/localhost-orcl-MDM_SAMPLE/Organization/298",
          "rel": "self"
        }
      ],
      "rowidObject": "298",
      "label": "WF Cinema Holdings LP",
      "partyType": "Organization",
      "displayName": "WF Cinema Holdings LP",
      "dunsNumber": "075408711"
    }
  },
  "entityLabel": "WF Cinema Holdings LP",
  "relationshipLabel": "is ODI parent of",
  "relationship": {
    "rowidObject": "894",
    "label": "is ODI parent of",
    "rowidRelType": "2",
    "rowidHierarchy": "1",
    "relName": "Parent",
    "relDesc": "Parent",
    "from": {
      "rowidObject": "55"
    },
    "to": {
      "rowidObject": "298"
    }
  },
  "entityType": "Organization",
  "relationshipType": "IsOdiParentOf"
},
{
  "businessEntity": {
    "Organization": {
      "link": [
        {
          "href": "http://localhost:8080/cmx/request/hm_icons/hierarchymanager/Hospital/Hospital.png?ors=localhost-orcl-MDM_SAMPLE",
          "rel": "icon"
        }
      ],

```

```

        {
          "href":"http://localhost:8080/cmxc/cs/localhost-orcl-MDM_SAMPLE/
Organization/596",
          "rel":"self"
        }
      ],
      "rowidObject":"596",
      "label":"Historic TW Inc",
      "partyType":"Organization",
      "displayName":"Historic TW Inc",
      "dunsNumber":"076749246"
    }
  },
  "entityLabel":"Historic TW Inc",
  "relationshipLabel":"is ODI parent of",
  "relationship":{
    "rowidObject":"895",
    "label":"is ODI parent of",
    "rowidRelType":"2",
    "rowidHierarchy":"1",
    "relName":"HQ",
    "relDesc":"HQ",
    "from":{
      "rowidObject":"55"
    },
    "to":{
      "rowidObject":"596"
    }
  },
  "entityType":"Organization",
  "relationshipType":"IsOdiParentOf"
},
{
  "businessEntity":{
    "Organization":{
      "link":[
        {
          "href":"http://localhost:8080/cmxc/request/hm_icons/hierarchymanager/
Hospital/Hospital.png?ors=localhost-orcl-MDM_SAMPLE",
          "rel":"icon"
        },
        {
          "href":"http://localhost:8080/cmxc/cs/localhost-orcl-MDM_SAMPLE/
Organization/699",
          "rel":"self"
        }
      ]
    },
    "rowidObject":"699",
    "label":"Historic TW Inc",
    "partyType":"Organization",
    "displayName":"Historic TW Inc",
    "dunsNumber":"083115568"
  }
},
"entityLabel":"Historic TW Inc",
"relationshipLabel":"is ODI parent of",
"relationship":{
  "rowidObject":"896",
  "label":"is ODI parent of",
  "rowidRelType":"2",
  "rowidHierarchy":"1",
  "relName":"HQ",
  "relDesc":"HQ",
  "from":{
    "rowidObject":"55"
  },
  "to":{
    "rowidObject":"699"
  }
},
"entityType":"Organization",

```

```

    "relationshipType": "IsOdiParentOf"
  }
]
}

```

## Export Hierarchy

The Export Hierarchy REST API exports a hierarchy in CSV format.

The API uses the GET method.

### Request URL

The Export Hierarchy URL has the following format:

```

http://<host>:<port>/<context>/<database ID>/hierarchy/<hierarchy name>/entity/<entity
name>/<entity ID>/exportHierarchy

```

Make the following HTTP GET request to the Export Hierarchy URL:

```

GET http://<host>:<port>/<context>/<database ID>/hierarchy/<hierarchy name>/entity/
<entity name>/<entity ID>/exportHierarchy

```

### Query Parameters

You can append query parameters to the request URL to filter the relationships.

The following table describes the query parameters:

Parameter	Description
effectiveDate	Date for which you want to retrieve the relationships.
interactionId	ID of the interaction.
readLabelsOnly	Indicates whether to return only labels in the result. Values are <code>true</code> or <code>false</code> .
readSystemFields	Indicates whether to return the system fields in the result. Values are <code>true</code> or <code>false</code> .
recordsToReturn	Specifies the number of rows to return.
rejectInteractionId	ID of the interaction for rejecting changes.
relationshipType	Comma-separated list of relationship types. For example, the <code>relationshipType=Employee,Employer</code> list returns related records of the <code>Employee</code> and <code>Employer</code> relationship types.
returnTotal	Returns the number of records in the result set. Set to <code>true</code> to get the number of records in the result set.
rootId	ID of the hierarchy root.

### Sample API Request

The following sample request exports the hierarchy for a business entity record:

```

GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/hierarchy/ODI/entity/
Organization/584/exportHierarchy

```

## Sample API Response

The following sample response shows the exported hierarchy in the CSV format:

```
Level,Business Entity,ID,Label,Parent ID,Parent Label,Type of Relationship to
Parent,issuingCompany,expirationYear,accountType,accountNumber,securityCode,expirationMon
th,cardholderName,productType,productNumber,productName,inceptionDate,productDesc,groupTy
pe,groupName,partyType,lastName,displayName,middleName,birthdate,firstName,dunsNumber
Root,Organization,584,Time Warner Inc,,,,,,,,,,,,,Organization,,Time Warner Inc,,,,
799527630
1,Organization,55,Historic TW Inc,584,Time Warner Inc,is ODI parent
of,,,,,,,,,,,,,Organization,,Historic TW Inc,,,,958466278
1,Organization,206,Courtroom Television Network LLC,584,Time Warner Inc,is ODI parent
of,,,,,,,,,,,,,Organization,,Courtroom Television Network LLC,,,,043905707
1,Organization,674,Rebellion Pictures LLC,584,Time Warner Inc,is ODI parent
of,,,,,,,,,,,,,Organization,,Rebellion Pictures LLC,,,,557414278
1,Organization,881,"Time Warner Cable Programming, Inc",584,Time Warner Inc,is ODI
parent of,,,,,,,,,,,,,Organization,,,"Time Warner Cable Programming, Inc",,,,,787474949
...
```

## Export Direct Children and Parents

The Export Direct Children and Parents REST API exports the direct children and parent relationships for a business entity record in CSV format.

The API uses the GET method.

### Request URL

The Export Direct Children and Parents URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/hierarchy/<hierarchy name>/entity/<entity
name>/<entity ID>/exportRelated
```

Make the following HTTP GET request to the Export Direct Children and Parents URL:

```
GET http://<host>:<port>/<context>/<database ID>/hierarchy/<hierarchy name>/entity/
<entity name>/<entity ID>/exportRelated
```

### Query Parameters

You can append query parameters to the request URL to filter the relationships.

The following table describes the query parameters:

Parameter	Description
effectiveDate	Date for which you want to retrieve the relationships.
interactionId	ID of the interaction.
readLabelsOnly	Indicates whether to return only labels in the result. Values are true or false.
readSystemFields	Indicates whether to return the system fields in the result. Values are true or false.
recordsToReturn	Specifies the number of rows to return.
rejectInteractionId	ID of the interaction for rejecting changes.

Parameter	Description
relationshipType	Comma-separated list of relationship types. For example, the relationshipType=Employee,Employer list returns related records of the Employee and Employer relationship types.
returnTotal	Returns the number of records in the result set. Set to true to get the number of records in the result set.
rootId	ID of the hierarchy root.

## Sample API Request

The following sample request exports the direct children and parent relationships for a business entity record:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/hierarchy/ODI/entity/
Organization/55/exportRelated
```

## Sample API Response

The following sample response shows the exported direct children and parent relationships for a business entity record in CSV format:

```
Level,Business Entity,ID,Label,Parent ID,Parent Label,Type of Relationship to
Parent,issuingCompany,expirationYear,accountType,accountNumber,securityCode,expirationMon
th,cardholderName,productType,productNumber,productName,inceptionDate,productDesc,groupTy
pe,groupName,partyType,lastName,displayName,middleName,birthdate,firstName,dunsNumber
Root,Organization,584,Time Warner Inc,,,,,,,,,,,,,Organization,,Time Warner Inc,,,,
799527630
1,Organization,55,Historic TW Inc,584,Time Warner Inc,is ODI parent
of,,,,,,,,,,,,,Organization,,Historic TW Inc,,,,958466278
2,Organization,593,Turner Broadcasting System Inc,55,Historic TW Inc,is ODI parent
of,,,,,,,,,,,,,Organization,,Turner Broadcasting System Inc,,,,003319068
2,Organization,414,Historic TW Inc,55,Historic TW Inc,is ODI parent
of,,,,,,,,,,,,,Organization,,Historic TW Inc,,,,007305290
2,Organization,35,People Magazine,55,Historic TW Inc,is ODI parent
of,,,,,,,,,,,,,Organization,,People Magazine,,,,011584096
2,Organization,391,Historic TW Inc,55,Historic TW Inc,is ODI parent
of,,,,,,,,,,,,,Organization,,Historic TW Inc,,,,011816704
...
```

## Get Hierarchy Changes

The Get Hierarchy Changes API retrieves pending changes to a hierarchy.

The API uses the GET method.

### Request URL

The Get Hierarchy Changes URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/hierarchy/{hierarchy name}/changes
```

Make the following HTTP GET request to the Get Hierarchy Changes URL:

```
GET http://<host>:<port>/<context>/<database ID>/hierarchy/{hierarchy name}/changes
```



## Query Parameters

You can append query parameters to the request URL to filter the relationships.

The following table describes the query parameters:

Parameter	Description
effectiveDate	Date for which you want to retrieve the relationships.
interactionId	ID of the interaction.
readLabelsOnly	Indicates whether to return only labels in the result. Values are <code>true</code> or <code>false</code> .
readSystemFields	Indicates whether to return the system fields in the result. Values are <code>true</code> or <code>false</code> .
recordsToReturn	Specifies the number of rows to return.
rejectInteractionId	ID of the interaction for rejecting changes.
relationshipType	Comma-separated list of relationship types. For example, the <code>relationshipType=Employee,Employer</code> list returns related records of the <code>Employee</code> and <code>Employer</code> relationship types.
returnTotal	Returns the number of records in the result set. Set to <code>true</code> to get the number of records in the result set.
rootId	ID of the hierarchy root.

## Sample API Request

The following request returns pending changes to a hierarchy filtered by interaction ID, root ID, and rejection interaction ID:

```
GET http://localhost:8080/cmx/bulk/localhost-orcl-DS_UI1/hierarchy/Product/changes?
interactionId=480003&rootId=165&rejectInteractionId=480004
```

## Sample API Response

The following sample response shows the pending changes:

```
{
  "interactionId": "480003",
  "rejectInteractionId": "480004",
  "type": "hierarchy",
  "name": "Product",
  "objects": [
    {
      "before": [
      ],
      "after": [
        {
          "businessEntity": {
            "ProductGroup": {
              "link": [
                {
                  "href": "http://localhost:8080/cmx/request/hm_icons/hierarchymanager/
Group/Group.png?ors=localhost-orcl-MDM_SAMPLE",
                  "rel": "icon"
                }
              ]
            }
          }
        }
      ],
    }
  ]
}
```

```

        "rowidObject": "165",
        "creator": "admin",
        "createDate": "2020-01-13T13:07:35.128-05:00",
        "updatedBy": "admin",
        "lastUpdateDate": "2020-01-13T13:07:35.128-05:00",
        "consolidationInd": 4,
        "lastRowidSystem": "PRODUCT",
        "hubStateInd": 1,
        "label": "Vehicles",
        "productType": "Product Group",
        "productName": "Vehicles"
    },
    {
        "entityLabel": "Vehicles",
        "entityType": "ProductGroup",
        "depth": 1,
        "object": {
            "businessEntity": {
                "ProductGroup": {
                    "link": [
                        {
                            "href": "http://localhost:8080/cmz/request/hm_icons/hierarchymanager/Group/Group.png?ors=localhost-orcl-MDM_SAMPLE",
                            "rel": "icon"
                        }
                    ]
                }
            },
            "rowidObject": "166",
            "label": "Scooter",
            "productType": "Product Group",
            "productName": "Scooter"
        }
    },
    {
        "entityLabel": "Scooter",
        "relationshipLabel": "Product Group is parent of Product Group",
        "relationship": {
            "rowidObject": "124",
            "creator": "datasteward",
            "createDate": "2020-01-13T13:07:35.864-05:00",
            "updatedBy": "datasteward",
            "lastUpdateDate": "2020-01-13T13:07:35.865-05:00",
            "consolidationInd": 4,
            "lastRowidSystem": "PRODUCT",
            "interactionId": "480003",
            "hubStateInd": 0,
            "label": "Product Group is parent of Product Group",
            "rowidRelType": "7",
            "rowidHierarchy": "3",
            "from": {
                "rowidObject": "165"
            },
            "to": {
                "rowidObject": "166"
            }
        }
    },
    {
        "entityType": "ProductGroup",
        "relationshipType": "ProductGroupIsParentOfProductGroup"
    }
},
{
    "businessEntity": {
        "ProductGroup": {
            "link": [
                {
                    "href": "http://localhost:8080/cmz/request/hm_icons/hierarchymanager/Group/Group.png?ors=localhost-orcl-MDM_SAMPLE",
                    "rel": "icon"
                }
            ]
        },
        "rowidObject": "165",
        "creator": "admin",
        "createDate": "2020-01-13T13:07:35.128-05:00",

```

```

        "updatedBy": "admin",
        "lastUpdateDate": "2020-01-13T13:07:35.128-05:00",
        "consolidationInd": 4,
        "lastRowidSystem": "PRODUCT      ",
        "hubStateInd": 1,
        "label": "Vehicles",
        "productType": "Product Group",
        "productName": "Vehicles"
    }
},
"entityLabel": "Vehicles",
"entityType": "ProductGroup",
"depth": 2,
"object": {
    "businessEntity": {
        "ProductGroup": {
            "link": [
                {
                    "href": "http://localhost:8080/cmx/request/hm_icons/hierarchymanager/
Group/Group.png?ors=localhost-orcl-MDM_SAMPLE",
                    "rel": "icon"
                }
            ]
        },
        "rowidObject": "166      ",
        "creator": "admin",
        "createDate": "2020-01-13T13:07:35.250-05:00",
        "updatedBy": "admin",
        "lastUpdateDate": "2020-01-13T13:07:35.250-05:00",
        "consolidationInd": 4,
        "lastRowidSystem": "PRODUCT      ",
        "hubStateInd": 1,
        "label": "Scooter",
        "productType": "Product Group",
        "productName": "Scooter"
    }
},
"entityLabel": "Scooter",
"relationshipLabel": "Product Group is parent of Product Group",
"relationship": {
    "rowidObject": "124      ",
    "creator": "datasteward",
    "createDate": "2020-01-13T13:07:35.864-05:00",
    "updatedBy": "datasteward",
    "lastUpdateDate": "2020-01-13T13:07:35.865-05:00",
    "consolidationInd": 4,
    "lastRowidSystem": "PRODUCT      ",
    "interactionId": "480003",
    "hubStateInd": 0,
    "label": "Product Group is parent of Product Group",
    "rowidRelType": "7      ",
    "rowidHierarchy": "3      ",
    "from": {
        "rowidObject": "165      "
    },
    "to": {
        "rowidObject": "166      "
    }
},
"entityType": "ProductGroup",
"relationshipType": "ProductGroupIsParentOfProductGroup",
"object": {
    "businessEntity": {
        "ProductGroup": {
            "link": [
                {
                    "href": "http://localhost:8080/cmx/request/hm_icons/
hierarchymanager/Group/Group.png?ors=localhost-orcl-MDM_SAMPLE",
                    "rel": "icon"
                }
            ]
        },
        "rowidObject": "167      ",

```

```

        "label": "E-Scooter",
        "productType": "Product Group",
        "productName": "E-Scooter"
    }
},
"entityLabel": "E-Scooter",
"relationshipLabel": "Product Group is parent of Product Group",
"relationship": {
    "rowidObject": "125",
    "creator": "datasteward",
    "createDate": "2020-01-13T13:07:36.033-05:00",
    "updatedBy": "datasteward",
    "lastUpdateDate": "2020-01-13T13:07:36.034-05:00",
    "consolidationInd": 4,
    "lastRowidSystem": "PRODUCT",
    "interactionId": "480003",
    "hubStateInd": 0,
    "label": "Product Group is parent of Product Group",
    "rowidRelType": "7",
    "rowidHierarchy": "3",
    "from": {
        "rowidObject": "166"
    },
    "to": {
        "rowidObject": "167"
    }
},
"entityType": "ProductGroup",
"relationshipType": "ProductGroupIsParentOfProductGroup"
}
}
},
{
    "businessEntity": {
        "ProductGroup": {
            "link": [
                {
                    "href": "http://localhost:8080/cmz/request/hm_icons/hierarchymanager/Group/Group.png?ors=localhost-orcl-MDM_SAMPLE",
                    "rel": "icon"
                }
            ]
        },
        "rowidObject": "165",
        "creator": "admin",
        "createDate": "2020-01-13T13:07:35.128-05:00",
        "updatedBy": "admin",
        "lastUpdateDate": "2020-01-13T13:07:35.128-05:00",
        "consolidationInd": 4,
        "lastRowidSystem": "PRODUCT",
        "hubStateInd": 1,
        "label": "Vehicles",
        "productType": "Product Group",
        "productName": "Vehicles"
    }
},
"entityLabel": "Vehicles",
"entityType": "ProductGroup",
"depth": 3,
"object": {
    "businessEntity": {
        "ProductGroup": {
            "link": [
                {
                    "href": "http://localhost:8080/cmz/request/hm_icons/hierarchymanager/Group/Group.png?ors=localhost-orcl-MDM_SAMPLE",
                    "rel": "icon"
                }
            ]
        },
        "rowidObject": "166",
        "creator": "admin",
        "createDate": "2020-01-13T13:07:35.250-05:00",

```

```

        "updatedBy":"admin",
        "lastUpdateDate":"2020-01-13T13:07:35.250-05:00",
        "consolidationInd":4,
        "lastRowidSystem":"PRODUCT      ",
        "hubStateInd":1,
        "label":"Scooter",
        "productType":"Product Group",
        "productName":"Scooter"
    }
},
"entityLabel":"Scooter",
"relationshipLabel":"Product Group is parent of Product Group",
"relationship":{
    "rowidObject":"124      ",
    "creator":"datasteward",
    "createDate":"2020-01-13T13:07:35.864-05:00",
    "updatedBy":"datasteward",
    "lastUpdateDate":"2020-01-13T13:07:35.865-05:00",
    "consolidationInd":4,
    "lastRowidSystem":"PRODUCT      ",
    "interactionId":"480003",
    "hubStateInd":0,
    "label":"Product Group is parent of Product Group",
    "rowidRelType":"7      ",
    "rowidHierarchy":"3      ",
    "from":{
        "rowidObject":"165      "
    },
    "to":{
        "rowidObject":"166      "
    }
},
"entityType":"ProductGroup",
"relationshipType":"ProductGroupIsParentOfProductGroup",
"object":{
    "businessEntity":{
        "ProductGroup":{
            "link":[
                {
                    "href":"http://localhost:8080/cmz/request/hm_icons/
hierarchymanager/Group/Group.png?ors=localhost-orcl-MDM_SAMPLE",
                    "rel":"icon"
                }
            ],
            "rowidObject":"167      ",
            "creator":"admin",
            "createDate":"2020-01-13T13:07:35.364-05:00",
            "updatedBy":"admin",
            "lastUpdateDate":"2020-01-13T13:07:35.364-05:00",
            "consolidationInd":4,
            "lastRowidSystem":"PRODUCT      ",
            "hubStateInd":1,
            "label":"E-Scooter",
            "productType":"Product Group",
            "productName":"E-Scooter"
        }
    }
},
"entityLabel":"E-Scooter",
"relationshipLabel":"Product Group is parent of Product Group",
"relationship":{
    "rowidObject":"125      ",
    "creator":"datasteward",
    "createDate":"2020-01-13T13:07:36.033-05:00",
    "updatedBy":"datasteward",
    "lastUpdateDate":"2020-01-13T13:07:36.034-05:00",
    "consolidationInd":4,
    "lastRowidSystem":"PRODUCT      ",
    "interactionId":"480003",
    "hubStateInd":0,
    "label":"Product Group is parent of Product Group",
    "rowidRelType":"7      ",

```



## Request URL

The Bulk Relationship Changes URL has the following format:

```
http://<host>:<port>/<context>/<database ID>
```

Make the following HTTP POST request to the Get Hierarchy Changes URL:

```
POST http://<host>:<port>/<context>/<database ID>
```

## Parameters

Specify the type of change you want to perform and the relationship you want to modify.

The following table describes the parameters in the request body:

Parameter	Description
operation	Type of change you want to perform. Values are <code>createRelationship</code> , <code>updateRelationship</code> , and <code>deleteRelationship</code> .
relationship	Name of the relationship.
rowidObject	Row ID of the object.
startDate	Optional. Specifies the date from which the record is effective. Provide this parameters for a timeline-enabled base object.
endDate	Optional. Specifies the date from which the record is no longer effective. Provide this parameters for a timeline-enabled base object.

## Sample API Request

The following request creates new relationships:

```
POST http://localhost:8080/cmxbulk/localhost-orcl-DS_UI1

{
  "systemName": "Product",
  "rootRowId": "165",
  "items": [
    {
      "operation": "createRelationship",
      "relationship": "ProductGroupIsParentOfProductGroup",
      "payload": {
        "from": {
          "rowidObject": "165"
        },
        "to": {
          "rowidObject": "166"
        }
      }
    },
    {
      "operation": "createRelationship",
      "relationship": "ProductGroupIsParentOfProductGroup",
      "payload": {
        "from": {
          "rowidObject": "166"
        },
        "to": {
          "rowidObject": "167"
        }
      }
    }
  ]
}
```

```

    {
      "operation": "createRelationship",
      "relationship": "ProductGroupIsParentOfProduct",
      "payload": {
        "from": {
          "rowidObject": "167"
        },
        "to": {
          "rowidObject": "168"
        }
      },
      "effectivePeriod": {
        "startDate": "2019-01-01T11:11:53.974-04:00",
        "endDate": "2039-12-31T11:11:53.974-04:00"
      }
    }
  ]
}

```

## Sample API Response

The following sample response shows the interaction ID associated to the changes, which you can use to promote and reject changes:

```

{
  "processId": "14068",
  "interactionId": "480003",
  "rejectInteractionId": "480004",
  "items": [
    {
      "payload": {
        "key": {
          "rowid": "124",
          "sourceKey": "SVR1.1G9AG"
        },
        "rowidObject": "124",
        "from": {
          "key": {
            "rowid": "165"
          },
          "rowidObject": "165"
        },
        "to": {
          "key": {
            "rowid": "166"
          },
          "rowidObject": "166"
        }
      }
    },
    {
      "payload": {
        "key": {
          "rowid": "125",
          "sourceKey": "SVR1.1G9AH"
        },
        "rowidObject": "125",
        "from": {
          "key": {
            "rowid": "166"
          },
          "rowidObject": "166"
        },
        "to": {
          "key": {
            "rowid": "167"
          },
          "rowidObject": "167"
        }
      }
    }
  ]
}

```



```

    }
  },
  {
    "payload":{
      "key":{
        "rowid":"126",
        "sourceKey":"SVR1.1G9AI"
      },
      "rowidObject":"126",
      "from":{
        "key":{
          "rowid":"167"
        },
        "rowidObject":"167"
      },
      "to":{
        "key":{
          "rowid":"168"
        },
        "rowidObject":"168"
      }
    }
  }
]
}

```

## Bulk Promote

The Bulk Promote REST API promotes changes to the network or hierarchy.

The API uses the POST method.

### Request URL

The Bulk Promote URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/promote
```

Make the following HTTP GET request to the Bulk Promote URL:

```
POST http://<host>:<port>/<context>/<database ID>/promote
```

### Sample API Request

The following sample request promotes changes:

```

POST http://localhost:8080/cmx/bulk/localhost-orcl-DS_UI1/promote
{
  "interactionId":"67080007",
  "rejectInteractionId":"67080008",
  "objects":[
    {
      "type":"Hierarchy",
      "name":"HPerson"
    }
  ]
}

```

### Sample API Response

The following sample response shows the response after successfully promoting changes:

```

{
  "interactionId": "68520005",
  "rejectInteractionId": "68520006",
  "type": "hierarchy",

```

```

"name": "HPerson",
"objects": [
  {
    "before": [
      {
        "businessEntity": {
          "Person": {
            "link": [
              {
                "href": "http://localhost:8080/cmx/request/hm_icons/
hierarchymanager/Person/Person_Small.png?ors=localhost-mdm103-DS_UI2",
                "rel": "icon"
              }
            ],
            "rowidObject": "2568254",
            "creator": "admin",
            "createDate": "2020-04-01T14:38:06.577-04:00",
            "updatedBy": "admin",
            "lastUpdateDate": "2020-04-01T14:38:06.577-04:00",
            "consolidationInd": 4,
            "lastRowidSystem": "SFA",
            "hubStateInd": 1,
            "effectivePeriod": {},
            "label": "LN, FN",
            "partyType": "Person",
            "lastName": "LN",
            "displayName": "FN LN",
            "generationSuffixCd": "X",
            "firstName": "FN"
          }
        },
        "entityLabel": "LN, FN",
        "entityType": "Person",
        "depth": 0
      }
    ],
    "after": [
      {
        "businessEntity": {
          "Person": {
            "link": [
              {
                "href": "http://localhost:8080/cmx/request/hm_icons/
hierarchymanager/Person/Person_Small.png?ors=localhost-mdm103-DS_UI2",
                "rel": "icon"
              }
            ],
            "rowidObject": "2568253",
            "creator": "admin",
            "createDate": "2020-04-01T14:38:03.956-04:00",
            "updatedBy": "admin",
            "lastUpdateDate": "2020-04-01T14:38:03.956-04:00",
            "consolidationInd": 4,
            "lastRowidSystem": "SFA",
            "hubStateInd": 1,
            "label": "LN, FN",
            "partyType": "Person",
            "lastName": "LN",
            "displayName": "FN LN",
            "generationSuffixCd": "X",
            "firstName": "FN"
          }
        },
        "entityLabel": "Person",
        "entityType": "Person",
        "depth": 1,
        "object": {
          "businessEntity": {
            "Automobile": {
              "rowidObject": "1450063",
              "creator": "admin",

```

```

        "createDate": "2020-04-01T14:38:09.630-04:00",
        "updatedBy": "admin",
        "lastUpdateDate": "2020-04-01T14:38:09.630-04:00",
        "consolidationInd": 4,
        "lastRowidSystem": "SFA",
        "hubStateInd": 1,
        "effectivePeriod": {},
        "label": "Subaru",
        "model": "MODEL",
        "drivetrainCode": "4WD",
        "doorsCode": "2DR",
        "make": "Subaru"
    },
    "entityLabel": "Subaru",
    "relationshipLabel": "PersonToAutomobile Relationship",
    "relationship": {
        "rowidObject": "1450083",
        "creator": "ds1",
        "createDate": "2020-04-01T14:40:14.921-04:00",
        "updatedBy": "admin",
        "lastUpdateDate": "2020-04-01T14:40:23.812-04:00",
        "consolidationInd": 4,
        "lastRowidSystem": "SYS0",
        "interactionId": "68520005",
        "hubStateInd": 1,
        "label": "PersonToAutomobile Relationship",
        "from": {
            "rowidObject": "2568253"
        },
        "to": {
            "rowidObject": "1450063"
        }
    },
    "entityType": "Automobile",
    "relationshipType": "PersonToAutomobile2"
},
{
    "businessEntity": {
        "Person": {
            "link": [
                {
                    "href": "http://localhost:8080/cmz/request/hm_icons/hierarchymanager/Person/Person_Small.png?ors=localhost-mdm103-DS_UI2",
                    "rel": "icon"
                }
            ],
            "rowidObject": "2568253",
            "creator": "admin",
            "createDate": "2020-04-01T14:38:03.956-04:00",
            "updatedBy": "admin",
            "lastUpdateDate": "2020-04-01T14:38:03.956-04:00",
            "consolidationInd": 4,
            "lastRowidSystem": "SFA",
            "hubStateInd": 1,
            "label": "LN, FN",
            "partyType": "Person",
            "lastName": "LN",
            "displayName": "FN LN",
            "generationSuffixCd": "X",
            "firstName": "FN"
        }
    },
    "entityLabel": "Person",
    "entityType": "Person",
    "depth": 1,
    "object": {
        "businessEntity": {
            "Person": {
                "link": [

```

```

        {
            "href": "http://localhost:8080/cmz/request/
hm_icons/hierarchymanager/Person/Person_Small.png?ors=localhost-mdm103-DS_UI2",
            "rel": "icon"
        }
    ],
    "rowidObject": "2568254",
    "creator": "admin",
    "createDate": "2020-04-01T14:38:06.577-04:00",
    "updatedBy": "admin",
    "lastUpdateDate": "2020-04-01T14:38:06.577-04:00",
    "consolidationInd": 4,
    "lastRowidSystem": "SFA",
    "hubStateInd": 1,
    "effectivePeriod": {},
    "label": "LN, FN",
    "partyType": "Person",
    "lastName": "LN",
    "displayName": "FN LN",
    "generationSuffixCd": "X",
    "firstName": "FN"
},
"entityLabel": "LN, FN",
"relationshipLabel": "Person associate Person",
"relationship": {
    "rowidObject": "1634729",
    "creator": "ds1",
    "createDate": "2020-04-01T14:40:14.870-04:00",
    "updatedBy": "admin",
    "lastUpdateDate": "2020-04-01T14:40:23.872-04:00",
    "consolidationInd": 4,
    "lastRowidSystem": "SYS0",
    "interactionId": "68520005",
    "hubStateInd": 1,
    "label": "Person associate Person",
    "rowidRelType": "103",
    "rowidHierarchy": "1",
    "note": "note DS",
    "from": {
        "rowidObject": "2568253"
    },
    "to": {
        "rowidObject": "2568254"
    }
},
"entityType": "Person",
"relationshipType": "PersonAssociatePerson2"
}
}
],
"approved": [
    {
        "businessEntity": {
            "Person": {
                "link": [
                    {
                        "href": "http://localhost:8080/cmz/request/hm_icons/
hierarchymanager/Person/Person_Small.png?ors=localhost-mdm103-DS_UI2",
                        "rel": "icon"
                    }
                ],
            },
            "rowidObject": "2568253",
            "creator": "admin",
            "createDate": "2020-04-01T14:38:03.956-04:00",
            "updatedBy": "admin",
            "lastUpdateDate": "2020-04-01T14:38:03.956-04:00",
            "consolidationInd": 4,
            "lastRowidSystem": "SFA",
            "hubStateInd": 1,
            "label": "LN, FN",

```

```

        "partyType": "Person",
        "lastName": "LN",
        "displayName": "FN LN",
        "generationSuffixCd": "X",
        "firstName": "FN"
    }
},
"entityLabel": "Person",
"entityType": "Person",
"depth": 1,
"object": {
    "businessEntity": {
        "Automobile": {
            "rowidObject": "1450063",
            "creator": "admin",
            "createDate": "2020-04-01T14:38:09.630-04:00",
            "updatedBy": "admin",
            "lastUpdateDate": "2020-04-01T14:38:09.630-04:00",
            "consolidationInd": 4,
            "lastRowidSystem": "SFA",
            "hubStateInd": 1,
            "effectivePeriod": {},
            "label": "Subaru",
            "model": "MODEL",
            "drivetrainCode": "4WD",
            "doorsCode": "2DR",
            "make": "Subaru"
        }
    },
    "entityLabel": "Subaru",
    "relationshipLabel": "PersonToAutomobile Relationship",
    "relationship": {
        "rowidObject": "1450083",
        "creator": "ds1",
        "createDate": "2020-04-01T14:40:14.921-04:00",
        "updatedBy": "ds1",
        "lastUpdateDate": "2020-04-01T14:40:14.922-04:00",
        "consolidationInd": 4,
        "lastRowidSystem": "SYS0",
        "interactionId": "68520005",
        "hubStateInd": 0,
        "label": "PersonToAutomobile Relationship",
        "from": {
            "rowidObject": "2568253"
        },
        "to": {
            "rowidObject": "1450063"
        }
    },
    "entityType": "Automobile",
    "relationshipType": "PersonToAutomobile2"
}
},
{
    "businessEntity": {
        "Person": {
            "link": [
                {
                    "href": "http://localhost:8080/cm/ request/hm_icons/
hierarchymanager/Person/Person_Small.png?ors=localhost-mdm103-DS_UI2",
                    "rel": "icon"
                }
            ],
            "rowidObject": "2568253",
            "creator": "admin",
            "createDate": "2020-04-01T14:38:03.956-04:00",
            "updatedBy": "admin",
            "lastUpdateDate": "2020-04-01T14:38:03.956-04:00",
            "consolidationInd": 4,
            "lastRowidSystem": "SFA",
            "hubStateInd": 1,

```



## Bulk Reject

The Bulk Reject REST API rejects changes to the network or hierarchy.

The API uses the POST method.

### Request URL

The Bulk Reject URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/reject
```

Make the following HTTP GET request to the Bulk Reject URL:

```
POST http://<host>:<port>/<context>/<database ID>/reject
```

### Sample API Request

The following sample request rejects changes:

```
POST http://localhost:8080/cmx/bulk/localhost-orcl-DS_UI1/reject
{
  "interactionId": "67080007",
  "rejectInteractionId": "67080008",
  "objects": [
    {
      "type": "Hierarchy",
      "name": "HPerson"
    }
  ]
}
```

### Sample API Response

The following sample shows the response after successfully rejecting changes:

```
{
  "interactionId": "68520003",
  "rejectInteractionId": "68520004",
  "type": "hierarchy",
  "name": "HPerson",
  "objects": [
    {
      "before": [
        {
          "businessEntity": {
            "Person": {
              "link": [
                {
                  "href": "http://localhost:8080/cmx/request/hm_icons/hierarchymanager/Person/Person_Small.png?ors=localhost-mdm103-DS_UI2",
                  "rel": "icon"
                }
              ],
              "rowidObject": "2568254",
              "creator": "admin",
              "createDate": "2020-04-01T14:38:06.577-04:00",
              "updatedBy": "admin",
              "lastUpdateDate": "2020-04-01T14:38:06.577-04:00",
              "consolidationInd": 4,
              "lastRowidSystem": "SFA",
              "hubStateInd": 1,
              "effectivePeriod": {},
              "label": "LN, FN",
              "partyType": "Person",
              "lastName": "LN",
              "displayName": "FN LN",
              "generationSuffixCd": "X",
            }
          }
        }
      ],
    }
  ]
}
```

```

        "firstName": "FN"
    }
},
"entityLabel": "LN, FN",
"entityType": "Person",
"depth": 0
}
],
"after": [
    {
        "businessEntity": {
            "Person": {
                "link": [
                    {
                        "href": "http://localhost:8080/cmX/request/hm_icons/
hierarchymanager/Person/Person_Small.png?ors=localhost-mdm103-DS_UI2",
                        "rel": "icon"
                    }
                ],
                "rowidObject": "2568254",
                "creator": "admin",
                "createDate": "2020-04-01T14:38:06.577-04:00",
                "updatedBy": "admin",
                "lastUpdateDate": "2020-04-01T14:38:06.577-04:00",
                "consolidationInd": 4,
                "lastRowidSystem": "SFA",
                "hubStateInd": 1,
                "effectivePeriod": {},
                "label": "LN, FN",
                "partyType": "Person",
                "lastName": "LN",
                "displayName": "FN LN",
                "generationSuffixCd": "X",
                "firstName": "FN"
            }
        },
        "entityLabel": "LN, FN",
        "entityType": "Person",
        "depth": 0
    }
],
"approved": [
    {
        "businessEntity": {
            "Person": {
                "link": [
                    {
                        "href": "/request/hm_icons/hierarchymanager/Person/
Person_Small.png?ors={ors}",
                        "rel": "icon"
                    }
                ],
                "rowidObject": "2568253",
                "creator": "admin",
                "createDate": "2020-04-01T14:38:03.956-04:00",
                "updatedBy": "admin",
                "lastUpdateDate": "2020-04-01T14:38:03.956-04:00",
                "consolidationInd": 4,
                "lastRowidSystem": "SFA",
                "hubStateInd": 1,
                "label": "LN, FN",
                "partyType": "Person",
                "lastName": "LN",
                "displayName": "FN LN",
                "generationSuffixCd": "X",
                "firstName": "FN"
            }
        },
        "entityLabel": "Person",
        "entityType": "Person",
        "depth": 1,
    }
]
}

```



```

"object": {
  "businessEntity": {
    "Automobile": {
      "rowidObject": "1450063",
      "creator": "admin",
      "createDate": "2020-04-01T14:38:09.630-04:00",
      "updatedBy": "admin",
      "lastUpdateDate": "2020-04-01T14:38:09.630-04:00",
      "consolidationInd": 4,
      "lastRowidSystem": "SFA",
      "hubStateInd": 1,
      "effectivePeriod": {},
      "label": "Subaru",
      "model": "MODEL",
      "drivetrainCode": "4WD",
      "doorsCode": "2DR",
      "make": "Subaru"
    }
  },
  "entityLabel": "Subaru",
  "relationshipLabel": "PersonToAutomobile Relationship",
  "relationship": {
    "rowidObject": "1450082",
    "creator": "ds1",
    "createDate": "2020-04-01T14:38:13.916-04:00",
    "updatedBy": "ds1",
    "lastUpdateDate": "2020-04-01T14:38:13.916-04:00",
    "consolidationInd": 4,
    "lastRowidSystem": "SYS0",
    "interactionId": "68520003",
    "hubStateInd": 0,
    "label": "PersonToAutomobile Relationship",
    "from": {
      "rowidObject": "2568253"
    },
    "to": {
      "rowidObject": "1450063"
    }
  },
  "entityType": "Automobile",
  "relationshipType": "PersonToAutomobile2"
},
{
  "businessEntity": {
    "Person": {
      "link": [
        {
          "href": "/request/hm_icons/hierarchymanager/Person/Person_Small.png?ors={ors}",
          "rel": "icon"
        }
      ],
      "rowidObject": "2568253",
      "creator": "admin",
      "createDate": "2020-04-01T14:38:03.956-04:00",
      "updatedBy": "admin",
      "lastUpdateDate": "2020-04-01T14:38:03.956-04:00",
      "consolidationInd": 4,
      "lastRowidSystem": "SFA",
      "hubStateInd": 1,
      "label": "LN, FN",
      "partyType": "Person",
      "lastName": "LN",
      "displayName": "FN LN",
      "generationSuffixCd": "X",
      "firstName": "FN"
    }
  },
  "entityLabel": "Person",
  "entityType": "Person",

```



## Request URL

The Start Match URL has the following format:

```
http://<host>:<port>/adhocmatch/<orsId>/job
```

Make the following HTTP POST request to the Start Match URL:

```
POST http://<host>:<port>/adhocmatch/<orsId>/job
```

## Parameters

Specify the parameters to start a business entity match job.

The following table describes the parameters:

Parameter	Type	Description
orsld	Path	Operational Reference Store database ID to retrieve the matched business entities.
fileId	Body	Optional. The ID of the file you want to import.
mappingId	Body	Optional. Mapping ID of the file you want to import.
matchRuleSet	Body	Optional. Specify the match rule set to apply to the business entity match job.

## Sample API Request

The following sample request returns the business entities imported after performing a match:

```
POST /cmx/jobcontrol/localhost-orcl-MDM_SAMPLE/execute/match HTTP/1.1
Content-Type: application/json
Host: localhost:8080
Content-Length: 64

{
  "tableName" : "C_PRODUCT",
  "matchRuleSetName" : "IDL"
}
```

## Sample API Response

The API returns a 200 OK response code after matching business entities and successfully importing a file. The response body is empty.

## Read Matched Records

The Read Matched Records REST API returns records that match a specified root record. You can review the list of records to determine which records you can merge with the original root record. You can use the Merge Records API to merge the records.

The API uses the GET method.

## Request URL

The Read Matched Records URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?action=matched
```

Make the following HTTP GET request to the Read Matched Records URL:

```
GET http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?action=matched
```

## Response Body

The response body contains the number of records that match the specified record, the details of the matching records, and a search token. Use the search token to fetch the subsequent pages of the match result.

## Sample API Request

The following sample request searches the business entity for records that match a record:

```
GET http://localhost:8080/cmxcsllocalhost-orcl-DS_UI1/Person/1038245?action=matched
```

## Sample API Response

The following sample response shows the details of the record that matches the specified record:

```
{
  "firstRecord": 1,
  "recordCount": 1,
  "pageSize": 10,
  "searchToken": "SVR1.AU5HE",
  "matchedEntity": [
    {
      "businessEntity": {
        "Person": {
          "link": [
            {
              "href": "http://localhost:8080/cmxcsllocalhost-orcl-DS_UI1/
Person/1038246",
              "rel": "self"
            }
          ],
          "rowidObject": "1038246",
          "creator": "admin",
          "createDate": "2008-08-12T02:15:02-07:00",
          "updatedBy": "Admin",
          "lastUpdateDate": "2008-08-12T02:59:17-07:00",
          "consolidationInd": "1",
          "lastRowidSystem": "SFA",
          "dirtyIndicator": "0",
          "hubStateInd": "1",
          "partyType": "Person",
          "lastName": "BATES",
          "firstName": "DAISY",
          "displayName": "DAISY BATES"
        }
      },
      "matchRule": "PUT"
    }
  ]
}
```

## Update Matched Records

The Update Matched Records REST API creates or updates a record in the match table. The match table contains the pairs of matched records in a business entity after you run a match process on the business entity. Use the API to add records that qualify for a merge with the specified record.

The API uses the PUT method.

## Request URL

The Update Matched Records URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?action=matched
```

Make the following HTTP PUT request to the Update Matched Records URL:

```
PUT http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?action=matched
```

Add the Content-Type header to specify the media type of the data you want to send with the request:

```
PUT http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?action=matched
Content-Type: application/<json/xml>
```

## Request Body

Send the list of records that match the specified record in the request body. Use the row ID or the source system and source key to specify the records.

## Sample API Request

The following sample adds a record in the match table:

```
PUT http://localhost:8080/cm/cs/localhost-ORCL-DS_UI1/Person/1038245?action=matched
{
  keys: [
    {
      rowid: "1038246"
    }
  ]
}
```

## Sample API Response

The API returns a 200 OK response on successfully creating a record in the match table. The response body is empty.

## Delete Matched Records

The Delete Matched Records REST API deletes matched records associated with a root record from the match table.

The API uses the DELETE method.

## Request URL

The Delete Matched Records URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?action=matched
```

Make the following HTTP DELETE request to the Delete Matched Records URL:

```
DELETE http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?
action=matched
```

Add the Content-Type header to specify the media type of the data you want to send with the request:

```
DELETE http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?
action=matched
Content-Type: application/<json/xml>
```

## Request Body

Send the list of records that you want to delete from the match table in the request body.

## Sample API Request

The following sample request deletes a record that matches the specified root record from the match table:

```
DELETE http://localhost:8080/cmxc/cs/localhost-orcl-DS_UI1/Person/1038245?action=matched
{
  keys: [
    {
      rowid: "1038246"
    }
  ]
}
```

## Sample API Response

The API returns a 200 OK response on successfully deleting a record from the match table. The response body is empty.

## Get Match Data in CSV

The Get Match Data in CSV REST API retrieves matched and unmatched business entities in CSV format after the system matches records from the source system and the target fields.

The API uses the GET method.

## Request URL

The Get Match Data URL has the following format:

```
http://<host>:<port>/adhocmatch/<orsId>/result/{jobGroupControlId}{?
withMatches,withoutMatches}
```

Make the following HTTP GET request to the Get Match Data Results URL:

```
GET http://<host>:<port>/adhocmatch/<orsId>/result/{jobGroupControlId}{?
withMatches,withoutMatches}
```

## Parameters

Specify the parameters to return the matched and unmatched business entities in CSV format.

The following table describes the parameters:

Parameter	Type	Description
jobGroupld	Path	Group ID of the batch job.
orsld	Path	Operational Reference Store database ID to retrieve business entity records.

Parameter	Type	Description
withMatches	Query	Optional. Use the following value: True: To return records that match existing data.
withoutMatches	Query	Optional. Use the following value: False: To return records that do not match existing data.

## Sample API Request

The following sample request returns matched and unmatched business entities in CSV format:

```
GET /cmx/adhocmatch/{ors}/result/{jobId}?withMatches=true&withoutMatches=true
Accept: application/csv
```

```
{
  item: [
    {
      businessEntity: {
        Person: {
          firstName: "John"
        }
      },
      matchedEntity: {
        {
          businessEntity: {Person: {rowidObject: 123}},
        }
        matchRule: "MRS|1",
        matchScore: 0.9
      }
    },
    {
      businessEntity: {
        Person: {
          firstName: "Alex"
        }
      }
    }
  ]
}
```

## Sample API Response

The API returns a 200 OK response code and the CSV file with the match results.

## Get Match Data in JSON

The Get Match Data in JSON REST API retrieves matched and unmatched business entities in CSV format after the system matches records from the source system and the target fields.

The API uses the GET method.

## Request URL

The Match Results URL has the following format:

```
http://<host>:<port>/adhocmatch/<orsId>/result/{jobGroupControlId}{?
withMatches,withoutMatches}
```

Make the following HTTP GET request to the Match Results URL:

```
GET http://<host>:<port>/adhocmatch/<orsId>/result/{jobGroupControlId}{?withMatches,withoutMatches}
```

## Parameters

Specify the parameters to return the matched and unmatched business entities in CSV format.

The following table describes the parameters:

Parameter	Type	Description
jobGroupld	Path	Group ID of the batch job.
orsld	Path	Operational Reference Store database ID to retrieve business entity records.
withMatches	Query	Optional. Use the following value: True: To return records that match existing data.
withoutMatches	Query	Optional. Use the following value: False: To return records that do not match existing data.

## Sample API Request

The following sample request returns the list of matched and unmatched business entities after the system performs a match:

```
GET /cmx/adhocmatch/{ors}/result/{jobId}?withMatches=true&withoutMatches=true
Accept: application/json
```

```
{
  item: [
    {
      businessEntity: {
        Person: {
          firstName: "John"
        }
      },
      matchedEntity: {
        {
          businessEntity: {Person: {rowidObject: 123}},
        }
        matchRule: "MRS|1",
        matchScore: 0.9
      }
    },
    {
      businessEntity: {
        Person: {
          firstName: "Alex"
        }
      }
    }
  ]
}
```

## Sample API Response

The API returns a 200 OK response code and the JSON file with the match results.



## Import Matched File

The Import Matched File REST API matches new business entities with existing business entities before importing the file. After the import operation is completed, the matched business entities are updated with new data.

You can import duplicate business entities, unique business entities or duplicate and unique business entities.

The API uses the POST method.

### Request URL

The Import Matched File URL has the following format:

```
http://<host>:<port>/<context>/<orsId>/<aftermatch>
```

Make the following HTTP POST request to the Import Matched File URL:

```
POST http://<host>:<port>/<context>/<orsId>/<aftermatch>
```

### Parameters

Specify the parameters to match new business entities with existing business before importing the file.

The following table describes the parameters:

Parameter	Type	Description
orsId	Path	Operational Reference Store database ID to import the file after matching existing records.
filter	Query	Optional. Use the following filter values: withMatches: Enter <code>true</code> if the records match existing records. withoutMatches: Enter <code>false</code> if the records do not match existing records.
jobGroupControlId	Query	Optional. Match job group ID.
systemName	Query	Optional. Source system name.

### Sample API Request

The following sample request matches new business entities with existing business entities before importing the file:

```
POST /cmx/beimport/{ors}/aftermatch
{
  jobGroupControlId: "...",
  systemName: "SFA",
  filter: {
    withMatches: true,
    withoutMatches: false
  }
}
```

### Sample API Response

The API returns a 200 OK response code after successfully matching new business entities with existing business entities and importing the file. The response body is empty.

## Get Source System Metadata

The Get Source System Metadata REST API returns the metadata of the source systems.

The API uses the GET method.

### Request URL

The Get Source System Metadata URL has the following format:

```
http://<host>:<port>/<context>/<orsId>/sourceSystem
```

Make the following HTTP GET request to the Get Source System Metadata URL:

```
GET http://<host>:<port>/<context>/<orsId>/sourceSystem
```

### Parameters

Specify the source system you want to return in the response.

The following table describes the parameters in the request body:

Parameter	Type	Description
orsId	Path	Operational Reference Store ID of the database to retrieve the source system.
entityId	Path	ID of the business entity.
entityName	Path	Name of the business entity.
action	Query	The action you want API to perform. The following is the default value: <code>getSourceSystems</code>
aggregate	Query	Optional. Aggregate data across multiple XREFs. Use the following values: <ul style="list-style-type: none"><li>- RECORD</li><li>- NODE</li><li>- ENTITY</li></ul>
children	Query	Optional. List of child node names. If specified, the response contains the child node names.
compact	Query	Optional. specify to return a compact result.
contentMetadata	Query	Optional. Metadata of the list of history events. Use the following values: XREF PENDING_XREF DELETED_XREF HISTORY MATCH BVT TRUST

Parameter	Type	Description
contributorsOnly	Query	Optional. Counts all the XREFs or those XREFs that contribute to the best version of the truth (BVT).
depth	Query	Optional. Number of child levels to return.
describe	Query	Optional. Adds the source system description.
fields	Query	Optional. Comma-separated list of business entity fields. If specified, the response only contains listed fields.
filter	Query	Optional. Filter expression.
firstRecord	Query	Optional. Specifies the first row in the result.
order	Query	Optional. Comma-separated list of field names with an optional prefix of + or -. The prefix + indicates to sort the results in ascending order, and the prefix - indicates to sort the results in descending order. Default is +. When you specify more than one parameter, the result set is ordered by the parameter that is first in the list, followed by the next.
recordStates	Query	Optional. Record states returned in the list of history events. Provide a comma-separated list. You can use the following values: - ACTIVE - PENDING - DELETED
recordsToReturn	Query	Optional. Specifies the number of rows to return.
recordsTotal	Query	Optional. If set to <code>true</code> , returns the number of records in the result. Default is <code>false</code>

## Sample API Request

The following sample request returns the available source system metadata:

```
GET /cmx/metadata/localhost-orcl-MDM_SAMPLE/sourceSystem HTTP/1.1
Host: localhost:8080
```

## Sample API Response

The following sample response returns the available source system metadata:

```
HTTP/1.1 200 OK
Server: JBoss-EAP/7
X-Powered-By: Undertow/1
Content-Type: application/json;charset=UTF-8
Content-Length: 328
```

```
{
  "totalCount" : 7,
  "firstRecord" : 1,
  "pageSize" : 7,
  "sourceSystems" : [ {
    "name" : "Product"
  }, {
    "name" : "Informatica Data Director"
```

```

    }, {
      "name" : "Legacy"
    }, {
      "name" : "SFA"
    }, {
      "name" : "Lookups"
    }, {
      "name" : "OrgDataInc"
    }, {
      "name" : "Admin"
    } ]
  }
}

```

## Get Record History Events

The Get Record History Events REST API returns a list of history events, or groups of history events, associated with a record. Send the record ID in the request body.

The API uses the GET method to return the following data for each group of history events:

- Start and end date for the group
- Number of events in the group

The API returns the following data for each history event:

- History event ID
- Date of the change
- User who made the change
- List of history tables that are affected by the change
- List of record nodes that are affected by the change

### Request URL

The Get Record History Events URL has the following format:

```

http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?
action=listHistoryEvents

```

Make the following HTTP GET request to the Get Record History Events URL:

```

GET http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?
action=listHistoryEvents

```

## Query Parameters

The ID of the record is a required parameter. The API uses the record ID to find all related history events.

The following table lists the query parameters:

Parameter	Description
startDate and endDate	Optional. Date range for which you want to retrieve the data. If you specify a date range, the response contains only events within this range.
granularity	Optional. The level of detail to group history events. If specified, the response groups history events. Otherwise, the response does not group history events. Use one of the following values: <ul style="list-style-type: none"><li>- YEAR</li><li>- QUARTER</li><li>- MONTH</li><li>- WEEK</li><li>- DAY</li><li>- HOUR</li><li>- MINUTE</li><li>- AUTO</li></ul>
recordStates	Optional. Record states returned in the list of history events. Provide a comma-separated list. You can use the following values: <ul style="list-style-type: none"><li>- ACTIVE</li><li>- PENDING</li><li>- DELETED</li></ul>
contentMetadata	Optional. Metadata for the list of history events. Provide a comma-separated list. You can use the following values: <ul style="list-style-type: none"><li>- XREF</li><li>- PENDING_XREF</li><li>- DELETED_XREF</li><li>- HISTORY</li><li>- MATCH</li><li>- BVT</li><li>- TRUST</li></ul>
children	Optional. Comma-separated list of the child node names. If specified, the response contains the child node names.
order	Optional. Comma-separated list of field names with an optional prefix of + or -. The prefix + indicates to sort the results in ascending order, and the prefix - indicates to sort the results in descending order. Default is +. When you specify more than one parameter, the result set is ordered by the parameter that is first in the list, followed by the next.
fields	Optional. Comma-separated list of business entity fields. If specified, the response only contains listed fields.
filter	Optional. Filter expression.
depth	Optional. Number of child levels to return.
recordsToReturn	Optional. Specifies the number of rows to return.
searchToken	Optional. Specifies the search token returned with previous request.

Parameter	Description
returnTotal	Optional. If set to <code>true</code> , returns the number of records in the result. Default is <code>false</code> .
firstRecord	Optional. Specifies the first row in the result.
changeType	Optional. Specifies the types of change returned in the result. Provide a comma-separated list. You can use the following values: <ul style="list-style-type: none"> <li>- BO</li> <li>- XREF</li> <li>- BVT</li> <li>- MERGE</li> <li>- MERGE_AS_SOURCE</li> <li>- MERGE_AS_TARGET</li> <li>- UNMERGE_AS_SOURCE</li> <li>- UNMERGE_AS_TARGET</li> </ul>

## RELATED TOPICS:

- [“Formats for Dates and Time in UTC” on page 30](#)

## Sample API Request

The following sample request returns all merges, grouped by year, for a record since January 1, 2000:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/123?
action=listHistoryEvents&startDate=2010-01-01&granularity=YEAR&depth=2&changeType=MERGE
```

## Sample API Response

The following sample response lists the merges for the specified record since January 1, 2000:

```
{
  firstRecord: 1,
  recordCount: 2
  item: [
    {
      link: [ // you can use links directly to get event list
        {rel: "events", href: "/Person/123?
action=listHistoryEvents&startDate=2000-01-01&endDate=2001-01-01&depth=2&changeType=MERGE
"}
      ],
      startDate: "2000-01-01",
      endDate: "2001-01-01",
      eventCount: 123
    },
    // no events in 2001, 2002, ... 2009
    {
      link: [
        {rel: "events", href: "/Person/123?
action=listHistoryEvents&startDate=2010-01-01&endDate=2011-01-01&depth=2&changeType=MERGE
"}
      ],
      startDate: "2010-01-01",
      endDate: "2011-01-01",
      eventCount: 23
    }
    // no events in 2011, ..., 2016
  ]
}
```

## Get Event Details

The Get Event Details REST API returns details of a specific history event associated with a record. The API returns details such as the type of change made, and the values before and after the change. Send the record ID and history event ID in the request body.

The API uses the GET method.

### Request URL

The Get Event Details URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?  
action=getHistoryEventDetails
```

Make the following HTTP GET request to the Get Event Details URL:

```
GET http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId>?  
action=getHistoryEventDetails
```

### Query Parameters

Before you begin, use the Get Record History Events API to list the history events associated with a record. From the results returned, use the history event ID and the record ID as query parameters.

The following table lists the query parameters:

Parameter	Description
eventID	Required. The Get Record History Events API returns the event IDs for history events.
recordStates	Optional. Record states returned in the list of history events. Provide a comma-separated list. You can use the following values: - ACTIVE - PENDING - DELETED
contentMetadata	Optional. Metadata for the list of history events. Provide a comma-separated list. You can use the following values: - XREF - PENDING_XREF - DELETED_XREF - HISTORY - MATCH - BVT - TRUST
children	Optional. Comma-separated list of child node names. If specified, the response contains the child node names.
order	Optional. Comma-separated list of field names with an optional prefix of + or -. The prefix + indicates to sort the results in ascending order, and the prefix - indicates to sort the results in descending order. Default is +. When you specify more than one parameter, the result set is ordered by the parameter that is first in the list, followed by the next.

Parameter	Description
fields	Optional. Comma-separated list of business entity fields. If specified, the response only contains listed fields.
filter	Optional. Filter expression.
depth	Optional. Number of child levels to return.
recordsToReturn	Optional. Specifies the number of rows to return.
searchToken	Optional. Specifies the search token returned with previous request.
returnTotal	Optional. If set to <code>true</code> , returns the number of records in the result. Default is <code>false</code> .
firstRecord	Optional. Specifies the first row in the result.

## Sample API Request

The following sample request returns information for a history event:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/123?
action=getHistoryEventDetails&eventId=2016-07-14T02%3A01%3A24.529%2B0000
```

## Sample API Response

The following sample response shows the details of the specified event:

```
{
  "eventId": "2016-07-14T02:01:24.529+0000",
  "eventDate": "2016-07-14T02:01:24.529Z",
  "user": "admin",
  "changeType": [
    "BVT",
    "BO",
    "UNMERGE_AS_TARGET"
  ],
  "businessEntity": {
    "Person": {
      "rowidObject": "438243",
      "creator": "datasteward1",
      "createDate": "2016-07-08T20:42:47.402Z",
      "updatedBy": "admin",
      "lastUpdateDate": "2016-07-14T01:42:50.841Z",
      "consolidationInd": 1,
      "lastRowidSystem": "SYS0",
      "hubStateInd": 1,
      "label": "BE,AC",
      "partyType": "Person",
      "lastName": "BE",
      "displayName": "AC BE",
      "firstName": "AC"
    }
  }
}
```

## List Reports

The List Reports REST API returns a list of registered reports and their configuration.

The API uses the GET method.



## Request URL

The List Reports REST URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/list
```

Make the following HTTP GET request to the URL:

```
GET http://<host>:<port>/<context>/<database ID>/list
```

## Query Parameters

You can use the `show` parameter to specify whether you want to list all reports or only root reports.

To return all reports, including root reports and drilldown reports, use the following query parameter:

```
list?show=all
```

To return only the root reports, use the following query parameter:

```
list?show=root
```

**Note:** If you do not specify the `show` parameter, the API returns root reports.

## Response Body

The response body contains the list of reports, including the details of each report.

The following table describes the report configuration parameters in the response body:

Parameter	Description
ROWID_RPT_CONFIG	ID of report.
DIMENSION_NAME_1	The name of a dimension of data in the report. For example, a dimension might be User Name, Review task type, or business entity type.
DIMENSION_NAME_2	Optional. The name of a dimension of data in the report. For example, a dimension might be User Name, Review task type, or business entity type.
TIMEPERIOD_NAME	Optional. Name of the period of time to which the data applies. For example, you might specify <code>Month</code> .
RPT_NAME	Name of the report.
METRIC_NAME	Label for the type of data collected by the report. By default, the value specified for this parameter appears as the name of the y-axis in the chart. For example, you might have a report that collects information about closed tasks by user. You might use the metric name <code>Number of closed tasks</code> .
RPT_DESC	Description of the report.
RPT_TYPE	Indicates whether the report is a drilldown report. If the value is <code>null</code> , then the report is a root report. If the value is anything other than <code>null</code> , then the report is a drilldown report.

## Sample API Request

The following sample request returns all registered reports, including root reports and drilldown reports:

```
GET http://localhost:8080/cmz/report/localhost-orcl-DS_UI1/list?show=all
```

## Sample API Response

The following sample response shows a list of registered reports:

```
{
  "ROWID_RPT_CONFIG": "7 ",
  "DIMENSION_NAME_1": "Country",
  "DIMENSION_NAME_2": "Users",
  "TIMEPERIOD_NAME": "Month",
  "RPT_NAME": "Top 10 Countries",
  "METRIC_NAME": "Number Of Customers",
  "RPT_DESC": "Top 10 Countries",
  "RPT_TYPE": "null"
},
{
  "metadata": {
    "ROWID_RPT_CONFIG": "12 ",
    "DIMENSION_NAME_1": "City code",
    "DIMENSION_NAME_2": "null",
    "TIMEPERIOD_NAME": "null",
    "RPT_NAME": "Customer by City",
    "METRIC_NAME": "Customer by City",
    "RPT_DESC": "Customer by City",
    "RPT_TYPE": "null"
  }
}
```

## Get Report Configuration and Data

The Get Report Configuration and Data REST API returns the report configuration and data.

The API uses the GET method.

### Request URL

The Get Report Configuration and Data REST URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/data/<report ID>
```

Make the following HTTP GET request to the URL:

```
GET http://<host>:<port>/<context>/<database ID>/data/<reportId>
```

### Query Parameters

The report ID is a required URL parameter. Use the report ID to specify the report for which you want the configuration and data.

### Response Body

The response includes the report configuration and data.

The following table describes the parameters in the response body:

Parameter	Description
metadata	Includes the report configuration.
ROWID_RPT_CONFIG	ID of report.
DIMENSION_NAME_1	The name of a dimension of data in the report. For example, a dimension might be User Name, Review task type, or business entity type.

Parameter	Description
DIMENSION_NAME_2	Optional. The name of a dimension of data in the report. For example, a dimension might be User Name, Review task type, or business entity type.
TIMEPERIOD_NAME	Optional. Name of the period of time to which the data applies. For example, you might specify <code>Month</code> .
RPT_NAME	Name of the report.
METRIC_NAME	Label for the type of data collected by the report. By default, the value specified for this parameter appears as the name of the y-axis in the chart. For example, you might have a report that collects information about closed tasks by user. You might use the metric name <code>Number of closed tasks</code> .
RPT_DESC	Description of the report.
RPT_TYPE	Indicates whether the report is a drilldown report. If the value is <code>null</code> , then the report is a root report. If the value is anything other than <code>null</code> , then the report is a drilldown report.
fieldsMetadata	Lists the fields in a report data array. Values include <code>DIMENSION_VALUE_1</code> , <code>DIMENSION_VALUE_2</code> , <code>TIMEPERIOD_VALUE</code> , <code>METRIC_VALUE</code> , and <code>DRILLDOWN_RPT_ID</code> .
data	Lists the values for each field in a report data array.

## Sample API Request

The following sample request returns the report configuration and data for a report:

```
GET http://localhost:8080/cmx/report/localhost-orcl-DS_UI1/data/MDM.RPT.1
```

## Sample API Response

The following sample response shows the report configuration and data for a report:

```
{
  "metadata": {
    "ROWID_RPT_CONFIG": "11 ",
    "DIMENSION_NAME_1": "Country code",
    "DIMENSION_NAME_2": "null",
    "TIMEPERIOD_NAME": "null",
    "RPT_NAME": "Customer by Region",
    "METRIC_NAME": "Customer by Region",
    "RPT_DESC": "Customer by Region",
    "RPT_TYPE": "null",
    "fieldsMetadata": ["DIMENSION_VALUE_1", "DIMENSION_VALUE_2", "TIMEPERIOD_VALUE",
    "METRIC_VALUE", "DRILLDOWN_RPT_ID"]
  },
  "data": [
    [
      "CA ",
      "null",
      "null",
      "9",
      "123"
    ],
    [
      "IN ",
      "null",
      "null",
      "19",
      "456"
    ]
  ]
}
```

```

    ],
    [
      "US ",
      "United States",
      "null",
      "9",
      "678"
    ],
    [
      "IN ",
      "India ",
      "null",
      "19",
      null
    ]
  ]
}

```

## Get Report Configuration and Drilldown Reports

The Get Report Configuration and Drilldown Reports REST API returns the report configuration and associated drilldown reports.

The API uses the GET method.

### Request URL

The Get Report Configuration and Drilldown Reports REST URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/meta/<report ID>
```

Make the following HTTP GET request to the URL:

```
GET http://<host>:<port>/<context>/<database ID>/meta/<report ID>
```

### Query Parameters

The report ID is a required URL parameter. Use the report ID to specify the report for which you want the configuration and associated drilldown reports.

### Response Body

The response body includes the following parameters:

Parameter	Description
ROWID_RPT_CONFIG	ID of report.
DIMENSION_NAME_1	The name of a dimension of data in the report. For example, a dimension might be User Name, Review task type, or business entity type.
DIMENSION_NAME_2	Optional. The name of a dimension of data in the report. For example, a dimension might be User Name, Review task type, or business entity type.
TIMEPERIOD_NAME	Optional. Name of the period of time to which the data applies. For example, you might specify <code>Month</code> .
RPT_NAME	Name of the report.

Parameter	Description
METRIC_NAME	Label for the type of data collected by the report. By default, the value specified for this parameter appears as the name of the y-axis in the chart. For example, you might have a report that collects information about closed tasks by user. You might use the metric name Number of closed tasks.
RPT_DESC	Description of the report.
RPT_TYPE	Indicates whether the report is a drilldown report. If the value is <code>null</code> , then the report is a root report. If the value is anything other than <code>null</code> , then the report is a drilldown report.
DRILLDOWN	Lists drilldown reports. The order of the listed reports reflects the level of the report relative to the root report.
RPT_NAME	Name of the drilldown report.
DETAILED_RPT_IDS	Lists the IDs of the report details. Includes report detail IDs of the drilldown reports for the drilldown level.
CONFIG_RPT_IDS	Lists the IDs of the drilldown reports for the drilldown level.

## Sample API Request

The following sample request returns the report configuration and associated drilldown reports:

```
GET http://localhost:8080/cm/./report/localhost-orcl-DS_UI1/meta/SVR1.2X9N0
```

## Sample API Response

The following sample response shows the report configuration and associated drilldown reports:

```
{
  "ROWID_RPT_CONFIG": "7 ",
  "DIMENSION_NAME_1": "Country",
  "DIMENSION_NAME_2": "Users",
  "TIMEPERIOD_NAME": "Month",
  "RPT_NAME": "Top 10 Countries",
  "METRIC_NAME": "Number Of Customers",
  "RPT_DESC": "Top 10 Countries",
  "RPT_TYPE": "null",
  "DRILLDOWN":
  [
    {
      "RPT_NAME": "Customer by region - First level drilldown",
      "DETAILED_RPT_IDS":["1", "2", "3"],
      "CONFIG_RPT_IDS":["1"]
    },
    {
      "RPT_NAME": "Customer by city - Second level drilldown",
      "DETAILED_RPT_IDS":["5", "6", "7", "8", "9", "10"],
      "CONFIG_RPT_IDS":["2"]
    }
  ]
}
```

## Register Report

The Register Report REST API registers custom reports. The API returns the report ID for the report, which you can use in other APIs.

The API uses the POST method.

For information about registering the out of the box reports, see [“Managing the Out of the Box Reports” on page 301](#).

### Request URL

The Register Report REST URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/list
```

Make the following HTTP POST request to the URL:

```
POST http://<host>:<port>/<context>/<database ID>/list
```

### Request Body

Specify the report configuration.

The following table describes the parameters for the report details in the request body:

Parameter	Description
ROWID_RPT_CONFIG	ID of report.
DIMENSION_NAME_1	The name of a dimension of data in the report. For example, a dimension might be User Name, Review task type, or business entity type.
DIMENSION_NAME_2	Optional. The name of a dimension of data in the report. For example, a dimension might be User Name, Review task type, or business entity type.
TIMEPERIOD_NAME	Optional. Name of the period of time to which the data applies. For example, you might specify Month.
RPT_NAME	Name of the report.
METRIC_NAME	Label for the type of data collected by the report. By default, the value specified for this parameter appears as the name of the y-axis in the chart. For example, you might have a report that collects information about closed tasks by user. You might use the metric name Number of closed tasks.
RPT_DESC	Description of the report.
RPT_TYPE	Indicates whether the report is a drilldown report. If the value is null, then the report is a root report. If the value is anything other than null, then the report is a drilldown report.

### Sample API Request

The following sample request registers a report:

```
POST http://localhost:8080/cmx/report/localhost-orcl-DS_UI1/list
{
  "DIMENSION_NAME_1": "Country",
  "DIMENSION_NAME_2": "Users",
  "TIMEPERIOD_NAME": "null",
```

```

    "RPT_NAME": "Top 10 Countries",
    "METRIC_NAME": "Number Of Customers",
    "RPT_DESC": "Top 10 Countries"
  }

```

## Sample API Response

The following sample shows the response on successfully registering a report:

```

{
  "ROWID_RPT_CONFIG": "SVR1.2X9N0",
  "DIMENSION_NAME_1": "Subject area",
  "DIMENSION_NAME_2": "Source System",
  "TIMEPERIOD_NAME": "Month",
  "RPT_NAME": "randomname750",
  "RPT_DESC": "Source system Metrics",
  "METRIC_NAME": "Number Of Records",
  "RPT_TYPE": null
}

```

The API returns the report ID in the ROWID\_RPT\_CONFIG parameter.

## Update Report Configuration

The Update Report Configuration REST API updates the configuration of a report.

The API uses the POST method.

### Request URL

The Update Report Configuration REST URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/list/<report ID>
```

Make the following HTTP POST request to the URL:

```
POST http://<host>:<port>/<context>/<database ID>/list/<report ID>
```

### Query Parameters

The report ID is a required URL parameter. Use the report ID to specify the report for which you want to update the configuration.

### Request Body

Specify the report configuration that you want to update.

The following table describes the parameters in the request body:

Parameter	Description
DIMENSION_NAME_1	The name of a dimension of data in the report. For example, a dimension might be User Name, Review task type, or business entity type.
DIMENSION_NAME_2	Optional. The name of a dimension of data in the report. For example, a dimension might be User Name, Review task type, or business entity type.
TIMEPERIOD_NAME	Optional. Name of the period of time to which the data applies. For example, you might specify <code>Month</code> .

Parameter	Description
RPT_NAME	Name of the report.
METRIC_NAME	Label for the type of data collected by the report. By default, the value specified for this parameter appears as the name of the y-axis in the chart. For example, you might have a report that collects information about closed tasks by user. You might use the metric name Number of closed tasks.
RPT_DESC	Description of the report.

## Sample API Request

The following sample request updates the configuration of a report:

```
POST http://localhost:8080/cmxc/report/localhost-orcl-DS_UI1/list/SVR1.2X9N0
{
  "DIMENSION_NAME_1": "Country",
  "DIMENSION_NAME_2": "Users",
  "TIMEPERIOD_NAME": "null",
  "RPT_NAME": "Top 10 Countries",
  "METRIC_NAME": "Number Of Customers",
  "RPT_DESC": "Top 10 Countries"
}
```

## Sample API Response

The API does not return a response when the report configuration is successfully updated.

## Add or Update Report Data

The Add or Update Report Data REST API adds or updates data entries in a report.

**Note:** If the report contains report data, the API overrides the report data.

The API uses the POST method.

### Request URL

The Add or Update Report Data REST URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/data/<report ID>
```

Make the following HTTP POST request to the URL:

```
POST http://<host>:<port>/<context>/<database ID>/data/<report ID>
```

### Query Parameters

The report ID is a required URL parameter. Use the report ID to specify the report for which you want to add or update data entries.



## Request Body

Specify the report for which you want to add or update data entries.

The following table describes the parameters for the report data in the request body:

Parameter	Description
DIMENSION_NAME_1	The name of a dimension of data in the report. For example, a dimension might be User Name, Review task type, or business entity type.
DIMENSION_NAME_2	Optional. The name of a dimension of data in the report. For example, a dimension might be User Name, Review task type, or business entity type.
TIMEPERIOD_NAME	Optional. Name of the period of time to which the data applies. For example, you might specify <i>Month</i> .
METRIC_VALUE	Number that represents the dimensions of data. For example, you might have a report that collects information about closed tasks by user. One dimension of the report is the user John Smith, and another dimension is the Review task type. The metric value might be 5. This means that John Smith closed five tasks of the Review task type.
DRILLDOWN_RPT_ID	ID of a drilldown report. If the value is <i>null</i> , then there is no drilldown report configured.

## Sample API Request

The following sample request adds or updates data entries in a report:

```
POST http://localhost:8080/cmx/report/localhost-orcl-DS_UI1/data/SVR1.2X9N0
[
  {
    "DIMENSION_VALUE_1": "11:Org,ex.Phone",
    "DIMENSION_VALUE_2": "Cross Source Matches",
    "TIMEPERIOD_VALUE": "null",
    "METRIC_VALUE": "5",
    "DRILLDOWN_RPT_ID": null
  },
  {
    "DIMENSION_VALUE_1": "9:Org Name,City,Zip",
    "DIMENSION_VALUE_2": "Cross Source Matches",
    "TIMEPERIOD_VALUE": "null",
    "METRIC_VALUE": "40",
    "DRILLDOWN_RPT_ID": null
  },
  {
    "DIMENSION_VALUE_1": "12:Org,ex.Email",
    "DIMENSION_VALUE_2": "CRM Matches",
    "TIMEPERIOD_VALUE": "null",
    "METRIC_VALUE": "7",
    "DRILLDOWN_RPT_ID": null
  }
]
```

## Sample API Response

The API does not return a response when the data entries in the report are successfully added or updated.

## Delete Report

The Delete Report REST API deletes a report.

The API uses the DELETE method.

## Request URL

The Delete Report REST URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/data/<report ID>
```

Make the following HTTP DELETE request to the URL:

```
DELETE http://<host>:<port>/<context>/<database ID>/data/<report ID>
```

## Query Parameters

The report ID is a required URL parameter. Use the report ID to specify the report that you want to delete.

## Sample API Request

The following sample request deletes a report:

```
DELETE http://localhost:8080/cmx/report/localhost-orcl-DS_UI1/data/SVR1.2X9N0
```

## Sample API Response

The API does not return a response when the report is successfully deleted.

# Run Report Update Job

The Run Report Update Job REST API starts the batch job associated with the out of the box report.

The API uses the GET method.

## Request URL

The Run Report Update Job REST URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/data/collect/<report ID>
```

Make the following HTTP GET request to the URL:

```
GET http://<host>:<port>/<context>/<database ID>/data/collect/<report ID>
```

## Query Parameters

The report ID is a required URL parameter. Use the report ID to specify the report for which you want to run an update job.

## Response Body

The response might contain one of the following values in the `status` parameter:

Value	Description
PROCESSING	Job was triggered. When the job completes, the job ID is returned.
COMPLETED_SUCCESSFULLY	Report data was calculated immediately without running a job.

Value	Description
DONE	Job was not started and a calculation was performed in a synchronous mode.
FAILED	Job was not started because of an error. The <code>errorMessage</code> and <code>errorCode</code> attributes explain the error.

## Sample API Request

The following sample request runs an update job for a report:

```
GET http://localhost:8080/cmx/report/localhost-orcl-DS_UI1/data/collect/SVR1.2X9N0
```

## Sample API Response

The following sample shows the response on successfully running the update job for a report:

```
{
  "status": "PROCESSING"
}
```

## Get Status of Report Update Job

The Get Status of Report Update Job REST API returns the status of a report update job.

The API uses the GET method.

### Request URL

The Get Status of Report Update Job REST URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/data/collect/<report ID>/status
```

Make the following HTTP GET request to the URL:

```
GET http://<host>:<port>/<context>/<database ID>/data/collect/<report ID>/status
```

### Query Parameters

The ID of the report is a required URL parameter. Use the `report ID` parameter to specify the report for which you want to get the status of the update job.

### Response Body

The response contains the following parameters:

Parameter	Description
<code>status</code>	Status of the report update job. Values are <code>COMPLETED_SUCCESSFULLY</code> , <code>PROCESSING</code> , <code>FAILED</code> , or <code>ERROR</code> .
<code>lastUpdateDate</code>	Last update date for the report. Defined for report update jobs with the <code>COMPLETED_SUCCESSFULLY</code> status.

Parameter	Description
errorCode	Optional. Error code for error with report update job. Defined for report update jobs with the <code>ERROR</code> status.
errorMessage	Optional. Error message for error with report update job. Defined for report update jobs with the <code>ERROR</code> status.

## Sample API Request

The following sample request returns the status of a report update job:

```
GET http://<host>:<port>/<context>/<database ID>/data/collect/SVR1.2X9N1/status
```

## Sample API Response

The following sample shows the response on checking the status of a report update job:

```
{
  "status": "COMPLETED_SUCCESSFULLY",
  "jobId": "SVR1.2X9N1",
  "lastUpdateDate": "2019-10-31T14:37:11.846-04:00",
  "startRunDate": "2019-10-31T14:37:09.120-04:00"
}
```

## List Job Groups

The List Job Groups REST API returns the list of existing job groups and the status. You can filter the jobs by the job group type. For example, you can view all import jobs only.

The API uses the GET method.

### Request URL

The Get List of Jobs URL has the following format:

```
http://<host>:<port>/<jobcontrol>/<orsId>/<group?jobGroupType>
```

Make the following HTTP GET request to the Get List of Jobs URL:

```
GET http://<host>:<port>/<jobcontrol>/<orsId>/<group?jobGroupType>
```

### Parameters

Specify the parameters to return the list of existing job groups and the status.

The following table describes the parameters:

Parameter	Path	Description
jobGroupControllId	Path	ID of the job group.
orsId	Path	Operational Reference Store database ID to return the list of existing job groups and the status.

Parameter	Path	Description
detailed	Query	Optional. Use one of the following values: True: To view a detailed list of existing job groups and the status. False: To view a brief list of existing job groups and the status.
firstRecord	Query	Optional. The first record in the list of existing job groups.
jobGroupType	Query	Optional. List jobs by the type of job groups. Use one of the following values: Import Match Import_After_Match Find_Replace
groupBy	Query	Optional. Group jobs based on the business entity.
recordsToReturn	Query	Optional. The number of records you want to return.
returnTotal	Query	Optional. Set to True. the total number of records to return.

## Sample API Request

The following sample request returns the list of existing job groups and the status:

```
GET /cmx/jobcontrol/localhost-orcl-MDM_SAMPLE/group/SVR1.1G7UY?groupBy=owningTable
HTTP/1.1
Host: localhost:8080
```

## Sample API Response

The following sample response returns the list of existing job groups and the status:

```
HTTP/1.1 200 OK
Server: JBoss-EAP/7
Content-Disposition: inline;filename=f.txt
X-Powered-By: Undertow/1
Content-Type: application/json;charset=UTF-8
Content-Length: 1551

{
  "jobGroupControlId" : "SVR1.1G7UY",
  "jobGroup" : {
    "type" : "IMPORT",
    "name" : "BE_Import_RH_LE_PersonView[1]_16f9ffd55b5"
  },
  "startDate" : "2020-01-13T13:06:26.649-05:00",
  "endDate" : "2020-01-13T13:06:40.842-05:00",
  "status" : "COMPLETED_WITH_ERRORS",
  "statusMessage" : "Completed with errors/warnings",
  "errorMessages" : [ "Completed with errors/warnings", "Completed with errors/warnings", "Completed with errors/warnings", "Completed with errors/warnings", "Completed with errors/warnings" ],
  "jobItems" : [ {
    "startDate" : "2020-01-13T13:06:36.150-05:00",
    "endDate" : "2020-01-13T13:06:40.808-05:00",
    "status" : "COMPLETED_WITH_ERRORS",
    "owningTable" : "PersonView",
    "errorMessages" : [ "Completed with errors/warnings", "Completed with errors/warnings" ]
  }
]
```

```

warnings", "Completed with errors/warnings", "Completed with errors/warnings",
"Completed with errors/warnings", "Completed with errors/warnings" ],
  "progress" : 100,
  "metrics" : {
    "200" : 6,
    "300" : 5,
    "201" : 5,
    "301" : 4,
    "202" : 1,
    "302" : 1
  }
} ],
"parameters" : {
  "mappingId" : "SVR1.1G7UX",
  "fileName" : "my.pdf",
  "systemName" : "Admin",
  "fileId" : "DB_SVR1.1G7UW"
},
"metricLabels" : {
  "200" : "Total lines in file",
  "201" : "Converted lines",
  "300" : "Total records",
  "202" : "Rejected lines",
  "301" : "Loaded records",
  "302" : "Rejected records"
},
"progress" : 100
}

```

## List a Job Group

The List a Job Group REST API returns data for each job in a batch group.

The API uses the GET method.

### Request URL

The List a Job Group URL has the following format:

```
http://<host>:<port>/<jobcontrol>/<orsId>/<groupBy>
```

Make the following HTTP GET request to the List a Job Group URL:

```
GET http://<host>:<port>/<jobcontrol>/<orsId>/<groupBy>
```

### Parameters

Specify the parameters to return data for each job in a batch group.

The following table describes the parameters in the request body:

Parameter	Description
orsID	Operational reference store ID of the database to retrieve the mapping from.
groupBy	Optional. Groups jobs by the type of job requested.
jobGroupControlId	Specify the batch job group control ID.

## Sample API Request

The following sample request returns data for each job in a batch group:

```
GET /cmx/jobcontrol/localhost-orcl-MDM_SAMPLE/group?jobGroupType=IMPORT HTTP/1.1
Host: localhost:8080
```

## Sample API Response

The following sample response shows data for each job in a batch group:

```
HTTP/1.1 200 OK
Server: JBoss-EAP/7
X-Powered-By: Undertow/1
Content-Type: application/json;charset=UTF-8
Content-Length: 564

{
  "records" : [ {
    "jobGroupControlId" : "SVR1.1G7UY",
    "startDate" : "2020-01-13T13:06:26.649-05:00",
    "status" : "PENDING",
    "parameters" : { },
    "metricLabels" : { }
  }, {
    "jobGroupControlId" : "SVR1.1G61Y",
    "startDate" : "2020-01-13T12:39:42.152-05:00",
    "endDate" : "2020-01-13T12:40:03.221-05:00",
    "status" : "COMPLETED_WITH_ERRORS",
    "statusMessage" : "Completed with errors/warnings",
    "parameters" : { },
    "metricLabels" : { }
  } ],
  "totalCount" : 2,
  "firstRecord" : 1,
  "pageSize" : 10
}
```

## Get DaaS Metadata

The Get DaaS Metadata REST API returns information about a DaaS provider, such as the name, the type, the business entity it works with, and the list of required fields.

The API uses the GET method.

### Request URL

The Get DaaS Metadata URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/meta/daas/<providerName>
```

Make the following HTTP GET request to the Get DaaS Metadata URL:

```
GET http://<host>:<port>/<context>/<database ID>/meta/daas/<providerName>
```

### Query Parameter

The `providerName` parameter is a required parameter. The parameter is the name of the configured DaaS provider.

## Sample API Request

The following sample request returns the metadata information of the `dcp` DaaS provider:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/meta/daas/dcp
```

The following sample request returns the metadata information of the `ondemand` DaaS provider:

```
GET http://localhost:8080/cmxcsllocalhost-orcl-DS_UI1/meta/daas/ondemand
```

## Sample API Response

The following example shows the metadata information of the `dcp` DaaS provider in JSON format:

```
{
  providerName: "dcp",
  providerType: "READ",
  businessEntity: "Organization",
  systemName: "SFA",
  requiredFields: [
    "dunsNumber"
  ]
}
```

The following example shows the metadata information of the `ondemand` DaaS provider in JSON format:

```
{
  providerName: "ondemand",
  providerType: "SEARCH",
  businessEntity: "Organization",
  systemName: "SFA",
  requiredFields: [
    "displayName"
  ]
}
```

## DaaS Search

The DaaS Search REST API uses some input fields of a business entity to call an external DaaS service and transforms the response into a list of records.

The API uses the POST method.

### Request URL

The DaaS Search URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/daas/search/<daas provider>
```

Make the following HTTP POST request to the DaaS Search URL:

```
POST http://<host>:<port>/<context>/<database ID>/daas/search/<daas provider>
```

**Note:** In the request body, provide the details of the business entity with the required field.

### Request Body

The request body must contain an XML element or a JSON element of the type `Organization` or `OrganizationView` from the `urn:co-ors.informatica.mdm` namespace.

### Sample API Request

The following example is a request to the DaaS provider `ondemand` to search for the `organization` business entity with the display name `INFA`:

```
POST http://localhost:8080/cmxcsllocalhost-orcl-MDM_SAMPLE/daas/search/ondemand
{
  "Organization": {
    "displayname": "INFA"
  }
}
```



## Sample API Response

The following sample response shows the results of a search that the DaaS provider returns for the organization business entity with the display name INFA:

```
{
  "link": [],
  "item": [
    {
      "businessEntity": {
        "Organization": {
          "displayName": "INFA LAB INC",
          "dunsNumber": "001352574",
          "TelephoneNumbers": {
            "link": [],
            "item": [
              {
                "phoneNum": "9736252265"
              }
            ]
          },
          "Addresses": {
            "link": [],
            "item": [
              {
                "Address": {
                  "cityName": "ROCKAWAY",
                  "addressLine1": "11 WALL ST",
                  "postalCd": "07866",
                  "stateCd": {
                    "stateAbbreviation": "NJ"
                  }
                }
              }
            ]
          }
        }
      },
      "label": "001352574-INFA LAB INC",
      "systemName": "SFA"
    },
    {
      "businessEntity": {
        "Organization": {
          "displayName": "INFA INC",
          "dunsNumber": "007431013",
          "TelephoneNumbers": {
            "link": [],
            "item": [
              {
                "phoneNum": "5629019971"
              }
            ]
          },
          "Addresses": {
            "link": [],
            "item": [
              {
                "Address": {
                  "cityName": "LONG BEACH",
                  "addressLine1": "3569 GARDENIA AVE",
                  "postalCd": "90807",
                  "stateCd": {
                    "stateAbbreviation": "CA"
                  }
                }
              }
            ]
          }
        }
      }
    }
  ]
},
```

```

    "label": "007431013-INFA INC",
    "systemName": "SFA"
  },
  {
    "businessEntity": {
      "Organization": {
        "displayName": "INFA INC",
        "dunsNumber": "020591086",
        "TelephoneNumbers": {
          "link": [],
          "item": [
            {
              "phoneNum": "7186248777"
            }
          ]
        }
      },
      "Addresses": {
        "link": [],
        "item": [
          {
            "Address": {
              "cityName": "BROOKLYN",
              "addressLine1": "16 COURT ST STE 2004",
              "postalCd": "11241",
              "stateCd": {
                "stateAbbreviation": "NY"
              }
            }
          }
        ]
      }
    }
  },
  "label": "020591086-INFA INC",
  "systemName": "SFA"
},
{
  "businessEntity": {
    "Organization": {
      "displayName": "INFA INC",
      "dunsNumber": "604057286",
      "TelephoneNumbers": {
        "link": [],
        "item": [
          {
            "phoneNum": "8473580802"
          }
        ]
      }
    },
    "Addresses": {
      "link": [],
      "item": [
        {
          "Address": {
            "cityName": "PALATINE",
            "addressLine1": "THE HARRIS BANK BLDG STE 614,800E NW HWY",
            "postalCd": "60074",
            "stateCd": {
              "stateAbbreviation": "IL"
            }
          }
        }
      ]
    }
  }
},
"label": "604057286-INFA INC",
"systemName": "SFA"
},
{
  "businessEntity": {

```

```

"Organization": {
  "displayName": "INFA INC",
  "dunsNumber": "032785606",
  "TelephoneNumbers": {
    "link": [],
    "item": [
      {
        "phoneNum": "5629019971"
      }
    ]
  },
  "Addresses": {
    "link": [],
    "item": [
      {
        "Address": {
          "cityName": "SIMI VALLEY",
          "addressLine1": "3962 HEMWAY CT",
          "postalCd": "93063",
          "stateCd": {
            "stateAbbreviation": "CA"
          }
        }
      }
    ]
  }
},
"label": "032785606-INFA INC",
"systemName": "SFA"
},
{
  "businessEntity": {
    "Organization": {
      "displayName": "INFA",
      "dunsNumber": "045228877",
      "TelephoneNumbers": {
        "link": [],
        "item": [
          {
            "phoneNum": "3304410033"
          }
        ]
      },
      "Addresses": {
        "link": [],
        "item": [
          {
            "Address": {
              "cityName": "NORTON",
              "addressLine1": "4725 ROCK CUT RD",
              "postalCd": "44203",
              "stateCd": {
                "stateAbbreviation": "OH"
              }
            }
          }
        ]
      }
    }
  },
  "label": "045228877-INFA",
  "systemName": "SFA"
},
{
  "businessEntity": {
    "Organization": {
      "displayName": "INFA INC",
      "dunsNumber": "609028209",
      "TelephoneNumbers": {
        "link": [],

```

```

        "item": [
            {
                "phoneNum": "9084394655"
            }
        ]
    },
    "Addresses": {
        "link": [],
        "item": [
            {
                "Address": {
                    "cityName": "CALIFON",
                    "addressLine1": "21 FAIRMOUNT RD W",
                    "postalCd": "07830",
                    "stateCd": {
                        "stateAbbreviation": "NJ"
                    }
                }
            }
        ]
    }
},
"label": "609028209-INFA INC",
"systemName": "SFA"
},
{
    "businessEntity": {
        "Organization": {
            "displayName": "INFA INC",
            "dunsNumber": "195271796",
            "TelephoneNumbers": {
                "link": [],
                "item": [
                    {
                        "phoneNum": "7137824181"
                    }
                ]
            }
        },
        "Addresses": {
            "link": [],
            "item": [
                {
                    "Address": {
                        "cityName": "HOUSTON",
                        "addressLine1": "1800 AUGUSTA DR STE 200",
                        "postalCd": "77057",
                        "stateCd": {
                            "stateAbbreviation": "TX"
                        }
                    }
                }
            ]
        }
    }
},
"label": "195271796-INFA INC",
"systemName": "SFA"
},
{
    "businessEntity": {
        "Organization": {
            "displayName": "INFA INC",
            "dunsNumber": "098605830",
            "Addresses": {
                "link": [],
                "item": [
                    {
                        "Address": {
                            "cityName": "BELLFLOWER",
                            "postalCd": "90707",

```



## Sample API Response

The following sample response shows the details that the DaaS provider returned for the organization whose D-U-N-S number is 001352574:

```
{
  "Organization": {
    "displayName": "Infa Lab Inc",
    "dunsNumber": "001352574",
    "TelephoneNumbers": {
      "link": [],
      "item": [
        {
          "phoneNum": "09736250550"
        }
      ]
    },
    "Addresses": {
      "link": [],
      "item": [
        {
          "Address": {
            "cityName": "Rockaway",
            "addressLine1": "11 WALL ST"
          }
        }
      ]
    }
  }
}
```

## WriteMerge

The WriteMerge REST API accepts a list of records retrieved from a DaaS provider, persists them in separate XREFs with the appropriate source system, and merges them into a single record. All XREFs belong to the same record.

The API uses the POST method.

### Request URL

The WriteMerge URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/daas/write-merge/<business entity name>
```

Make the following HTTP POST request to the WriteMerge URL:

```
POST http://<host>:<port>/<context>/<database ID>/daas/write-merge/<business entity name>
```

### Request Body

The request body should contain an XML or JSON element of the type `DaaSEntity.Pager` from the `urn:cobase.informatica.mdm` namespace.

### Response Header

When the response is successful, the API returns the `interactionId` and the `processId` in the response header.

## Sample API Request

The following sample request uses the result of a DaaS search as input to create a record of the Organization business entity type:

```
POST http://localhost:8080/cmx/cs/localhost-orcl-MDM_SAMPLE/daas/write-merge/Organization
{
  "item": [
    {
      "businessEntity": {
        "Organization": {
          "displayName": "INFA LAB INC",
          "dunsNumber": "001352574",
          "TelephoneNumbers": {
            "item": [
              {
                "phoneNum": "9736252265"
              }
            ]
          }
        }
      },
      "systemName": "DNB"
    },
    {
      "businessEntity": {
        "Organization": {
          "displayName": "INFA INC",
          "dunsNumber": "007431013",
          "TelephoneNumbers": {
            "item": [
              {
                "phoneNum": "5629019971"
              }
            ]
          }
        }
      },
      "systemName": "Admin"
    }
  ]
}
```

## Sample API Response

The following sample response shows the response header and body after successfully merging the list of records into a single record:

```
{
  "Organization": {
    "key": {
      "rowid": "121921",
      "sourceKey": "140000000000"
    },
    "rowidObject": "121921",
    "TelephoneNumbers": {
      "link": [],
      "item": [
        {
          "key": {
            "rowid": "21721",
            "sourceKey": "140000001000"
          },
          "rowidObject": "21721"
        }
      ]
    }
  }
}
```

# DaaS Import

The DaaS Import REST API accepts data in an XML format and converts it into a record.

The API uses the POST method.

## Request URL

The Import DaaS Data URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/daas/import/  
FamilyTreeMemberOrganizationToOrgView
```

Make the following HTTP POST request to the Import DaaS Data URL:

```
POST http://<host>:<port>/<context>/<database ID>/daas/import/  
FamilyTreeMemberOrganizationToOrgView
```

## Query Parameters

The name of the source system is a required parameter.

The following table lists the parameters that you can use in the request:

Parameter	Description
systemName	Required. Name of the source system which performs the data change.
interactionId	Optional. Interaction ID to assign to all the changes. Usually, the Hub generates the ID when it creates a pending change as the result of a call.
effectivePeriod	Optional. Contains the start date and end date. Specifies the period of time for which the record is effective. Provide these parameters for a timeline-enabled record.
validateOnly	Optional. If set to TRUE, only validation rules are applied to the modified record and the changes are not persisted.
recordState	Optional. Hub state for the created or the updated records. The supported record states are ACTIVE and PENDING.
processId	Optional. ID of the workflow process that contains the task. When a workflow is started as result of the service call, the parameter contains the identifier of the started workflow process.

## RELATED TOPICS:

- [“Formats for Dates and Time in UTC” on page 30](#)

## Request Body

The request body must contain an XML or a JSON element of the type

DaaSChangeFamilyTreeMemberOrganizationToOrgView from the urn:co-ors.informatica.mdm namespace.



## Response Header

When the response is successful, the API returns the interactionId and the processId in the response header and the record details in the response body.

If the process generates an interaction ID and uses it to create the record, the API returns the interaction ID. If the process starts a workflow instead of directly saving the record to the database, the API returns the process ID which is the ID of the workflow process.

The following example shows a response header with an interaction ID and a process ID:

```
BES-interactionId: 72200000242000
BES-processId: 15948
```

## Sample API Request

The request is always in the XML format.

The following sample request shows XML data of the type ChildAssociation from the linkage namespace:

```
POST http://localhost:8080/cmx/cs/localhost-orcl-MDM_SAMPLE/daas/import/linkage2org?
systemName=Admin
<FamilyTreeMemberOrganization xmlns="http://services.dnb.com/LinkageServiceV2.0"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ChildAssociation">
  <AssociationTypeText>ParentSubsidiary</AssociationTypeText>
  <OrganizationName>
    <OrganizationPrimaryName>
      <OrganizationName>INFORMATICA JAPAN K.K.</OrganizationName>
    </OrganizationPrimaryName>
  </OrganizationName>
  <SubjectHeader>
    <DUNSNumber>697557825</DUNSNumber>
  </SubjectHeader>
  <Location>
    <PrimaryAddress>
      <StreetAddressLine>
        <LineText>2-5-1, ATAGO</LineText>
      </StreetAddressLine>
      <StreetAddressLine>
        <LineText>ATAGO GREEN HILLS MORI TOWER 26F.</LineText>
      </StreetAddressLine>
      <PrimaryTownName>MINATO-KU</PrimaryTownName>
      <CountryISOAlpha2Code>JP</CountryISOAlpha2Code>
      <TerritoryAbbreviatedName>TKY</TerritoryAbbreviatedName>
      <PostalCode>105-0002</PostalCode>
      <TerritoryOfficialName>TOKYO</TerritoryOfficialName>
    </PrimaryAddress>
  </Location>
  <OrganizationDetail>
    <FamilyTreeMemberRole>
      <FamilyTreeMemberRoleText>Subsidiary</FamilyTreeMemberRoleText>
    </FamilyTreeMemberRole>
    <FamilyTreeMemberRole>
      <FamilyTreeMemberRoleText>Headquarters</FamilyTreeMemberRoleText>
    </FamilyTreeMemberRole>
    <StandaloneOrganizationIndicator>>false</StandaloneOrganizationIndicator>
  </OrganizationDetail>
  <Linkage>
    <LinkageSummary>
      <ChildrenSummary>
        <ChildrenQuantity>1</ChildrenQuantity>
        <DirectChildrenIndicator>>false</DirectChildrenIndicator>
      </ChildrenSummary>
      <ChildrenSummary>
        <ChildrenTypeText>Affiliate</ChildrenTypeText>
        <ChildrenQuantity>29</ChildrenQuantity>
        <DirectChildrenIndicator>>false</DirectChildrenIndicator>
      </ChildrenSummary>
    </LinkageSummary>
  </Linkage>
</FamilyTreeMemberOrganization>
```

```

        <ChildrenTypeText>Branch</ChildrenTypeText>
        <ChildrenQuantity>1</ChildrenQuantity>
        <DirectChildrenIndicator>true</DirectChildrenIndicator>
    </ChildrenSummary>
    <SiblingCount>29</SiblingCount>
</LinkageSummary>
<GlobalUltimateOrganization>
    <DUNSNumber>825320344</DUNSNumber>
</GlobalUltimateOrganization>
<DomesticUltimateOrganization>
    <DUNSNumber>697557825</DUNSNumber>
</DomesticUltimateOrganization>
<ParentOrganization>
    <DUNSNumber>825320344</DUNSNumber>
</ParentOrganization>
<FamilyTreeMemberOrganization>
    <AssociationTypeText>HeadquartersBranch</AssociationTypeText>
    <OrganizationName>
        <OrganizationPrimaryName>
            <OrganizationName>INFORMATICA JAPAN K.K.</OrganizationName>
        </OrganizationPrimaryName>
    </OrganizationName>
    <SubjectHeader>
        <DUNSNumber>692640710</DUNSNumber>
        <SubjectHandling>
            <SubjectHandlingText DNBCodeValue="11028">De-listed</
SubjectHandlingText>
        </SubjectHandling>
    </SubjectHeader>
    <Location>
        <PrimaryAddress>
            <StreetAddressLine>
                <LineText>2-2-2, UMEDA, KITA-KU</LineText>
            </StreetAddressLine>
            <PrimaryTownName>OSAKA</PrimaryTownName>
            <CountryISOAlpha2Code>JP</CountryISOAlpha2Code>
            <TerritoryAbbreviatedName>OSK</TerritoryAbbreviatedName>
            <PostalCode>530-0001</PostalCode>
            <TerritoryOfficialName>OSAKA</TerritoryOfficialName>
        </PrimaryAddress>
    </Location>
    <OrganizationDetail>
        <FamilyTreeMemberRole>
            <FamilyTreeMemberRoleText>Branch</FamilyTreeMemberRoleText>
        </FamilyTreeMemberRole>
        <StandaloneOrganizationIndicator>>false</StandaloneOrganizationIndicator>
    </OrganizationDetail>
    <Linkage>
        <GlobalUltimateOrganization>
            <DUNSNumber>825320344</DUNSNumber>
        </GlobalUltimateOrganization>
        <DomesticUltimateOrganization>
            <DUNSNumber>697557825</DUNSNumber>
        </DomesticUltimateOrganization>
        <HeadquartersOrganization>
            <DUNSNumber>697557825</DUNSNumber>
        </HeadquartersOrganization>
        <FamilyTreeHierarchyLevel>2</FamilyTreeHierarchyLevel>
    </Linkage>
    </FamilyTreeMemberOrganization>
    <FamilyTreeHierarchyLevel>2</FamilyTreeHierarchyLevel>
</Linkage>
</FamilyTreeMemberOrganization>

```

## Sample API Response

The following sample response shows the response header and body after successfully importing and creating an Organization business entity:

```
BES-interactionId: 72202100242034
BES-processId: 156048
{
  "Organization": {
    "key": {
      "rowid": "101921",
      "sourceKey": "697557825"
    },
    "rowidObject": "101921"
  }
}
```

## DaaS Update

The DaaS Update REST API accepts the data in an XML format before and after a change. The API applies the changes to the record.

The API uses the POST method.

### Request URL

The DaaS Update URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/daas/update/
FamilyTreeMemberOrganizationToOrgView
```

Make the following HTTP POST request to the DaaS Update URL:

```
POST http://<host>:<port>/<context>/<database ID>/daas/update/
FamilyTreeMemberOrganizationToOrgView
```

### Query Parameters

The name of the source system is a required parameter.

The following table lists the parameters that you can use in the request:

Parameter	Description
systemName	Required. Name of the source system which performs the data change.
interactionId	Optional. Interaction ID to assign to all the changes. Usually, the Hub generates the ID when it creates a pending change as the result of a call.
effectivePeriod	Optional. Contains the start date and end date. Specifies the period of time for which the record is effective. Provide these parameters for a timeline-enabled record.
validateOnly	Optional. If set to TRUE, only validation rules are applied to the modified record and the changes are not persisted.
recordState	Optional. Hub state for the created or the updated records. The supported record states are ACTIVE and PENDING.
processId	Optional. ID of the workflow process that contains the task. When workflow is started as result of the service call, the parameter contains the identifier of the started workflow process.

## RELATED TOPICS:

- [“Formats for Dates and Time in UTC” on page 30](#)

## Request Body

The request body must contain an XML or a JSON element of the type

DaaSChangeFamilyTreeMemberOrganizationToOrgView from the `urn:co-ors.informatica.mdm` namespace.

## Response Header

When the response is successful, the API returns the `interactionId` and the `processId` in the response header and the record details in the response body.

If the process generates an interaction ID and uses it to create the record, the API returns the interaction ID. If the process starts a workflow instead of directly saving the record to the database, the API returns the process ID which is the ID of the workflow process.

The following example shows a response header with an interaction ID and a process ID:

```
BES-interactionId: 72200000242000
BES-processId: 15948
```

## Sample API Request

The API accepts two responses in XML format, one response is before a change and the other response is after the change. In the following request, a new phone number is added to the organization. The `before` XML data does not have the phone number, the `after` XML data has the phone number.

The following request contains the newly added phone number:

```
POST http://localhost:8080/cmx/cs/localhost-orcl-MDM_SAMPLE/daas/update/linkage2org?
systemName=Admin
<urn:DaaSChangelinkage2org xmlns:urn="urn:cs-ors.informatica.mdm" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance" xsi:type="urn:DaaSChangelinkage2org">
  <urn:before xmlns="http://services.dnb.com/LinkageServiceV2.0">
    <SubjectHeader>
      <DUNSNumber>697557825</DUNSNumber>
    </SubjectHeader>
  </urn:before>

  <urn:after xmlns="http://services.dnb.com/LinkageServiceV2.0">
    <SubjectHeader>
      <DUNSNumber>697557825</DUNSNumber>
    </SubjectHeader>
    <Telecommunication>
      <TelephoneNumber>
        <TelecommunicationNumber>09736250550</TelecommunicationNumber>
        <InternationalDialingCode>1</InternationalDialingCode>
        <UnreachableIndicator>true</UnreachableIndicator>
      </TelephoneNumber>
    </Telecommunication>
  </urn:after>
</urn:DaaSChangelinkage2org>
```

## Sample API Response

The following example shows the `rowId` of the newly created telephone number of the organization:

```
{
  "Organization": {
    "key": {
      "rowid": "101921",
```

```
    "sourceKey": "697557825"
  },
  "rowidObject": "101921",
  "TelephoneNumbers": {
    "link": [],
    "item": [
      {
        "key": {
          "rowid": "1722",
          "sourceKey": "09736250550"
        },
        "rowidObject": "1722"
      }
    ]
  }
}
```

## CHAPTER 4

# SOAP Business Entity Service Calls

This chapter includes the following topics:

- [SOAP Calls for Business Entity Services Overview, 246](#)
- [Authentication method, 247](#)
- [Authentication Cookies for Login from Third-Party Applications, 247](#)
- [Web Services Description Language File, 248](#)
- [SOAP URL, 249](#)
- [SOAP Requests and Responses, 249](#)
- [Viewing Input and Output Parameters, 250](#)
- [SOAP API Reference, 251](#)
- [Sample SOAP Request and Response, 253](#)

## SOAP Calls for Business Entity Services Overview

Simple Object Access Protocol (SOAP) endpoint calls make all business entity services available as web services. You can make SOAP calls to create, delete, update, and search for records in a business entity. You can perform operations, such as merge, unmerge, and match records. You can also make SOAP calls to create, update, and search for tasks and perform tasks.

The SOAP endpoints for business entity services use the Web Services Security (WS-Security) UsernameToken to authenticate users.

**Note:** Before you use the SOAP APIs to call the business entity services, validate the Operational Reference Store.

# Authentication method

All SOAP calls to the business entity services require user authentication. Provide the user name and password in the SOAP message header of the web service request.

The SOAP header element Security contains the security-related data. The Security element contains the UsernameToken element which has the following child elements:

**username**

User name associated with the token.

**password**

Password for the user name associated with the token.

Send the user name and password in the UsernameToken element.

The following example shows the Security header element in the SOAP message:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:urn="urn:cs-ors.informatica.mdm">
  <soapenv:Header>
    <Security xmlns="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-secext-1.0.xsd">
      <UsernameToken>
        <Username>admin</Username>
        <Password>admin</Password>
      </UsernameToken>
    </Security>
  </soapenv:Header>
  <soapenv:Body>
    .....
  </soapenv:Body>
</soapenv:Envelope>
```

## Authentication Cookies for Login from Third-Party Applications

Use authentication cookies to authenticate the MDM Hub users and call the business entity services from third-party applications. You can obtain a cookie based on the credentials of an authenticated user. Save the cookie and use it to call the SOAP APIs. You need not hard-code the user name and password.

Make the following POST request to log in to the Entity 360 View with your user name and password:

```
POST http://<host>:<port>/e360/com.informatica.tools.mdm.web.auth/login
{
  user: 'admin',
  password: 'user password'
}
```

When the login operation is successful, the server returns the authentication cookie in the `set-cookie` header field. The following sample code shows a `set-cookie` in the response header:

```
Set-Cookie: auth_hash_cookie="admin===QTc1RkNGQkNCMzc1RjIyOQ==";
Version=1; Path=/
```

Store the hash and use it in the request header of your API calls. You need not provide a user name and a password for the API calls.

The following example shows how to use an authentication cookie in your API request header:

```
GET http://<IP of host>/cmx/cs/localhost-orcl-DS_UI1
Cookie: auth_hash_cookie="admin===QTc1RkNGQkNCMzc1RjIyOQ=="
```

## Web Services Description Language File

Web Services Description Language (WSDL) files contain the XML descriptions of the web services, formats of the SOAP requests and responses, and all parameters. The MDM Hub generates a WSDL file for each Operational Reference Store.

The WSDL files for each Operational Reference Store are in the following location:

```
http://<host>:<port>/cmx/csfiles
```

The following image shows the location where you can download the WSDL file for the Operational Reference Stores:

### **localhost-rome-TCR\_HUB**

[cs-rest.xsd \(urn:cs-rest.informatica.mdm\)](#)  
[cs-base.xsd \(urn:cs-base.informatica.mdm\)](#)  
[co-base.xsd \(urn:co-base.informatica.mdm\)](#)  
[co-types.xsd \(urn:co-types.informatica.mdm\)](#)  
[D&BDetailedCompanyProfile\\_0.xsd \(http://www.strikeiron.com\)](#)  
[D&BDetailedCompanyProfile\\_1.xsd \(http://services.dnb.com/FirmographicsProductServiceV2.0\)](#)  
[D&BDetailedCompanyProfile\\_2.xsd \(http://ws.strikeiron.com\)](#)  
[D&BOnDemandEntitySearch\\_1.xsd \(http://services.dnb.com/CompanyServiceV2.0\)](#)  
[D&BOnDemandEntitySearch\\_0.xsd \(http://www.strikeiron.com\)](#)  
[D&BOnDemandEntitySearch\\_2.xsd \(http://ws.strikeiron.com\)](#)  
[co-ors.xsd \(urn:co-ors.informatica.mdm\)](#)  
[cs-ors.xsd \(urn:cs-ors.informatica.mdm\)](#)  
[co-meta.xsd \(urn:co-meta.informatica.mdm\)](#)  
[task-base.xsd \(urn:task-base.informatica.mdm\)](#)

[localhost-rome-TCR\\_HUB.wsdl](#)

---

### **localhost-rome-CMX\_ORIS**

[cs-rest.xsd \(urn:cs-rest.informatica.mdm\)](#)  
[cs-base.xsd \(urn:cs-base.informatica.mdm\)](#)  
[co-base.xsd \(urn:co-base.informatica.mdm\)](#)  
[co-types.xsd \(urn:co-types.informatica.mdm\)](#)  
[co-ors.xsd \(urn:co-ors.informatica.mdm\)](#)  
[cs-ors.xsd \(urn:cs-ors.informatica.mdm\)](#)  
[co-meta.xsd \(urn:co-meta.informatica.mdm\)](#)  
[task-base.xsd \(urn:task-base.informatica.mdm\)](#)

[localhost-rome-CMX\\_ORIS.wsdl](#)

Click the link to download the WSDL file for the available Operational Reference Stores.



# SOAP URL

A SOAP URL is the address you use to connect to the SOAP server.

A SOAP URL has the following syntax:

```
http://<host>:<port>/<context>/<database ID>
```

The URL has the following fields:

**host**

The host that runs the database.

**port**

Port number that the database listener uses.

**context**

The context is always `cmx/services/BEServices`.

**database ID**

ID of the ORS as registered in the Databases tool in the Hub Console.

The following example shows a SOAP URL:

```
http://localhost:8080/cmx/services/BEServices/localhost-orcl-DS_UI1
```

## SOAP Requests and Responses

Use the SOAP XML message format to send requests through a SOAP client to the business entity service and to receive responses from the business entity service to the client. The SOAP request and response format is the same.

A SOAP message contains the following elements:

**Envelope**

Defines the start and the end of the message.

**Header**

Optional. Contains additional attributes, such as authentication details for processing the message. If the Header element is present, it must be the first child element of the Envelope element.

**Body**

Contains the XML data that the client or the web service processes.

A SOAP message has the following format:

```
<?xml version="1.0"?>
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" >

  <env:Header>
  </env:Header>

  <env:Body>
  </env:Body>

</env:Envelope>
```

A SOAP request has the following format:

```
POST /<host>:<port>/<context>/<database ID> HTTP/1.0
Content-Type: text/xml; charset=utf-8

<?xml version="1.0"?>
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" >

  <env:Header>
  </env:Header>

  <env:Body>
  </env:Body>

</env:Envelope>
```

A SOAP response has the following format:

```
HTTP/1.0 200 OK
Content-Type: text/xml; charset=utf-8

<?xml version="1.0"?>
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" >

  <env:Header>
  </env:Header>

  <env:Body>
  </env:Body>


</env:Envelope>
```

## Viewing Input and Output Parameters

You can use a functional testing tool, such as SoapUI, to view SOAP API input and output parameters.

Create a SOAP project and import the WSDL file into the project. The operations you can perform using the business entity services appear as nodes in SoapUI. Each operation has a request and a response message format. SoapUI creates a sample request for each operation when you import the WSDL file.

Open the project and double-click a request to open the request editor. The following image shows the input parameters in SoapUI for the WritePerson SOAP API:

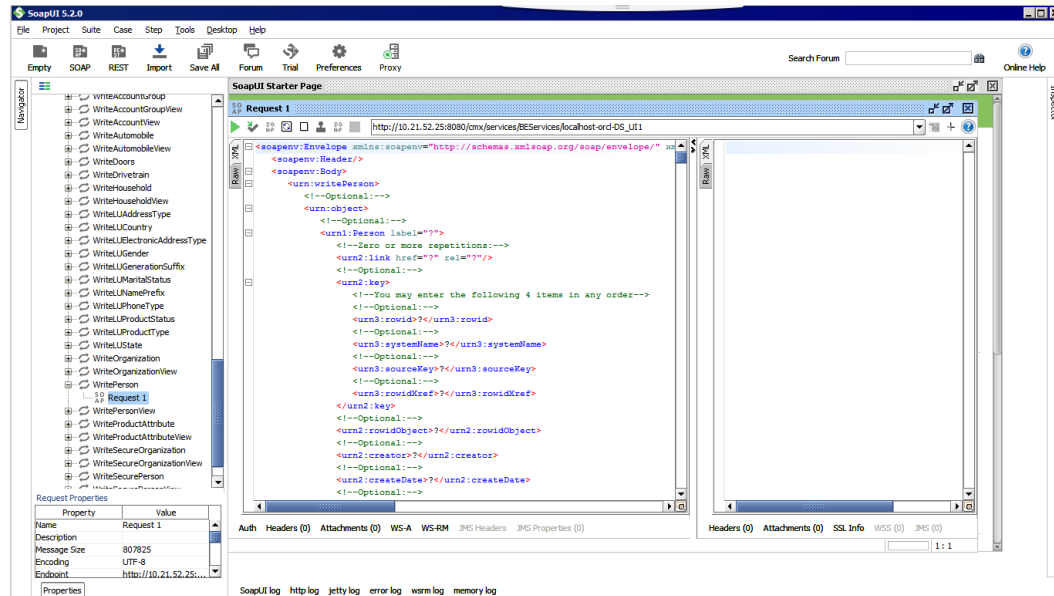

## SOAP API Reference

The SOAP API reference for business entity services lists the SOAP APIs and provides a description for each API. Also refer to the WSDL file for descriptions of the business entity services.

Use the following SOAP APIs to perform operations on business entities:

### Get Metadata

Returns the data structure of a business entity.

### List Record

Returns the list of lookup values or foreign key values.

### Read Record

Returns the details of a root record in the business entity.

### Create Record

Creates a record in the specified business entity.

### Update Record

Updates the specified root record and its child records.

### Delete Record

Deletes a root record in a business entity.

### Search Record

Searches a string value in a searchable root business entity and returns the root records that match the search criteria.

**Preview Promote**

Returns a preview of a resulting record if you promote pending changes based on the interaction ID of the change request.

**Promote**

Promotes all pending changes made to a record based on the interaction ID of the change request.

**Delete Promote**

Deletes all pending changes that you make to a record based on the interaction ID of the change request.

**Preview Merge**

Returns a preview of a consolidated root record if you merge two or more root records.

**Merge Records**

Merges two or more root records to create a single consolidated record.

**Unmerge Records**

Unmerges a root record into individual root records that existed before the records were merged.

**Get Related Records**

Returns a list of related records based on the relationships that you configure in the Hierarchy Manager.

**Read Matched Records**

Returns records that match a specified root record.

**Update Matched Records**

Creates or updates a record in the match table.

**Delete Matched Records**

Deletes matched records from the match table.

**Get BPM Metadata**

Returns the task types and two indicators that specify whether the workflow adapter can perform the Get Task Lineage service and the administration services.

**List Tasks**

Returns a list of workflow tasks.

**Read Task**

Returns the details of a task.

**Create Task**

Creates a task and starts a workflow.

**Update Task**

Updates a single task.

**Execute Task Action**

Performs a task action and sets the task back to the workflow for further processing.

**List Assignable Users**

Returns a list of users to whom you can assign the tasks that belong to a task type.

**Task Complete**

Closes a task workflow after you complete all the tasks in the workflow.

# Sample SOAP Request and Response

The following sample SOAP request retrieves a list of assignable users:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:urn="urn:cs-ors.informatica.mdm">
  <soapenv:Header>
    <Security xmlns="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-
secext-1.0.xsd">
      <UsernameToken>
        <Username>admin</Username>
        <Password>admin</Password>
      </UsernameToken>
    </Security>
  </soapenv:Header>
  <soapenv:Body>
    <urn:listAssignableUsers>
      <!--Optional:-->
      <urn:parameters>
        <!--Optional:-->
        <urn:taskType>Update</urn:taskType>
        <!--Optional:-->
        <urn:businessEntity>Person</urn:businessEntity>
      </urn:parameters>
    </urn:listAssignableUsers>
  </soapenv:Body>
</soapenv:Envelope>
```

The following sample SOAP response lists the assignable users:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance">
  <soapenv:Body>
    <ns6:listAssignableUsersReturn xmlns:ns1="urn:cs-base.informatica.mdm"
xmlns:ns2="urn:co-base.informatica.mdm" xmlns:ns3="urn:co-ors.informatica.mdm"
xmlns:ns4="urn:co-meta.informatica.mdm" xmlns:ns5="urn:task-base.informatica.mdm"
xmlns:ns6="urn:cs-ors.informatica.mdm">
      <ns6:object>
        <ns1:users>
          <user>
            <userName>admin</userName>
          </user>
        </users>
        <ns1:roles/>
      </ns6:object>
    </ns6:listAssignableUsersReturn>
  </soapenv:Body>
</soapenv:Envelope>
```

## CHAPTER 5

# Cross-reference Records and BVT Calculations Services

This chapter includes the following topics:

- [Cross-reference Records and BVT Calculations Services Overview, 254](#)
- [Getting Cross-reference Data and Investigating BVT Calculations, 254](#)
- [Filtering and Paginating Responses, 258](#)
- [Establish the Best Version of the Truth, 259](#)

## Cross-reference Records and BVT Calculations Services Overview

You can use the services for cross-reference records and best version of the truth (BVT) calculations to learn how the source data forms the master record.

You can use these services to perform the following tasks:

- gather information about the source data
- determine how the best version of the truth was determined
- override the BVT calculations to ensure the master records contain the best version of the truth

## Getting Cross-reference Data and Investigating BVT Calculations

Master records in the MDM Hub maintain the best version of the truth (BVT). The MDM Hub consolidates the most trustworthy data from several source systems into each master record to achieve the best version of the truth. The MDM Hub stores source data in cross-reference records. You can use business entity services to read data from the cross-reference records and determine how the BVT was calculated.

## Get Cross-reference Records

You can use a business entity service to get the cross-reference records for a particular master record.

The REST API URL to get cross-reference records has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<row ID>?
contentMetadata=XREF
```

The following sample request retrieves cross-reference records for a Person business entity record with a row ID of 123:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-ORS/Person/123?contentMetadata=XREF
```

## Get Cross-reference Records Response

The following example shows the cross-reference records that are returned for the Person record with a row ID of 123:

```
GET /Person/123?contentMetadata=XREF
```

```
{
  "firstName": "Joe",
  "lastName": "Smith",
  "XREF": {
    "item": [
      {
        "rowidXref": 111,
        "firstName": "Joe",
        "lastName": "Smith",
      },
      {
        "rowidXref": 222,
        "firstName": "John",
        "lastName": "Smith"
      }
    ]
  }
}
```

## Determine Contributors to the Master Record

You can use business entity services to see which cross-reference record field contributes to the master record. The contributing record to each field is identified by the row ID of the cross-reference record.

The REST API URL to determine contributors to the master record has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<row ID>?
contentMetadata=BVT
```

The following sample request retrieves BVT information for a Person record with a row ID of 123:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-ORS/Person/123?contentMetadata=BVT
```

## Determine Contributors to the Master Record Response

The following example shows which cross-reference record contributed to each field in the master record:

```
{
  "firstName": "Joe",
  "lastName": "Smith",
  "BVT": {
    "firstName": {
      "rowidXref": 111
    }
  },
}
```

```

    "lastName": {
      "rowidXref": 222
    }
  },
}

```

## Get the Trust Scores of Contributing Cross-reference Record Fields

You can use business entity services to get the trust scores of cross-reference record fields that contribute to the master record.

The REST API URL to determine contributors and get the trust scores has the following format:

```

http://<host>:<port>/<context>/<database ID>/<business entity>/<row ID>?
contentMetadata=TRUST

```

The following sample request provides trust scores for a Person record with a row ID of 123:

```

GET http://localhost:8080/cmx/cs/ors/Person/123?contentMetadata=TRUST

```

## Get the Trust Scores of Contributing Cross-reference Record Fields Response

The following response example provides trust scores for each field in a Person business entity record:

```

{
  "firstName": "John",
  "lastName": "Smith",
  "TRUST": {
    "firstName": {
      "score": 75.0,
      "valid": true,
      "trustSetting" :{
        // custom settings
      }
    },
  },
}

```

## Getting the Trust Scores of All Cross-reference Record Fields

Use the REST API with the contentMetadata parameter set to XREF\_TRUST to get the trust scores and downgrade percentages of all cross-reference record fields.

The request URL for the Read REST API to determine contributors and get the trust scores:

```

http://<host>:<port>/<context>/<database ID>/<business entity>/<row ID>?
contentMetadata=XREF_TRUST

```

The following sample request retrieves cross-reference data for a Person record with a row ID of 123:

```

GET http://localhost:8080/cmx/cs/localhost-orcl-ORS/Person/123?contentMetadata=XREF_TRUST

```

## Get the Trust Scores of All Cross-reference Record Fields Response

The following example shows the trust scores and downgrade percentages of all cross-reference record fields for a Person business entity:

```

{
  "firstName": "Sergey",
  "lastName": "Ivanov",
  "XREF": {
    "item": [{
      "rowidXref": 111,
      "firstName": "Sergey",
      "lastName": "Petrov",
      "TRUST": {

```



```

        "firstName": {
            "score": 75.0,
            "valid": true
        },
        "lastName": {
            "score": 60.0,
            "valid": false,
            "downgradePerCent": 20.0
        }
    }
}, {
    "rowidXref": 222,
    "firstName": "Sergey",
    "lastName": "Ivanov",
    "TRUST": {
        "firstName": {
            "score": 10.0,
            "valid": true
        },
        "lastName": {
            "score": 80.0,
            "valid": true
        }
    }
}
]]
}
}

```

## Get Information about Source Systems

You can get information about which source systems the cross-reference data comes from, and how many cross-reference records the source systems contribute for the whole record, for each node, or for each record.

The following parameters can be specified in the request:

### **describe**

Set to `true` to return the description of the source system. Can be `true` or `false`. Default is `false`.

### **aggregate**

Defines for which level to return source system information. Can be `ENTITY`, `NODE`, and `RECORD`. Default is `ENTITY`.

### **recordStates**

Specifies the record state for which to return records. Can be `ACTIVE`, `PENDING`, or `DELETED`. Default is `ACTIVE`.

### **compact**

When set to `no`, specifies that the entity level data is returned when the aggregate parameter is specified with `ENTITY` and other aggregate levels. Can be `yes` or `no`. For REST API requests only. Default is `yes`.

## Get Information about Source Systems Example

The following sample request gets entity-level and node-level source system information for the Person business entity with a row ID of 123:

```

GET http://localhost:8080/cmx/cs/ors/Person/123?
action=getSourceSystems&aggregate=ENTITY,NODE&compact=no

```

The following sample request gets record-level source system information and the source system descriptions for the Person business entity with a row ID of 456:

```
GET http://localhost:8080/cmx/cs/ors/Person/123/Address/456?
action=getSourceSystems&aggregate=ENTITY,NODE&compact=no
```

## Get Information about Source Systems Response

The following example shows entity-level and node-level information for a Person business entity:

```
{
  "name": "Admin",
  "xrefCount": 120
},
Person: {
  "rowidObject": "456",
  "sourceSystem":
  {
    "name": "Admin",
    "xrefCount": 30
  }
}
```

# Filtering and Paginating Responses

You can select the fields to return in the response, filter results by several criteria, and paginate results.

## Filtering Request Examples

The following table shows sample requests for the Person Business entity with a variety of filters applied and a description of the results that are returned in the response:

Request	Description of returned results
/Person/123	All user-defined fields
/Person/123?readSystemFields=true	All user-defined fields and all system fields
/Person/123?fields=firstName	One user-defined field
/Person/123?fields=updatedAt	One system field
Person/123?fields=firstName,updatedAt	One user-defined field and one system field
/Person/123?fields=firstName&readsystemFields=true	One user-defined field and all system fields

# Establish the Best Version of the Truth

After a data steward investigates the source data in the cross-reference records, they can then make adjustments to how source data is consolidated to ensure that the master record represents the best version of the truth.

You can use business entity services to perform the following actions to establish the best version of the truth:

- Update the trust settings
- Remove mismatched source data
- Select the correct contributing field
- Write the correct value to the master record

## Select the Correct Contributing Field

If the field with the highest trust score does not contain the best version of the truth, a data steward can select the field that does contain the correct data to contribute the data to the master record.

The URL and request body to select the correct contributing field based on the system name and source key has the following format:

```
POST http://<host>:<port>/<context>/<database ID>/<business entity>/<row ID>?
systemName=<source system name>
{
  BVT: {
    <field name>: {
      systemName: "<source system name>",
      sourceKey: "<source key>"
    }
  }
}
```

The URL and request body to select the correct contributing field based on the cross-reference record ID has the following format:

```
POST http://<host>:<port>/<context>/<database ID>/<business entity>/<row ID>?
systemName=<source system name>
{
  BVT: {
    <field name>: {
      rowidXref: "<row ID>"
    }
  }
}
```

## Select the Correct Contributing Field Example

The following URL and request body selects the first name field of the cross-reference record from the Sales source system with a source key of 0001 to contribute to the master record:

```
POST http://localhost:8080/cmx/cs/localhost-orcl-ORS/Person/123?systemName=Admin
{
  BVT: {
    firstName: {
      systemName: "Sales",
      sourceKey: "0001"
    }
  }
}
```

The following URL and request body selects the first name field of the cross-reference record with a row ID of 789 to contribute to the master record:

```
POST http://localhost:8080/cmx/cs/localhost-orcl-ORS/Person/123?systemName=Admin
{
  BVT: {
    firstName: {
      rowidXref: "789"
    }
  }
}
```

## Write the Correct Value to the Master Record

When you use a business entity service call to write a correct value to a master record, you also can establish the trust settings for the value. If you do not specify trust settings, the MDM Hub uses the administrator system settings.

The URL and request body to write the correct value with the administrator trust setting has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<row ID>?
systemName=<source system providing the correct value>{
  "<field name>": "<correct value>",
  "$original": {
    "<field name>": "<current value>",
  },
  "TRUST": {
    "<field name>": {
      "trustSetting" : {
        custom: false
      }
    }
  }
}
```

The URL and request body to write the correct value with defined trust settings has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<row ID>?
systemName=<source system providing the correct value>{
  "<field name>": "<correct value>",
  "$original": {
    "<field name>": "<current value>",
  },
  "TRUST": {
    "<field name>": {
      "trustSetting" : {
        custom: true, // if custom=true, all other trustSetting fields
                    //are mandatory. If they are not set,
                    //the service will return an error.
        minimumTrust: <minimum trust percent>,
        maximumTrust: <maximum trust percent>,
        timeUnit: "<units for measuring trust decay>",
        maximumTimeUnits: <number of units>,
        graphType: "<name of graph type>"
      }
    }
  }
}
```

## Trust Parameters

You can define the following trust parameters:

### minimumTrust

Trust level that a data value has when it is old (after the decay period has elapsed). This value must be less than or equal to the maximum trust.

**Note:** If the maximum and minimum trust are equal, then the decay curve is a flat line, and the decay period and decay type have no effect.

### maximumTrust

Trust level that a data value has if it has just been changed. For example, if source system X changes a phone number field from 555-1234 to 555-4321, the new value gets system X's maximum trust level for the phone number field. By setting the maximum trust level relatively high, you can ensure that changes in the source systems are applied to the base object.

### timeUnit

Specifies the units used in calculating the decay period—day, week, month, quarter, or year.

### maximumTimeUnits

Specifies the number — of days, weeks, months, quarters, or years — used in calculating the decay period.

### graphType

Decay follows a pattern in which the trust level decreases during the decay period. The graph types can be one of the following decay patterns:

Graph Type Parameter	Description
LINEAR	Simplest decay. Decay follows a straight line from the maximum trust to the minimum trust.
RISL	Most of the decrease occurs toward the beginning of the decay period. Decay follows a concave curve. If a source system has this graph type, then a new value from the system will probably be trusted, but this value might be overridden.
SIRL	Most of the decrease occurs toward the end of the decay period. Decay follows a convex curve. If a source system has this graph type, it will be relatively unlikely for any other system to override the value in the master record until the value is near the end of its decay period.

## Write the Correct Value to the Master Record Example

### Example 1

You want to change the name in the master record from Sam Brown to John Smith. The change is attributed to the Sales source system. The trust settings are set to the administrator trust settings.

The following code shows the URL and command for Example 1.

```
POST http://localhost:8080/cmxcsllocalhost-orcl-ORS/Person/123?systemName=Sales
{
  "firstName": "John",
  "lastName": "Smith"
  "$original": {
    "firstName": "Sam",
    "lastName": "Brown"
  },
}
```

```

    "TRUST": {
      "firstName": {
        "trustSetting" : {
          custom: false
        }
      }
      "lastName": {
        "trustSetting" : {
          custom: false
        }
      }
    }
  }
}

```

### Example 2

You want to change the name in the master record from Sam Brown to John Smith. The change is attributed to the SFA source system. The trust settings are set to a minimum trust of 60 and a maximum trust of 90, and the trust decays linearly over a decay period of three months.

The following code shows the URL and command for Example 2.

```

POST http://localhost:8080/cmx/cs/localhost-orcl-ORS/Person/123?systemName=SFA
{
  "firstName": "John",
  "lastName": "Smith"
  "$original": {
    "firstName": "Sam",
    "lastName": "Brown"
  },
  "TRUST": {
    "firstName": {
      "trustSetting" : {
        custom: true,
        minimumTrust: 60,
        maximumTrust: 90,
        timeUnit: "Month",
        maximumTimeUnits: 3,
        graphType: "LINEAR"
      }
    }
    "lastName": {
      "trustSetting" : {
        custom: true,
        minimumTrust: 60,
        maximumTrust: 90,
        timeUnit: "Month",
        maximumTimeUnits: 3,
        graphType: "LINEAR"
      }
    }
  }
}

```

## Remove Mismatched Source Data

If a cross-reference record is incorrectly associated with a particular master record, a data steward can unmerge the cross-reference record. A new master record is created from the unmerged cross-reference record.

Only one cross-reference record can be unmerged in an unmerge call. If several cross-reference records need to be unmerged, make an unmerge call for each cross-reference record.

If a trigger is configured for an unmerge event, then an unmerge task is created. Otherwise, the cross-reference record is unmerged.

The URL and command to unmerge a record based on the system name and source key has the following format:

```
POST http://<host>:<port>/<context>/<database ID>/<business entity>/<row ID>?
action=unmerge&systemName=<source system name>
{
  name: "<object name>",
  key: {rowid: "<rowid value>", sourcekey: "<source key>", systemName: "<source system
name>" }
}
```

The URL and command to unmerge a record based on the cross-reference record ID has the following format:

```
POST http://<host>:<port>/<context>/<database ID>/<business entity>/<row ID>?
action=unmerge&systemName=<source system name>
{
  name: "<object name>",
  key: {rowid: "<rowid value>", rowidXref: "<row ID of xref>"}
}
```

## Remove Mismatched Source Data Example

### REST API Example

The following code shows the URL and command to unmerge the cross-reference record at the child level from an Address record:

```
POST http://localhost:8080/cmxc/cs/localhost-orcl-MDM_SAMPLE/Person/181921?
action=unmerge&systemName=Admin
{
  "name": "Person.Address",
  "key": {
    "rowid": "41721 ",
    "rowidXref": "41722"
  }
}
```

Where:

- the cross-reference record to unmerge has a row ID of 41722
- the row ID of the master record to unmerge the cross-reference record from is 41721
- the row ID of the root record is 181921

### SOAP/EJB Example

The following code shows the URL and command to unmerge the cross-reference record at the child level from an Address record:

```
<ns9:UnMerge xmlns:ns2="urn:co-base.informatica.mdm" xmlns:ns7="urn:co-
meta.informatica.mdm" xmlns:ns3="http://services.dnb.com/LinkageServiceV2.0"
xmlns:ns8="urn:task-base.informatica.mdm" xmlns:ns6="urn:co-ors.informatica.mdm"
xmlns:ns1="urn:cs-base.informatica.mdm" xmlns:ns9="urn:cs-ors.informatica.mdm"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns9:UnMerge">
  <ns9:parameters>
    <ns9:businessEntityKey name="Person">
      <ns1:key>
        <ns1:rowid>181921</ns1:rowid>
      </ns1:key>
    </ns9:businessEntityKey>
    <ns9:unmergeKey name="Person.TelephoneNumbers">
      <ns1:key>
        <ns1:rowid>41721 </ns1:rowid>
        <ns1:rowidXref>41722</ns1:rowidXref>
      </ns1:key>
    </ns9:unmergeKey>
    <ns9:treeUnmerge>true</ns9:treeUnmerge>
  </ns9:parameters>
</ns9:UnMerge>
```

Where:

- the cross-reference record to unmerge has a row ID of 41722
- the row ID of the master record to unmerge the cross-reference record from is 41721
- the row ID of the root record is 181921

## Unmerge Response

The unmerge response contains the row ID of the base object that is created from the unmerged cross-reference record.

### Response example 1

The following example shows the response when you a cross-reference record from a Person root node.

```
{
  Person: {
    rowidObject: "7777"
  }
}
```

### Response example 2

The following example shows the response when you a cross-reference record from an Address child node.

```
{
  Person: {
    Address: {
      item: [
        rowidObject: "55555"
      ]
    }
  }
}
```



## CHAPTER 6

# Supporting Corporate Linkage Service

This chapter includes the following topics:

- [Overview, 265](#)
- [Business Entity Services for DaaS Import and Update, 265](#)
- [Configuring Linkage Support, 266](#)
- [Custom Application for Linkage Data Splitting, 266](#)

## Overview

The corporate linkage service from Duns & Bradstreet (D&B) returns the parent of a requested organization and all its related entities. You can use the linkage service from D&B through which you can get information of all branches and divisions of an organization. You can create and update records with the data from the linkage service.

You can import the corporate linkage data into the MDM Hub. You must develop a custom application that can use the linkage service from the DaaS provider custom component in an Entity View.

You require a business entity service to import the data from the D&B service and create a record with the data. When there is a change in the data in the external storage, you must be able to make the corresponding changes in your record. D&B provides a monitoring service that notifies you of changes in data. You require a service that can accept data before and after a change, and apply the changes to the corresponding record.

## Business Entity Services for DaaS Import and Update

The DaaS Import business entity service accepts data from the linkage service in XML format and converts it into a record. The DaaS Update business entity service accepts data from the external service in the form of

two XML files. The two XML files correspond to data before and after a change. The Update service applies the changes to the corresponding record.

#### RELATED TOPICS:

- [“DaaS Import” on page 240](#)
- [“DaaS Update” on page 243](#)

## Configuring Linkage Support

To use the linkage service from D&B to create and update records, you must add configuration in the Provisioning tool and create a custom application to split the response from the linkage service.

Perform the following tasks to configure support for the linkage service of D&B:

1. Use the Provisioning tool to upload the WSDL for the linkage service.
2. Use the Provisioning tool to configure an XML document to business entity transformation and expose it as a service. When you expose the transformation as a service, the process creates the DaaS Import and Update business entity services.
3. Create a custom application that can request data from the linkage service and split the response into record details and linkage details.
4. Develop a user interface that sends the request to the custom application.

**Note:** For more information about how to upload the WSDL and configure an XML to business entity transformation, see the Integrating Data as a Service chapter in the *Multidomain MDM Provisioning Tool Guide*.

## Custom Application for Linkage Data Splitting

To use the linkage services from D&B, you must design a custom application that can split the linkage information into record details and linkage details.

The custom application must perform the following functions:

1. Accept request for a linkage service from the Entity View.
2. Send the request to D&B and receive the response.
3. Convert the response to XML.
4. Split the response into record details and linkage details.
5. Send the XML information to business entity services to save as a record in the database.
6. Monitor changes to the data and call the List Change Notice function of the external service.

## CHAPTER 7

# External Calls to Cleanse, Analyze, and Transform Data

This chapter includes the following topics:

- [Overview, 267](#)
- [Supported Events, 268](#)
- [How to Configure External Calls, 268](#)
- [Example: Custom Validation and Logic for Business Entity Services, 269](#)

## Overview

External providers provide web services to cleanse, analyze, and transform record data. Use the external web services for custom validation, such as checking if the address field is empty when you add a record. Use the external web services for custom logic to transform record data. For example, when you merge two records, you can merge addresses, but not telephone numbers.

An external web service exposes one or more operations that the business entity services can call. Each operation has a request and response type. Business entity services send the record data with the required service parameters to external services. You can configure calls to the external web services for certain steps in the execution logic. Based on the logic that you implement, requests go from Data Director to update the record data. The external services might modify the data, if required.

In the Provisioning tool, configure the business entity and the events for which you want to call the external service. In the Provisioning tool, upload the WSDL file for the external service and register the SOAP service and operation. Bind the service to specific business entities and events.

Use the WSDL file in the Resource Kit to understand the service, operations, methods, and the data types that the service methods exchange. The `custom-logic-service.wsdl` file for the external web services is in the following Resource Kit location: `C:\<infadm installation directory>\hub\resourcekit\samples\BESEExternalCall\source\resources\webapp\WEB-INF\wsdl\`

The Resource Kit includes sample code that implements custom logic and validation. When you install the Resource Kit, the `bes-external-call.ear` file for the sample custom logic and validation is deployed on the application server.

# Supported Events

A business entity service consists of service steps. You can apply custom logic and validation to any of the steps.

You can make external calls for the following events:

- WriteCO.BeforeEverything
- WriteCO.BeforeValidate
- WriteCO.AfterValidate
- WriteCO.AfterEverything
- WriteView.BeforeEverything
- WriteView.BeforeValidate
- WriteView.AfterValidate
- WriteView.AfterEverything
- MergeCO.BeforeEverything
- MergeCO.AfterEverything
- PreviewMergeCO.BeforeEverything
- PreviewMergeCO.AfterEverything
- ReadCO.BeforeEverything
- ReadCO.AfterEverything
- ReadView.BeforeEverything
- ReadView.AfterEverythingEvents

# How to Configure External Calls

A business entity service has service steps. An incoming request passes through each service step. You can configure calls to external services for certain steps in the business entity service execution logic.

Perform the following steps to configure the external calls:

1. Build and deploy the `bes-external-call.ear` file.
2. In the Provisioning tool, perform the following tasks:
  - a. Upload the WSDL file for the external service.
  - b. Register the web service as a SOAP service.
  - c. Configure an external call.

For more information about uploading the WSDL file, registering the SOAP service, and configuring external calls, see the *Multidomain MDM Provisioning Tool Guide*.

For more information about building and deploying the EAR file, see the *Multidomain MDM Resource Kit Guide*.

# Example: Custom Validation and Logic for Business Entity Services

You can test the custom validation and logic when you add and merge the Person records. The custom validation checks if the Person record has an address. The custom logic does not allow you to merge two telephone numbers. Use REST APIs to create and merge the Person records.

1. To check the validation when you create a Person record, perform the following steps:
  - a. Use the Create API to create a Person record without an address. You get a validation error.
  - b. Use the Create API to create a Person record with an address. The operation is successful.
2. To check the custom logic when you merge records, perform the following steps:
  - a. Use the Create API to create two Person records with addresses and telephone numbers.
  - b. Use the Preview Merge API to merge the two Person records. Add `overrides` to the preview merge request to merge the addresses and the telephones. The response shows a single address, but two telephone numbers. The custom logic prevents the merging of telephone numbers.

## Prerequisites

To check the custom logic and validation, you must upload the WSDL file in the Provisioning tool. You must register the SOAP service and operation. Bind the service to the business entities and events for which you want to use custom logic and validation. You can test the logic and validation for the specified business entities and events.

## Step 1. Test Custom Validation

Use the Create API to create the following Person record without an address:

```
POST http://localhost:8080/cmxc/cs/localhost-orcl-mdm_Sample/Person?systemName=Admin
{
    firstName: "John"
}
```

You get a validation error.

Use the Create API to create the following Person record with an address:

```
POST http://localhost:8080/cmxc/cs/localhost-orcl-mdm_Sample/Person?systemName=Admin
{
    firstName: "John",
    Addresses: {
        item: [
            {
                cityName: "Toronto"
            }
        ]
    }
}
```

The request creates a Person record.

## Step 2. Test Custom Logic

Perform the following steps to test the custom logic:

1. Use the Create API to create two Person records with addresses and telephones:

```
POST http://localhost:8080/cmx/cs/localhost-orcl-mdm_sample/Person?systemName=Admin
{
  firstName: "John",
  Addresses: {
    item: [
      {
        cityName: "Toronto"
      }
    ]
  },
  TelephoneNumbers: {
    item:[
      {
        phoneNum: "111-11-11"
      }
    ]
  }
}
```

```
POST http://localhost:8080/cmx/cs/localhost-orcl-mdm_sample/Person?systemName=Admin
{
  firstName: "John",
  Addresses: {
    item: [
      {
        cityName: "Ottawa"
      }
    ]
  },
  TelephoneNumbers: {
    item:[
      {
        phoneNum: "222-22-22"
      }
    ]
  }
}
```

The response contains the following rowIds:

- Person: 161923, 161924
- Addresses: 2123, 2124
- TelephoneNumbers: 101723, 101724

2. Run the PreviewMerge API to merge both the Person records:

```
POST http://localhost:8080/cmx/cs/localhost-orcl-mdm_sample/Person/161923?
action=previewMerge&depth=2
{
  keys: [
    {
      rowid: "161924"
    }
  ]
}
```

The response is a Person record with two Addresses and two Telephone numbers.

```
{
  "Person": {
    "rowidObject": "161923",
    "creator": "admin",
    "createDate": "2016-10-20T09:50:35.878-04:00",
    "updatedBy": "admin",
    "lastUpdateDate": "2016-10-20T09:50:35.879-04:00",
```

```

"consolidationInd": 4,
"lastRowidSystem": "SYS0      ",
"hubStateInd": 1,
"label": "Person: , Bill",
"partyType": "Person",
"displayName": "Bill",
"firstName": "Bill",
"TelephoneNumbers": {
  "link": [],
  "firstRecord": 1,
  "recordCount": 2,
  "pageSize": 2,
  "item": [
    {
      "rowidObject": "101723      ",
      "creator": "admin",
      "createDate": "2016-10-20T09:50:35.904-04:00",
      "updatedBy": "admin",
      "lastUpdateDate": "2016-10-20T09:50:35.905-04:00",
      "consolidationInd": 4,
      "lastRowidSystem": "SYS0      ",
      "hubStateInd": 1,
      "label": "PhoneNumbers",
      "phoneNum": "111-1111      ",
      "phoneCountryCd": "1"
    },
    {
      "rowidObject": "101724      ",
      "creator": "admin",
      "createDate": "2016-10-20T09:50:54.768-04:00",
      "updatedBy": "admin",
      "lastUpdateDate": "2016-10-20T09:50:54.769-04:00",
      "consolidationInd": 4,
      "lastRowidSystem": "SYS0      ",
      "hubStateInd": 1,
      "label": "PhoneNumbers",
      "phoneNum": "222-2222      ",
      "phoneCountryCd": "1"
    }
  ]
},
"Addresses": {
  "link": [],
  "firstRecord": 1,
  "recordCount": 2,
  "pageSize": 2,
  "item": [
    {
      "rowidObject": "2123      ",
      "creator": "admin",
      "createDate": "2016-10-20T09:50:37.956-04:00",
      "updatedBy": "admin",
      "lastUpdateDate": "2016-10-20T09:50:37.956-04:00",
      "consolidationInd": 4,
      "lastRowidSystem": "SYS0      ",
      "hubStateInd": 1,
      "label": "Addresses",
      "Address": {
        "rowidObject": "2121      ",
        "creator": "admin",
        "createDate": "2016-10-20T09:50:36.922-04:00",
        "updatedBy": "admin",
        "lastUpdateDate": "2016-10-20T09:50:37.923-04:00",
        "consolidationInd": 4,
        "lastRowidSystem": "SYS0      ",
        "hubStateInd": 1,
        "label": "Address",
        "cityName": "Toronto"
      }
    }
  ]
},

```

```

    {
      "rowidObject": "2124",
      "creator": "admin",
      "createDate": "2016-10-20T09:50:54.790-04:00",
      "updatedBy": "admin",
      "lastUpdateDate": "2016-10-20T09:50:54.790-04:00",
      "consolidationInd": 4,
      "lastRowidSystem": "SYS0",
      "hubStateInd": 1,
      "label": "Addresses",
      "Address": {
        "rowidObject": "2122",
        "creator": "admin",
        "createDate": "2016-10-20T09:50:54.777-04:00",
        "updatedBy": "admin",
        "lastUpdateDate": "2016-10-20T09:50:54.777-04:00",
        "consolidationInd": 4,
        "lastRowidSystem": "SYS0",
        "hubStateInd": 1,
        "label": "Address",
        "cityName": "Ottawa"
      }
    }
  ]
}

```

3. Run the PreviewMerge API to merge both the Person records, with overrides to merge the addresses and telephone numbers:

```

POST http://localhost:8080/cmx/cs/localhost-orcl-MDM_SAMPLE/Person/161923?
action=previewMerge&depth=3
{
  keys: [
    { rowid: "161923" }
  ],
  overrides: {
    Person: {
      Addresses: {
        item:[
          {
            rowidObject: "2123",
            MERGE: {
              item:[{key:{rowid: "2124"}}],
              $original: {
                item:[null]
              }
            }
          }
        ]
      },
      TelephoneNumbers: {
        item:[
          {
            rowidObject: "101723",
            MERGE: {
              item:[{key:{rowid: "101724"}}],
              $original: {
                item:[null]
              }
            }
          }
        ]
      }
    }
  }
}

```



The response shows a single address, but two telephone numbers:

```
{
  "Person": {
    "rowidObject": "161923",
    "creator": "admin",
    "createDate": "2016-10-20T09:50:35.878-04:00",
    "updatedBy": "admin",
    "lastUpdateDate": "2016-10-20T09:50:35.879-04:00",
    "consolidationInd": 4,
    "lastRowidSystem": "SYS0",
    "hubStateInd": 1,
    "label": "Person: , Bill",
    "partyType": "Person",
    "displayName": "Bill",
    "firstName": "Bill",
    "TelephoneNumbers": {
      "link": [],
      "firstRecord": 1,
      "recordCount": 2,
      "pageSize": 2,
      "item": [
        {
          "rowidObject": "101723",
          "creator": "admin",
          "createDate": "2016-10-20T09:50:35.904-04:00",
          "updatedBy": "admin",
          "lastUpdateDate": "2016-10-20T09:50:35.905-04:00",
          "consolidationInd": 4,
          "lastRowidSystem": "SYS0",
          "hubStateInd": 1,
          "label": "PhoneNumbers",
          "phoneNum": "111-1111",
          "phoneCountryCd": "1"
        },
        {
          "rowidObject": "101724",
          "creator": "admin",
          "createDate": "2016-10-20T09:50:54.768-04:00",
          "updatedBy": "admin",
          "lastUpdateDate": "2016-10-20T09:50:54.769-04:00",
          "consolidationInd": 4,
          "lastRowidSystem": "SYS0",
          "hubStateInd": 1,
          "label": "PhoneNumbers",
          "phoneNum": "222-2222",
          "phoneCountryCd": "1"
        }
      ]
    }
  },
  "Addresses": {
    "link": [],
    "firstRecord": 1,
    "recordCount": 1,
    "pageSize": 1,
    "item": [
      {
        "rowidObject": "2123",
        "creator": "admin",
        "createDate": "2016-10-20T09:50:37.956-04:00",
        "updatedBy": "admin",
        "lastUpdateDate": "2016-10-20T09:50:37.956-04:00",
        "consolidationInd": 4,
        "lastRowidSystem": "SYS0",
        "hubStateInd": 1,
        "label": "Addresses"
      }
    ]
  },
  "PersonDetails": {
```

```
    "link": [],  
    "recordCount": 0,  
    "pageSize": 0,  
    "item": []  
  }  
}
```

# APPENDIX A

## Using REST APIs to Add Records

This appendix includes the following topics:

- [Using REST APIs to Add Records Overview, 275](#)
- [Person Business Entity Structure, 276](#)
- [Step 1. Get Information about the Schema, 276](#)
- [Step 2. Create a Record, 282](#)
- [Step 3. Read the Record, 284](#)

### Using REST APIs to Add Records Overview

After you create a business entity model and configure the business entity structure, you can use the REST APIs to add the records.

The following sections use the example of the Person business entity to illustrate how you can add records by using REST APIs. The Person business entity contains data for the employees in your company.


Use the following APIs to add the details of your employees:

1. Get information about the schema. Use the Get Metadata REST API to get information about the data structure of a business entity, including the structure, the list of fields, the field types, and the details of the lookup fields. Or, you can access the XML Schema Definition (XSD) files which describe what elements and attributes you can use. The XSD files are in the `http://<host>:<port>/cmx/csfiles` location.
2. Create a record. Use the Create Record REST API to create the record.
3. Read the data from the record that you have added. Use the Read Record REST API to retrieve the data from the record.

# Person Business Entity Structure

We will add a Person record by using REST APIs. The Person root node is the uppermost node in the Person business entity structure. Under the Person root node, there are nodes for the employee details such as gender, address, and phone.

The following image shows the structure of the Person business entity:

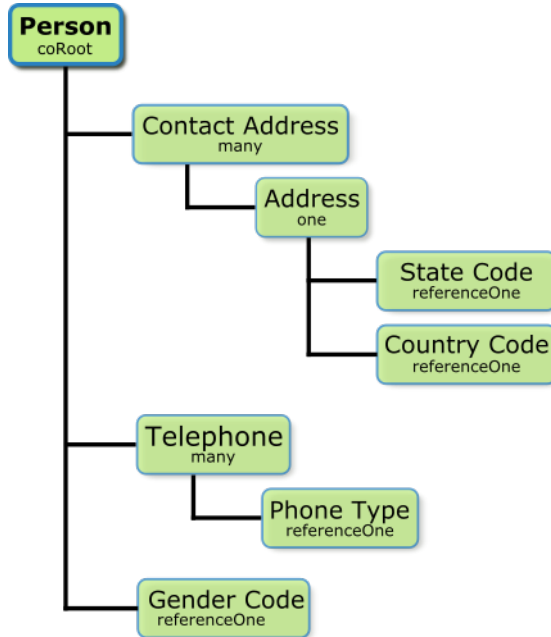

Person is the root node of the Person business entity. The node type, listed below the node name, indicates the relationship between the parent node and the child node. There is a one-to-one relationship between the Contact Address and the Address, which indicates that each contact address can only have one address associated with it. There is a one-to-many relationship between the Person and the Telephone, which indicates that a Person record can have many telephone number records associated with it. There is a one-to-one relationship between the Person and the Gender, which indicates that a person record can have only one gender value. The gender values reside in a lookup table. Similarly, the state code and country code values reside in lookup tables.

## Step 1. Get Information about the Schema

Use the Get Metadata REST API to get information about a schema. The Get Metadata API returns the data structure of a business entity. The metadata lists the business entity fields, field types, and details of the lookup fields.

The Get Metadata URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>?action=meta
```

The following sample request retrieves metadata information for the Person business entity:

```
GET http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person?action=meta
```

## Get Metadata Response

The following example shows some excerpts of the data structure of the Person business entity:

```
{
  "object": {
    "field": [
      {
        "allowedValues": [
          "Person"
        ],
        "name": "partyType",
        "label": "Party Type",
        "dataType": "String",
        "length": 255,
        "totalDigits": 0,
        "fractionDigits": 0,
        "readOnly": false,
        "required": false,
        "system": false
      },
      {
        "name": "imageUrl",
        "label": "Image URL",
        "dataType": "ImageURL",
        "length": 255,
        "totalDigits": 0,
        "fractionDigits": 0,
        "readOnly": false,
        "required": false,
        "system": false
      },
      {
        "name": "statusCd",
        "label": "Status Cd",
        "dataType": "String",
        "length": 2,
        "totalDigits": 0,
        "fractionDigits": 0,
        "readOnly": false,
        "required": false,
        "system": false
      },
      {
        "name": "displayName",
        "label": "Display Name",
        "dataType": "String",
        "length": 200,
        "totalDigits": 0,
        "fractionDigits": 0,
        "readOnly": false,
        "required": false,
        "system": false
      },
      {
        "name": "birthdate",
        "label": "Birthdate",
        "dataType": "Date",
        "length": 0,
        "totalDigits": 0,
        "fractionDigits": 0,
        "readOnly": false,
        "required": false,
        "system": false
      },
      {
        "name": "firstName",
        "label": "First Name",
        "dataType": "String",
        "length": 50,
        "totalDigits": 0,

```

```

        "fractionDigits": 0,
        "readOnly": false,
        "required": false,
        "system": false
    },
    {
        "name": "lastName",
        "label": "Last Name",
        "dataType": "String",
        "length": 50,
        "totalDigits": 0,
        "fractionDigits": 0,
        "readOnly": false,
        "required": false,
        "system": false
    },
    {
        "name": "middleName",
        "label": "Middle Name",
        "dataType": "String",
        "length": 50,
        "totalDigits": 0,
        "fractionDigits": 0,
        "readOnly": false,
        "required": false,
        "system": false
    },
    {
        "name": "dirtyIndicator",
        "label": "Dirty Indicator",
        "dataType": "Integer",
        "length": 38,
        "totalDigits": 0,
        "fractionDigits": 0,
        "readOnly": true,
        "required": false,
        "system": true
    },
    {
        "name": "hubStateInd",
        "label": "Hub State Ind",
        "dataType": "Integer",
        "length": 38,
        "totalDigits": 0,
        "fractionDigits": 0,
        "readOnly": true,
        "required": false,
        "system": true
    },
    {
        "name": "cmDirtyInd",
        "label": "Content metadata dirty Ind",
        "dataType": "Integer",
        "length": 38,
        "totalDigits": 0,
        "fractionDigits": 0,
        "readOnly": true,
        "required": false,
        "system": true
    },
    {
        "name": "lastRowidSystem",
        "label": "Last Rowid System",
        "dataType": "String",
        "length": 14,
        "totalDigits": 0,
        "fractionDigits": 0,
        "readOnly": true,
        "required": false,
        "system": true
    },

```

```

-----
    {
      "name": "genderCd",
      "label": "Gender Cd",
      "dataType": "lookup",
      "readOnly": false,
      "required": false,
      "system": false,
      "lookup": {
        "link": [
          {
            "href": "http://localhost:8080/cmx/cs/localhost-hub101-
ds_ui1/LUGender?action=list&idlabel=genderCode%3AgenderDisp",
            "rel": "lookup"
          },
          {
            "href": "http://localhost:8080/cmx/cs/localhost-hub101-
ds_ui1/LUGender?action=list",
            "rel": "list"
          }
        ],
        "object": "LUGender",
        "key": "genderCode",
        "value": "genderDisp"
      }
    }
  ],
}
-----

```

```

"child": [
  {
    "field": [
      {
        "name": "cityName",
        "label": "City Name",
        "dataType": "String",
        "length": 100,
        "totalDigits": 0,
        "fractionDigits": 0,
        "readOnly": false,
        "required": false,
        "system": false
      },
      {
        "name": "addressLine2",
        "label": "Address Line2",
        "dataType": "String",
        "length": 100,
        "totalDigits": 0,
        "fractionDigits": 0,
        "readOnly": false,
        "required": false,
        "system": false
      },
      {
        "name": "addressLine1",
        "label": "Address Line1",
        "dataType": "String",
        "length": 100,
        "totalDigits": 0,
        "fractionDigits": 0,
        "readOnly": false,
        "required": false,
        "system": false
      },
      {
        "name": "isValidInd",
        "label": "Is Valid Ind",

```

```

        "dataType": "String",
        "length": 1,
        "totalDigits": 0,
        "fractionDigits": 0,
        "readOnly": false,
        "required": false,
        "system": false
    },
    {
        "name": "postalCd",
        "label": "Postal Cd",
        "dataType": "String",
        "length": 10,
        "totalDigits": 0,
        "fractionDigits": 0,
        "readOnly": false,
        "required": false,
        "system": false
    },

```

-----

```

    {
        "name": "countryCode",
        "label": "Country Code",
        "dataType": "lookup",
        "readOnly": false,
        "required": false,
        "system": false,
        "dependents": [
            "Person.Address.Address.stateCd"
        ],
        "lookup": {
            "link": [
                {
                    "href": "http://localhost:8080/cmxc/cs/localhost-hub101-ds_uil/LUCountry?action=list",
                    "rel": "list"
                },
                {
                    "href": "http://localhost:8080/cmxc/cs/localhost-hub101-ds_uil/LUCountry?action=list&idlabel=countryCode%3AcountryNameDisp",
                    "rel": "lookup"
                }
            ],
            "object": "LUCountry",
            "key": "countryCode",
            "value": "countryNameDisp"
        }
    },
    {
        "name": "stateCd",
        "label": "State Cd",
        "dataType": "lookup",
        "readOnly": false,
        "required": false,
        "system": false,
        "parents": [
            "Person.Address.Address.countryCode"
        ],
        "lookup": {
            "link": [
                {
                    "href": "http://localhost:8080/cmxc/cs/localhost-hub101-ds_uil/LUCountry/{Person.Address.Address.countryCode}/LUState?action=list",
                    "rel": "list"
                },
                {
                    "href": "http://localhost:8080/cmxc/cs/

```





```
}  
}
```

## Step 2. Create a Record

Use the Create Record REST API to create a record. The name of the business entity and the name of the source system are required parameters. Send data for the record in the request body.

The Create Record URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>?systemName=<name of the  
source system>
```

The `systemName` parameter is a required parameter and specifies the name of the source system.

The Person business entity has the Person root node, and the second level address, gender, and phone nodes.

The following sample request creates a Person record:

```
POST http://localhost:8080/cmx/cs/localhost-hub101-ds_uil/Person?systemName=Admin  
{  
  "firstName": "Boris",  
  "lastName": "Isaac",  
  "genderCd": {  
    "genderCode": "M"  
  },  
  "Address": {  
    "item": [  
      {  
        "Address": {  
          "addressLine1": "B-203, 101 Avenue, New York",  
          "stateCd": {  
            "stateAbbreviation": "NY"  
          },  
          "countryCode": {  
            "countryCode": "US"  
          }  
        }  
      }  
    ]  
  },  
  "Telephone": {  
    "item": [  
      {  
        "phoneNum": "1234567",  
        "phoneTypeCd": {  
          "phoneType": "HOM"  
        }  
      },  
      {  
        "phoneNum": "7654321",  
        "phoneTypeCd": {  
          "phoneType": "MOB"  
        }  
      }  
    ]  
  }  
}
```

The request body specifies the following details of the Person record:

- First name.
- Last name.

- Gender.
- Address with the state code and the country code.
- Phone numbers along with the phone type, such as home phone and mobile phone.

## Create Record Response

The following sample response shows the response after successfully creating a Person record:

```
{
  "Person": {
    "key": {
      "rowid": "658248",
      "sourceKey": "66240000025000"
    },
    "rowidObject": "658248",
    "genderCd": {
      "key": {
        "rowid": "2"
      },
      "rowidObject": "2"
    },
    "Address": {
      "link": [],
      "item": [
        {
          "key": {
            "rowid": "101526",
            "sourceKey": "66240000028000"
          },
          "rowidObject": "101526",
          "Address": {
            "key": {
              "rowid": "121506",
              "sourceKey": "66240000027000"
            },
            "rowidObject": "121506",
            "countryCode": {
              "key": {
                "rowid": "233"
              },
              "rowidObject": "233"
            },
            "stateCd": {
              "key": {
                "rowid": "52"
              },
              "rowidObject": "52"
            }
          }
        }
      ]
    },
    "Telephone": {
      "link": [],
      "item": [
        {
          "key": {
            "rowid": "20967",
            "sourceKey": "66240000029000"
          },
          "rowidObject": "20967",
          "phoneTypeCd": {
            "key": {
              "rowid": "8"
            },
            "rowidObject": "8"
          }
        }
      ]
    }
  }
}
```

```

    },
    {
      "key": {
        "rowid": "20968",
        "sourceKey": "66240000030000"
      },
      "rowidObject": "20968",
      "phoneTypeCd": {
        "key": {
          "rowid": "6"
        },
        "rowidObject": "6"
      }
    }
  ]
}

```

**Note:** The response body contains the record with the generated rowIds.

If you configure a workflow process to start when you create a record, the following things happen:

- Record is created in a pending state.
- Workflow process is started.
- Workflow process ID is returned in the response header.

If you do not configure a workflow process, then by default, the record is created as Active.

The API returns an interaction ID in the response header if you process the request using an interaction ID.

## Step 3. Read the Record

Use the Read Record REST API to retrieve the details of a root record that you added. You can use the API to retrieve the details of the child records of a root record.

The Read Record URL has the following format:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId of the root record>
```

Use the `depth` parameter to specify the number of child levels to return. Specify 2 to return the root node and its direct children, and 3 to return the root node, direct children, and grandchildren. Use the following URL to return the details of the child records:

```
http://<host>:<port>/<context>/<database ID>/<business entity>/<rowId of the record>?
depth=n
```

The following sample request returns the details of the root node, the direct children, and the grandchildren:

```
GET http://localhost:8080/cmx/cs/localhost-hub101-ds_ui1/Person/658248?depth=3
```

The request returns the details of an active record.

**Note:** If a workflow is started when you create a record, the record created is in pending state. By default, the Read Record request reads active records. Use the `recordStates` parameter to specify the pending state of the record.

The following sample request reads the details of a pending record:

```
GET http://localhost:8080/cmx/cs/localhost-hub101-ds_ui1/Person/658248?
depth=3&recordStates=PENDING
```

## Read the Record Response

The following sample response shows the details of the record that you added:

```
{
  "link": [
    {
      "href": "http://localhost:8080/cmx/cs/localhost-hub101-ds_ui1/Person/658248",
      "rel": "self"
    },
    {
      "href": "http://localhost:8080/cmx/cs/localhost-hub101-ds_ui1/Person/658248?
depth=2",
      "rel": "children"
    }
  ],
  "rowidObject": "658248",
  "label": "Person",
  "partyType": "Person",
  "displayName": "BORIS ISAAC",
  "firstName": "BORIS",
  "lastName": "ISAAC",
  "genderCd": {
    "link": [
      {
        "href": "http://localhost:8080/cmx/cs/localhost-hub101-ds_ui1/Person/
658248/genderCd/2",
        "rel": "self"
      },
      {
        "href": "http://localhost:8080/cmx/cs/localhost-hub101-ds_ui1/Person/
658248",
        "rel": "parent"
      },
      {
        "href": "http://localhost:8080/cmx/cs/localhost-hub101-ds_ui1/Person/
658248/genderCd/2?depth=2",
        "rel": "children"
      }
    ],
    "rowidObject": "2",
    "label": "LU Gender",
    "genderCode": "M",
    "genderDisp": "MALE"
  },
  "Address": {
    "link": [
      {
        "href": "http://localhost:8080/cmx/cs/localhost-hub101-ds_ui1/Person/
658248/Address",
        "rel": "self"
      },
      {
        "href": "http://localhost:8080/cmx/cs/localhost-hub101-ds_ui1/Person/
658248",
        "rel": "parent"
      }
    ],
    "firstRecord": 1,
    "pageSize": 10,
    "searchToken": "SVR1.PCWJ",
    "item": [
      {
        "link": [
          {
            "href": "http://localhost:8080/cmx/cs/localhost-hub101-ds_ui1/
Person/658248/Address",
            "rel": "parent"
          },
          {
            "href": "http://localhost:8080/cmx/cs/localhost-hub101-ds_ui1/
```

```

Person/658248/Address/101526?depth=2",
    "rel": "children"
  },
  {
    "href": "http://localhost:8080/cmxc/cs/localhost-hub101-ds_ui1/
Person/658248/Address/101526",
    "rel": "self"
  }
],
"rowidObject": "101526",
"label": "Contact Address",
"Address": {
  "link": [
    {
      "href": "http://localhost:8080/cmxc/cs/localhost-hub101-
ds_ui1/Person/658248/Address/101526/Address/121506?depth=2",
      "rel": "children"
    },
    {
      "href": "http://localhost:8080/cmxc/cs/localhost-hub101-
ds_ui1/Person/658248/Address/101526",
      "rel": "parent"
    },
    {
      "href": "http://localhost:8080/cmxc/cs/localhost-hub101-
ds_ui1/Person/658248/Address/101526/Address/121506",
      "rel": "self"
    }
  ],
  "rowidObject": "121506",
  "label": "Address",
  "addressLine1": "B-203, 101 Avenue, New York",
  "countryCode": {
    "link": [
      {
        "href": "http://localhost:8080/cmxc/cs/localhost-hub101-
ds_ui1/Person/658248/Address/101526/Address/121506/countryCode",
        "rel": "self"
      },
      {
        "href": "http://localhost:8080/cmxc/cs/localhost-hub101-
ds_ui1/Person/658248/Address/101526/Address/121506",
        "rel": "parent"
      },
      {
        "href": "http://localhost:8080/cmxc/cs/localhost-hub101-
ds_ui1/Person/658248/Address/101526/Address/121506/countryCode?depth=2",
        "rel": "children"
      }
    ]
  },
  "countryCode": "US"
},
"stateCd": {
  "link": [
    {
      "href": "http://localhost:8080/cmxc/cs/localhost-hub101-
ds_ui1/Person/658248/Address/101526/Address/121506",
      "rel": "parent"
    },
    {
      "href": "http://localhost:8080/cmxc/cs/localhost-hub101-
ds_ui1/Person/658248/Address/101526/Address/121506/stateCd?depth=2",
      "rel": "children"
    },
    {
      "href": "http://localhost:8080/cmxc/cs/localhost-hub101-
ds_ui1/Person/658248/Address/101526/Address/121506/stateCd",
      "rel": "self"
    }
  ],
  "stateAbbreviation": "NY"
}

```

```

    }
  }
]
},
"Telephone": {
  "link": [
    {
      "href": "http://localhost:8080/cmx/cs/localhost-hub101-ds_ui1/Person/
658248",
      "rel": "parent"
    },
    {
      "href": "http://localhost:8080/cmx/cs/localhost-hub101-ds_ui1/Person/
658248/Telephone",
      "rel": "self"
    }
  ],
  "firstRecord": 1,
  "pageSize": 10,
  "searchToken": "SVR1.PCWK",
  "item": [
    {
      "link": [
        {
          "href": "http://localhost:8080/cmx/cs/localhost-hub101-ds_ui1/
Person/658248/Telephone",
          "rel": "parent"
        },
        {
          "href": "http://localhost:8080/cmx/cs/localhost-hub101-ds_ui1/
Person/658248/Telephone/20967",
          "rel": "self"
        },
        {
          "href": "http://localhost:8080/cmx/cs/localhost-hub101-ds_ui1/
Person/658248/Telephone/20967?depth=2",
          "rel": "children"
        }
      ],
      "rowidObject": "20967",
      "label": "Telephone",
      "phoneNum": "1234567",
      "phoneTypeCd": {
        "link": [
          {
            "href": "http://localhost:8080/cmx/cs/localhost-hub101-
ds_ui1/Person/658248/Telephone/20967",
            "rel": "parent"
          },
          {
            "href": "http://localhost:8080/cmx/cs/localhost-hub101-
ds_ui1/Person/658248/Telephone/20967/phoneTypeCd/8",
            "rel": "self"
          },
          {
            "href": "http://localhost:8080/cmx/cs/localhost-hub101-
ds_ui1/Person/658248/Telephone/20967/phoneTypeCd/8?depth=2",
            "rel": "children"
          }
        ],
        "rowidObject": "8",
        "label": "LU Phone Type",
        "phoneTypeDisp": "HOME",
        "phoneType": "HOM"
      }
    },
    {
      "link": [
        {
          "href": "http://localhost:8080/cmx/cs/localhost-hub101-ds_ui1/

```

```

Person/658248/Telephone/20968",
    "rel": "self"
  },
  {
    "href": "http://localhost:8080/cmxc/cs/localhost-hub101-ds_ui1/
Person/658248/Telephone/20968?depth=2",
    "rel": "children"
  },
  {
    "href": "http://localhost:8080/cmxc/cs/localhost-hub101-ds_ui1/
Person/658248/Telephone",
    "rel": "parent"
  }
],
"rowidObject": "20968",
"label": "Telephone",
"phoneNum": "7654321",
"phoneTypeCd": {
  "link": [
    {
      "href": "http://localhost:8080/cmxc/cs/localhost-hub101-
ds_ui1/Person/658248/Telephone/20968/phoneTypeCd/6",
      "rel": "self"
    },
    {
      "href": "http://localhost:8080/cmxc/cs/localhost-hub101-
ds_ui1/Person/658248/Telephone/20968",
      "rel": "parent"
    },
    {
      "href": "http://localhost:8080/cmxc/cs/localhost-hub101-
ds_ui1/Person/658248/Telephone/20968/phoneTypeCd/6?depth=2",
      "rel": "children"
    }
  ]
},
"rowidObject": "6",
"label": "LU Phone Type",
"phoneTypeDisp": "MOBILE",
"phoneType": "MOB"
}
]
}
}

```



# APPENDIX B

## Using REST APIs to Upload Files

This appendix includes the following topics:

- [Using REST APIs to Upload Files Overview, 289](#)
- [REST APIs for Files, 289](#)
- [File Components, 290](#)
- [Storage Types, 290](#)
- [Attaching Files to Records, 291](#)
- [Attaching Files to Tasks, 293](#)
- [Uploading Resource Bundle Files, 295](#)

### Using REST APIs to Upload Files Overview

You can use the REST APIs to upload files to a storage type. After you upload a file, you can attach the file to a record or a task, or use the file to localize the Data Director user interface.

Based on how you want to use the files, the combination of REST APIs, the file components, and the storage type you use might differ. For example, to attach files to records or tasks, you create the metadata for the file and upload the file to a temporary storage. After you upload the file, you can attach the file to a record in a database or attach the file to a task in the BPM storage. To localize the Data Director user interface, you download the ZIP file, modify the zipped files, and then upload the modified ZIP bundle to the bundle storage.

### REST APIs for Files

You can use a set of general purpose REST APIs to upload and manage files for attachments or localization.

The following table lists the REST APIs for files:

REST API	Description	Supported Storage Type
List File Metadata	Returns list of file metadata in a storage.	BPM or TEMP
Create File Metadata	Creates metadata for a file in a storage.	DB or TEMP

REST API	Description	Supported Storage Type
Get File Metadata	Returns the metadata for a file.	BPM, BUNDLE, DB, or TEMP
Update File Metadata	Updates the metadata for a file.	DB or TEMP
Upload File Content	Uploads the content for a file to a storage.	BUNDLE, DB, or TEMP
Get File Content	Downloads the content for a file.	BPM, BUNDLE, DB, or TEMP
Delete File	Deletes a file in a storage, including components associated to the file such as the file metadata or content.	BUNDLE, DB, or TEMP

## File Components

To attach files to records or tasks, create metadata for the file and then upload the file content. To localize the Data Director user interface, you download the resource bundle file and then upload the modified resource bundle file.

### File metadata

Information about the file, such as the file name, file type, and content type. Depending on your storage type, you might need to include other parameters, such as creator, create time, and upload date.

### File content

The content for the file. For example, the text, image, document, or resource bundle.

## Storage Types

Upload and store files in a supported storage implementation. The storage type that you use depends on whether you want to localize the Data Director user interface or attach files to records or tasks.

The following list describes the supported storage types:

### BPM

Stores files attached to tasks together with the task data. When you attach a file to a task, the process stores the file to a BPM storage from the TEMP storage.

Files stored in the BPM storage use the following file ID format: `taskId::filename`.

**Note:** To attach a file to triggered tasks or existing tasks, in the Provisioning tool, enable attachments for task triggers, task types, and task actions. For more information, see the *Multidomain MDM Provisioning Tool Guide*.

### BUNDLE

Stores resource bundle files that localize the Data Director user interface.

Files stored in the BUNDLE storage use the following file ID format: `besMetadata`.

## DB

Stores file attachments for records in the C\_REPOS\_ATTACHMENTS table. When you attach a file to a record, the process stores the file to a DB storage from the TEMP storage.

Files stored in the DB storage use the following file ID format: `DB_<RowID>`.

**Note:** To attach a file to a record, in the Provisioning tool, configure a field with `FileAttachment` as the data type. For more information about configuring the data type, see the *Multidomain MDM Provisioning Tool Guide*.

## TEMP

Temporarily stores files in the C\_REPOS\_ATTACHMENTS table and marks the files as TEMP. Files are deleted from the TEMP storage after they are successfully uploaded to the BPM or DB storage or after a preconfigured expiration time.

Files stored in the TEMP storage use the following file ID format: `TEMP_<ROWID_ATTACHMENT>`.

For more information about configuring the expiration time, see the *Multidomain MDM Configuration Guide*.

# Attaching Files to Records

Before you attach a file to a record, create the metadata of the file and then upload the file to the temporary storage.

1. To create the metadata of a file, use the Create File Metadata REST API with TEMP as the storage type. For example, the following request creates the metadata for the `Document_3.pdf` file:

```
POST http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/TEMP
Content-Type: application/json
{
  "fileName": "Document_3.pdf",
  "fileType": "pdf",
  "fileContentType": "application/pdf"
}
```

**Note:** Always create the file metadata in the TEMP storage.

The Create File Metadata REST API returns an ID for the file. The file ID is in the following format: `<Storage Type>_<RowID>`. Where the RowID refers to the row ID of the file that you upload to the storage.

In the example, the API call returns the following ID for the `Document_3.pdf` file: `TEMP_SVR1.OJU3`

You can use the file ID to upload, attach, update, download, and delete the file.

2. To upload the file, use the Upload File Content REST API with TEMP as the storage type. For example, the following request uploads the file to the TEMP storage:

```
PUT http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/TEMP/TEMP_SVR1.OJU3/
content
Content-Type: application/octet-stream
<file object (upload using REST client)>
```

**Note:** After you upload a file, the TEMP storage stores the file for a pre-configured period of 60 minutes. You must attach the file to a record before the pre-configured period expires.

3. To create a record and attach the file to a new record, use the Create Record REST API.

For example, the following request creates a record and attaches the file with the file ID,

TEMP\_SVR1.OJU3:

```
POST http://localhost:8080/cmx/cs/localhost-orcl-MDM_SAMPLE/Person?systemName=Admin
Content-Type: application/json
{
  "frstNm":"John",
  "lstNm":"Smith",
  "addrLn1":"2100 Breverly Road",
  "addrTyp":{
    "addrTyp":"Billing",
    "addrTypDesc":"Billing"
  },
  "cntryCd":{
    "cntryCd":"AX",
    "cntryDesc":"Aland"
  },
  "attachments":{
    "item":[
      {
        "fileId":"TEMP_SVR1.OJU3"
      }
    ]
  }
}
```

**Note:** When you attach a file to a record, the process stores the file to the database. The ID of the file changes to DB\_<RowID>, where DB indicates that the file is stored in the database.

4. To replace a file attached to a record, use the Upload File Content REST API with DB as the storage type. For example, the following request replaces the attached file with the file ID, DB\_SVR1.OJU3, in the database:

```
PUT http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/DB/DB_SVR1.OJU3/content
Content-Type: application/octet-stream
<file object (upload using REST client)>
```

**Note:** The storage type in the request URL is DB.

5. To edit the file metadata after you attach a file to a record, use the Update File Metadata REST API with DB as the storage type.

For example, the following request updates the file metadata of a file associated with the file ID, DB\_SVR1.OJU3, in the DB storage:

```
PUT http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/DB/DB_SVR1.OJU3
Content-Type: application/json
{
  "fileName": "Document_4.pdf",
  "fileType": "pdf",
  "fileContentType": "application/pdf"
}
```

6. To download a file attached to a record, use the GET File Content REST API with DB as the storage type. For example, the following request downloads a file associated with the file ID, DB\_SVR1.OJU3, from the DB storage:

```
GET http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/DB/DB_SVR1.OJU3/content
```

7. To delete a file attached to a record, use the Delete File REST API with DB as the storage type. For example, the following request deletes a file associated with the file ID, DB\_SVR1.OJU3, from the DB storage:

```
DELETE http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/DB/DB_SVR1.OJU3
```

# Attaching Files to Tasks

Create the metadata for a file and then upload the file content to a temporary storage. After you upload the file, attach the file to a triggered task or an existing task.

**Note:** To attach a file to triggered tasks or existing tasks, in the Provisioning tool, enable attachments for task triggers, task types, and task actions. For more information, see the *Multidomain MDM Provisioning Tool Guide*.

1. To create the metadata of a file, use the Create File Metadata REST API with TEMP as the storage type. For example, the following request creates the metadata for the `file1.txt` file:

```
POST http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/TEMP

{
  "fileName": "file1.txt",
  "fileType": "text",
  "fileContentType": "text/plain"
}
```

**Note:** Always create the file metadata in the TEMP storage.

The Create File Metadata REST API returns an ID for the file. The file ID is in the following format: `<Storage Type>_<RowID>`. Where the RowID refers to the row ID of the file that you upload to the storage.

In the example, the API call returns the following ID for `file1.txt`: `TEMP_SVR1.1VDVS`

You can use the file ID to upload, attach, update, and delete the file.

2. To upload the file, use the Upload File Content REST API with TEMP as the storage type. For example, the following request uploads the file to the TEMP storage:

```
PUT http://localhost:8080/cmx/file/localhost-orcl-MDM_SAMPLE/TEMP/TEMP_SVR1.1VDVS/
content

Test attachment content: file 1
```

**Note:** After you upload a file, the TEMP storage stores the file for a pre-configured period of 60 minutes. You must attach the file to a task before the pre-configured period expires.

3. Attach the file to the task that is triggered when you manage records.
  - To attach the file to the task that is triggered when you create a record, use the Create Business Entity REST API with the `taskattachments` parameter.

For example, the following request creates a record and attaches the file with the file ID

```
TEMP_SVR1.1VDVS:

POST http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person?
systemName=Admin&taskAttachments=TEMP_SVR1.1VDVS
Content-Type: application/json

{
  firstName: "John",
  lastName: "Smith",
  Phone: {
    item: [
      {
        phoneNumber: "111-11-11"
      }
    ]
  }
}
```

- To attach the file to the task that is triggered when you update a record, use the Update Business Entity REST API with the `taskattachments` parameter.

For example, the following request updates a record and attaches the file with the file ID

TEMP\_SVR1.1VDVS:

```
PUT http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/233?
systemName=Admin&taskAttachments=TEMP_SVR1.1VDVS
{
  rowidObject: "233",
  firstName: "BOB",
  lastName: "LLOYD",
  Phone: {
    item: [
      {
        rowidObject: "164",
        phoneNumber: "777-77-77",
        $original: {
          phoneNumber: "(336)366-4936"
        }
      }
    ]
  },
  $original: {
    firstName: "DUNN"
  }
}
```

- To attach the file to the task that is triggered when you merge a record, use the Merge Business Entity REST API with the `taskattachments` parameter.

For example, the following request merges a record and attaches the file with the file ID

TEMP\_SVR1.1VDVS:

```
POST http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/2478245?
action=merge&taskAttachments=TEMP_SVR1.1VDVS
Content-Type: application/<json/xml>
{
  keys: [
    {
      rowid: "2478246"
    }
  ],
  overrides: {
    Person: {
      firstName: "Charlie"
    }
  }
}
```

- To attach the file to the task that is triggered when you unmerge a record, use the Unmerge Business Entity REST API with the `taskattachments` parameter.

For example, the following request unmerges a record and attaches the file with the file ID

TEMP\_SVR1.1VDVS:

```
POST http://localhost:8080/cmx/cs/localhost-orcl-DS_UI1/Person/2478248?
action=unmerge&taskAttachments=TEMP_SVR1.1VDVS
{
  rowid: "4880369"
}
```

#### 4. Attach the file to an existing task.

- To attach the file when you update a task, use the Update Task REST API with `attachments` in the request body.

For example, the following request updates a task and attaches the file with the file ID

TEMP\_SVR1.1VDVS:

```
PUT http://localhost:8080/cmx/cs/localhost-orcl-MDM_SAMPLE/task/urn:b4p2:15934
{
  taskType: {
```

```

        name: "UpdateWithApprovalWorkflow"
    },
    taskId: "urn:b4p2:15934",
    owner: "John",
    title: "Smoke test task - updated",
    comments: "Smoke testing - updated",
    "attachments": [
        {
            "id": "TEMP_SVR1.1VDVS"
        }
    ],
    ...
}

```

- To attach the file when you execute a task action, use the Execute Task Action REST API with attachments in the request body.

For example, the following request executes a task action and attaches the file with the file ID

TEMP\_SVR1.1VDVS:

```

POST http://localhost:8080/cmxcs/localhost-orcl-MDM_SAMPLE/task/urn:b4p2:15934?
taskAction=Cancel
{
    taskType: {
        name: "UpdateWithApprovalWorkflow",
        taskAction: [{name: "Cancel"}]
    },
    taskId: "urn:b4p2:15934",
    owner: "manager",
    title: "Smoke test task 222",
    comments: "Smoke testing",
    "attachments": [
        {
            "id": "TEMP_SVR1.1VDVS"
        }
    ],
    ...
}

```

After you attach a file to a task, the process moves the file from the TEMP storage and stores the file together with the task data in the BPM storage. The ID of the file changes to `taskId::filename`.

## Uploading Resource Bundle Files

To localize the Data Director user interface, download the resource bundle ZIP file, modify the files in the ZIP file, and then upload the modified ZIP file to the bundle storage.

1. To download the resource bundle ZIP file, use the Get File Content REST API with BUNDLE as the storage type.

For example, the following request downloads the resource bundle ZIP file:

```

GET http://localhost:8080/cmxcfile/localhost-orcl-MDM_SAMPLE/BUNDLE/besMetadata/
content

```

2. Modify the ZIP file by adding language specific bundle files.  
For example, to localize field names, labels, and table names to Russian, add the `besMetadata_ru.properties` file.

3. To upload the modified resource bundle ZIP file, use the Upload File Content REST API with BUNDLE as the storage type.

For example, the following request uploads the resource bundle ZIP file:

```

PUT http://localhost:8080/cmxcfile/localhost-orcl-MDM_SAMPLE/BUNDLE/besMetadata/
content

```

Content-Type: application/octet-stream  
Body: binary stream - zip file with besMetadata bundle



# APPENDIX C

## Using REST APIs to Manage Reports

This appendix includes the following topics:

- [Using REST APIs to Manage Reports Overview, 297](#)
- [REST APIs for Reports, 298](#)
- [Report Configuration, 298](#)
- [Report Data, 299](#)
- [Drilldown Reports, 300](#)
- [Out of the Box Reports, 301](#)
- [Custom Reports, 304](#)
- [Troubleshooting Report APIs, 309](#)

### Using REST APIs to Manage Reports Overview

You can use REST APIs to manage the out of the box reports and custom reports that collect information about your master data. Later, in the Provisioning tool, you can populate Chart components with the report data. Then in Data Director, users can view the charts to analyze data about their master data.

The out of the box reports collect information about predefined criteria. If you want to collect other information about your master data, use custom reports.

# REST APIs for Reports

You can use a set of REST APIs to manage reports.

The following table lists the REST APIs for reports:

REST API	Description
List Reports	Returns a list of registered reports and the configuration of the reports.
Get Report Configuration and Data	Returns the report configuration and data.
Get Report Configuration and Drilldown Reports	Returns the report configuration and associated drilldown reports.
Register Report	Registers custom reports. Returns the report ID for the report, which you can use in other APIs.
Update Report Configuration	Updates the configuration of a report.
Add or Update Report Data	Adds or updates data entries in a report.
Delete Report	Deletes a report.
Run Report Update Job	Starts the batch jobs associated with the out of the box reports.
Get Status of Report Update Job	Returns the status of a report update job.

## Report Configuration

The report configuration consists of multiple parameters, such as the report name, description, dimensions, and metric name. The report configuration of the out of the box reports is preconfigured. If you want to use custom reports, you must specify the report configuration of your custom reports.

The following table describes the parameters in a report configuration:

Parameter	Description
ROWID_RPT_CONFIG	ID of report.
DIMENSION_NAME_1	The name of a dimension of data in the report. For example, a dimension might be User Name, Review task type, or business entity type.
DIMENSION_NAME_2	Optional. The name of a dimension of data in the report. For example, a dimension might be User Name, Review task type, or business entity type.
TIMEPERIOD_NAME	Optional. Name of the period of time to which the data applies. For example, you might specify <i>Month</i> .
RPT_NAME	Name of the report.

Parameter	Description
METRIC_NAME	Label for the type of data collected by the report. By default, the value specified for this parameter appears as the name of the y-axis in the chart. For example, you might have a report that collects information about closed tasks by user. You might use the metric name <code>Number of closed tasks</code> .
RPT_DESC	Description of the report.
RPT_TYPE	Indicates whether the report is a drilldown report. If the value is <code>null</code> , then the report is a root report. If the value is anything other than <code>null</code> , then the report is a drilldown report.

## Report Data

Add data to a report so that you can populate charts with the report data. For the out of the box reports, you use the report update jobs associated to the reports to collect and add report data. If you use custom reports, you must manually add the data entries in the custom reports.

The following table describes the parameters you must configure for each data entry in a report:

Parameter	Description
DIMENSION_NAME_1	The name of a dimension of data in the report. For example, a dimension might be User Name, Review task type, or business entity type.
DIMENSION_NAME_2	Optional. The name of a dimension of data in the report. For example, a dimension might be User Name, Review task type, or business entity type.
TIMEPERIOD_NAME	Optional. Name of the period of time to which the data applies. For example, you might specify <code>Month</code> .
METRIC_VALUE	Number that represents the dimensions of data. For example, you might have a report that collects information about closed tasks by user. One dimension of the report is the user John Smith, and another dimension is the Review task type. The metric value might be 5. This means that John Smith closed five tasks of the Review task type.
DRILLDOWN_RPT_ID	ID of a drilldown report. If the value is <code>null</code> , then there is no drilldown report configured.

The following example shows three data entries in a report:

```
[
  {
    "DIMENSION_VALUE_1": "High",
    "DIMENSION_VALUE_2": "AVOSBeMerge",
    "TIMEPERIOD_VALUE": "null",
    "METRIC_VALUE": "3",
    "DRILLDOWN_RPT_ID": "null"
  },
  {
    "DIMENSION_VALUE_1": "High",
    "DIMENSION_VALUE_2": "AVOSBeReviewNoApprove",
    "TIMEPERIOD_VALUE": "null",
    "METRIC_VALUE": "0",
    "DRILLDOWN_RPT_ID": "null"
  },
]
```

```

{
  "DIMENSION_VALUE_1": "High",
  "DIMENSION_VALUE_2": "AVOSBeUpdate",
  "TIMEPERIOD_VALUE": "null",
  "METRIC_VALUE": "0",
  "DRILLDOWN_RPT_ID": "null"
}
...
]

```

## Drilldown Reports


A drilldown report contains another layer of data about a data entry in a report. You can use the drilldown reports associated to the out of the box reports or configure drilldown reports for your custom reports.

When you create custom reports, you register a root report. You can create and associate drilldown reports to data entries in the root report or data entries in other drilldown reports.

For example, you might have a report that collects information about the number tasks per each status. You can associate a drilldown report to the number of Closed tasks. The drilldown report contains the number of Closed tasks for each user. You can also associate a drilldown report to the number of Approved tasks. The drilldown report contains the number of Approved tasks for each user.

In Data Director, users might see a parent chart that shows the number of tasks per each status. Then when they select the number of Closed tasks, they drill down to a drilldown chart that shows the number of Closed tasks for each user.

The following image shows the drilldown report structure:

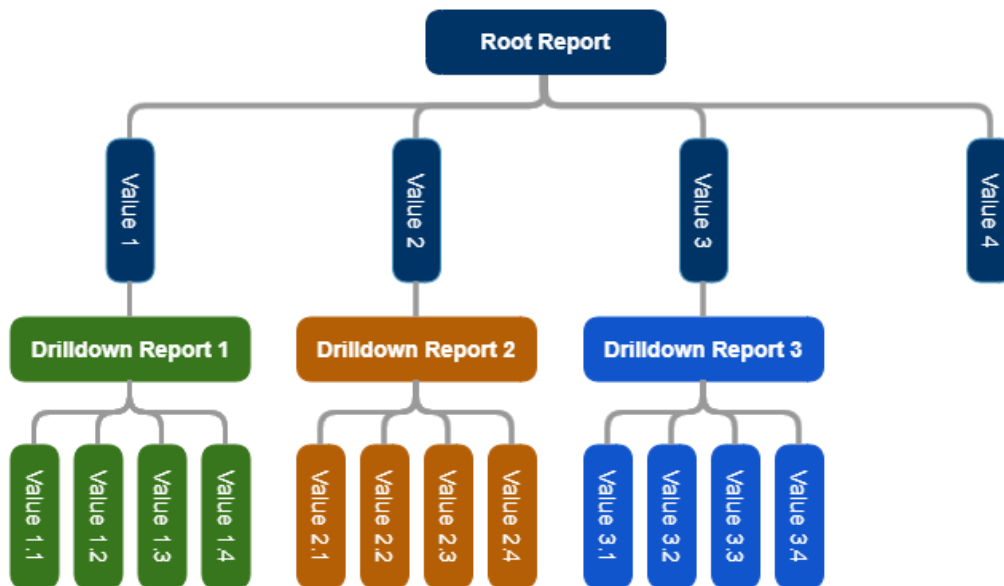

For information about the drilldown reports associated to the out of the box reports, see [“Out of the Box Reports” on page 301](#).

# Out of the Box Reports

The out of the box reports collect information about your master data. Some out of the box reports also have drilldown reports. Drilldown reports contain another layer of data about the report data.

For example, the Tasks Overview by Status report collects information about the number of tasks by status. Drilldown reports associated to the report shows the users assigned tasks for each status.

To use the out of the box reports, you must run the report update job associated to the report that you want to use. The report update job registers the report and collects information about your master data based on the report criteria. Then in the Provisioning tool, you can populate Chart components with the report data. If there are drilldown reports associated to the out of the box report, you can link your chart to a drilldown chart.

The following table describes the out of the box reports and lists the ID of each report:

Report ID	Report	Description
MDM.RPT.1	Tasks Overview by Status	Displays the total number of tasks and breaks down the tasks by status. You can drill down to users assigned for each task status.
MDM.RPT.2	Task Overview by Priority	Displays the total number of tasks and breaks down the tasks by priority. You can drill down to users assigned for each task priority.
MDM.RPT.4	Business Entities Added by Year	Displays the number of records added for each business entity type and breaks down the records by year.
MDM.RPT.5	Customer Onboarding Time	Displays how long it took to qualify records.
MDM.RPT.6	Business Entities by Source Systems	Displays the total number of records for each business entity type that comes from each source system. The detailed report breaks down the records for each pair of business entity type and source system by year.
MDM.RPT.7	Assigned Tasks by Users	Displays the total number of tasks assigned to each user.
MDM.RPT.8	Open Tasks by User Roles	Displays the total number of tasks that are open by user roles.
MDM.RPT.10	Closed Tasks by Users	Displays the total number of tasks that are closed by each user.

## Managing the Out of the Box Reports

To use the out of the box reports to collect data about your master data, run the update jobs associated to the out of the box reports. After you run the update jobs, in the Provisioning tool, you can populate Chart components with the report data.

Before you begin, review the out of the box reports and determine the reports that you want to use. For more information, see [“Out of the Box Reports” on page 301](#).

1. To run the update job associated to the out of the box report, in the browser address bar, enter the REST URL from the Run Report Update Job REST API.  
For example, the following REST URL runs the update job associated to the Tasks Overview by Status report:

```
http://localhost:8080/cmz/report/localhost-orcl-DS_UI1/data/collect/MDM.RPT.1
```

You registered the report and started collecting data based on the report criteria. The following sample response shows the status of the report update job:

```
{
  "status": "PROCESSING"
}
```

2. To retrieve the status of the report update job, in the browser address bar, enter the REST URL from the Get Status of Report Update Job REST API.

For example, following REST URL retrieves the status of the update job:

```
http://localhost:8080/cmx/report/localhost-orcl-DS_UI1/data/collect/MDM.RPT.1/status
```

The following sample response shows the status of the report update job:

```
{
  "status": "COMPLETED_SUCCESSFULLY",
  "jobId": "SVR1.2X9N1",
  "lastUpdateDate": "2019-10-31T14:37:11.846-04:00",
  "startRunDate": "2019-10-31T14:37:09.120-04:00"
}
```

3. To retrieve the report configuration and data, in the browser address bar, enter the REST URL from Get Report Configuration and Data REST API.

For example, the following REST URL retrieves the report configuration and data:

```
http://localhost:8080/cmx/report/localhost-orcl-DS_UI1/data/MDM.RPT.1
```

The following sample response shows the report configuration and data:

```
{
  "metadata":{
    "fieldsMetadata":[
      "DIMENSION_VALUE_1",
      "DIMENSION_VALUE_2",
      "TIMEPERIOD_VALUE",
      "METRIC_VALUE",
      "DRILLDOWN_RPT_ID"
    ],
    "ROWID_RPT_CONFIG":"MDM.RPT.1",
    "DIMENSION_NAME_1":"Task Status",
    "METRIC_NAME":"Number of tasks",
    "DIMENSION_NAME_2":"Task Type",
    "TIMEPERIOD_NAME":null,
    "RPT_NAME":"Task Status/Type Report",
    "RPT_DESC":"Metrics for task status/type",
    "RPT_TYPE":null
  },
  "data":[
    [
      "Overdue",
      "AVOSBeMerge",
      null,
      "36",
      "SVR1.4FCA2"
    ],
    [
      "Overdue",
      "AVOSBeReviewNoApprove",
      null,
      "189",
      "SVR1.4FC8E"
    ],
    [
      "Overdue",
      "AVOSBeUpdate",
      null,
      "1",
      "SVR1.4FCAQ"
    ],
    [

```

```

        "Overdue",
        "AVOSBeFinalReview",
        null,
        "1",
        "SVR1.4FC9W"
    ]
    ...
}
}

```

4. To retrieve the report configuration and drilldown reports, use the Get Report Configuration and Drilldown Reports REST API.

For example, the following REST URL retrieves the report configuration and drilldown reports:

```
http://localhost:8080/cmz/report/localhost-orcl-DS_UI1/meta/MDM.RPT.1
```

The following sample response shows the report configuration and drilldown reports:

```

{
  "ROWID_RPT_CONFIG": "MDM.RPT.1",
  "DIMENSION_NAME_1": "Task Status",
  "METRIC_NAME": "Number of tasks",
  "DIMENSION_NAME_2": "Task Type",
  "TIMEPERIOD_NAME": null,
  "RPT_NAME": "Task Status/Type Report",
  "RPT_DESC": "Metrics for task status/type",
  "RPT_TYPE": null,
  "DRILLDOWN": [
    {
      "RPT_NAME": "Task's Owner per Task Status and Task Type",
      "DETAILED_RPT_IDS": [
        "SVR1.4FCA3",
        "SVR1.4FCA4",
        "SVR1.4FCA5",
        "SVR1.4FCA6",
        "SVR1.4FCA7",
        "SVR1.4FC8F",
        "SVR1.4FC8G",
        "SVR1.4FC8H",
        "SVR1.4FC8I",
        "SVR1.4FC8J",
        "SVR1.4FCAR",
        "SVR1.4FCAS",
        "SVR1.4FCAT",
        "SVR1.4FCAU",
        "SVR1.4FCAV",
        "SVR1.4FC9X",
        "SVR1.4FC9Y",
        "SVR1.4FC9Z",
        "SVR1.4FCA0",
        "SVR1.4FCA1",
        "SVR1.4FC9L",
        "SVR1.4FC9M",
        "SVR1.4FC9N",
        "SVR1.4FC9O",
        "SVR1.4FC9P",
        "SVR1.4FC8L",
        "SVR1.4FC8M",
        "SVR1.4FC8N",
        "SVR1.4FC8O"
      ],
      "CONFIG_RPT_IDS": [
        "SVR1.4FCA2",
        "SVR1.4FC8E",
        "SVR1.4FCAQ",
        "SVR1.4FC9W",
        "SVR1.4FC9K",
        "SVR1.4FC8K",
        "SVR1.4FCAW",
        "SVR1.4FC9E",
        "SVR1.4FC88"
      ]
    }
  ]
}

```

```

        "SVR1.4FC8W",
        "SVR1.4FC82",
        "SVR1.4FC92",
        "SVR1.4FC98",
        "SVR1.4FCAE",
        "SVR1.4FCA8",
        "SVR1.4FCB8",
        "SVR1.4FC9Q",
        "SVR1.4FCAK",
        "SVR1.4FC8Q",
        "SVR1.4FCB2"
    ]
}
}
}

```

## Custom Reports

If the out of the box reports do not meet your business requirements, you can configure custom reports to collect other information about your master data. For example, you might want to collect information about the number of closed tasks by priority.

To use custom reports, you must configure and register the reports, and then add data entries to the report. To associate drilldown reports to the report data, you configure and register the drilldown reports. Then you can associate the drilldown report to a data entry in the custom report.

## Managing Custom Reports

Register and configure the custom reports that you want to use to collect information about your master data. Then in the Provisioning tool, you can populate the Chart component with the report data.

Before you begin, determine the data you want to collect.

1. To review the registered reports, use the List Reports REST API.  
For example, the following request lists the registered root reports:

```
GET http://localhost:8080/cmz/report/localhost-orcl-DS_UI1/list
```

2. To register a custom report, use the Register Report REST API.  
For example, the following request registers a custom report:

```
POST http://localhost:8080/cmz/report/localhost-orcl-DS_UI1/list
{
  "DIMENSION_NAME_1": "Task Priority",
  "DIMENSION_NAME_2": "Task Type",
  "TIMEPERIOD_NAME": "null",
  "RPT_NAME": "Task Priority/Type Report",
  "RPT_DESC": "Metrics for task status/type",
  "METRIC_NAME": "Number of tasks"
}
```

The following sample response shows the registered report:

```
{
  "ROWID_RPT_CONFIG": "SVR1.2X9N0",
  "DIMENSION_NAME_1": "Task Priority",
  "DIMENSION_NAME_2": "Task Type",
  "TIMEPERIOD_NAME": "null",
  "RPT_NAME": "Task Priority/Type Report",
  "RPT_DESC": "Metrics for task status/type",
  "METRIC_NAME": "Number of tasks",
}
```



```

    "RPT_TYPE": "null"
  }

```

The request returns the report ID in the ROWID\_RPT\_CONFIG parameter.

- To add data entries in a report, use the Add or Update Report Data REST API. For example, the following request adds data entries in a report:

```

POST http://localhost:8080/cmx/report/localhost-orcl-DS_UI1/data/SVR1.2X9N0
[
  {
    "DIMENSION_VALUE_1": "High",
    "DIMENSION_VALUE_2": "AVOSBeMerge",
    "TIMEPERIOD_VALUE": "null",
    "METRIC_VALUE": "3",
    "DRILLDOWN_RPT_ID": "null"
  },
  {
    "DIMENSION_VALUE_1": "High",
    "DIMENSION_VALUE_2": "AVOSBeReviewNoApprove",
    "TIMEPERIOD_VALUE": "null",
    "METRIC_VALUE": "0",
    "DRILLDOWN_RPT_ID": "null"
  },
  {
    "DIMENSION_VALUE_1": "High",
    "DIMENSION_VALUE_2": "AVOSBeUpdate",
    "TIMEPERIOD_VALUE": "null",
    "METRIC_VALUE": "0",
    "DRILLDOWN_RPT_ID": "null"
  }
  ...
]

```

- To retrieve the report configuration and data, use the Get Report Configuration and Data REST API. For example, the following request retrieves the report configuration and data:

```

GET http://localhost:8080/cmx/report/localhost-orcl-DS_UI1/data/SVR1.2X9N0

```

The following sample response shows the report configuration and the data:

```

{
  "metadata":{
    "fieldsMetadata":[
      "DIMENSION_VALUE_1",
      "DIMENSION_VALUE_2",
      "TIMEPERIOD_VALUE",
      "METRIC_VALUE",
      "DRILLDOWN_RPT_ID"
    ],
    "ROWID_RPT_CONFIG": "MDM.RPT.2",
    "DIMENSION_NAME_1": "Task Priority",
    "METRIC_NAME": "Number of tasks",
    "DIMENSION_NAME_2": "Task Type",
    "TIMEPERIOD_NAME": "null",
    "RPT_NAME": "Task Priority/Type Report",
    "RPT_DESC": "Metrics for task status/type",
    "RPT_TYPE": "null"
  },
  "data":[
    [
      "High",
      "AVOSBeMerge",
      "null",
      "3",
      "SVR1.48P5G"
    ],
    [
      "High",
      "AVOSBeReviewNoApprove",
      "null",

```

```

        "0",
        "null"
    ],
    [
        "High",
        "AVOSBeUpdate",
        null,
        "0",
        "null"
    ],
    [
        "High",
        "AVOSBeFinalReview",
        null,
        "0",
        "null"
    ]
    ]
    ...
}

```

5. To delete a report, use the Delete Report REST API.  
For example, the following request deletes a report:

```
DELETE http://localhost:8080/cmz/report/localhost-orcl-DS_UI1/data/SVR1.2X9N0
```

## Managing Custom Reports with Drilldown Reports

Register the custom reports that you want to use and add data entries to your report. Then register the drilldown reports and add data entries to the drilldown reports. When you add or update data entries in your root reports, you can associate your drilldown reports to the data entries. Then in the Provisioning tool, you can populate the Chart component with the report data and link the root chart to a drilldown chart.

Before you begin, determine the data you want to collect. Also, determine the drilldown reports you want to configure and associate to your data entries in your custom report.

1. To review the registered reports, use the List Reports REST API.  
For example, the following request lists the registered root reports and drilldown reports:

```
GET http://localhost:8080/cmz/report/localhost-orcl-DS_UI1/list?show=all
```

2. To register a custom report, use the Register Report REST API.  
For example, the following request registers a custom report:

```
POST http://localhost:8080/cmz/report/localhost-orcl-DS_UI1/list
{
  "DIMENSION_NAME_1": "Task Priority",
  "DIMENSION_NAME_2": "Task Type",
  "TIMEPERIOD_NAME": "null",
  "RPT_NAME": "Task Priority/Type Report",
  "RPT_DESC": "Metrics for task status/type",
  "METRIC_NAME": "Number of tasks"
}
```

The following sample response shows the registered report:

```
{
  "ROWID_RPT_CONFIG": "SVR1.2X9N0",
  "DIMENSION_NAME_1": "Task Priority",
  "DIMENSION_NAME_2": "Task Type",
  "TIMEPERIOD_NAME": "null",
  "RPT_NAME": "Task Priority/Type Report",
  "RPT_DESC": "Metrics for task status/type",
  "METRIC_NAME": "Number of tasks",
  "RPT_TYPE": "null"
}
```

The request returns the report ID in the `ROWID_RPT_CONFIG` parameter.

3. To add data entries in a root report, use the Add or Update Report Data REST API.

Later, you can associate a drilldown report to a data entry.

For example, the following request adds data entries in a report:

```
POST http://localhost:8080/cm/./report/localhost-orcl-DS_UI1/data/SVR1.2X9N0
[
  {
    "DIMENSION_VALUE_1": "High",
    "DIMENSION_VALUE_2": "AVOSBeMerge",
    "TIMEPERIOD_VALUE": "null",
    "METRIC_VALUE": "3",
    "DRILLDOWN_RPT_ID": "null"
  },
  {
    "DIMENSION_VALUE_1": "High",
    "DIMENSION_VALUE_2": "AVOSBeReviewNoApprove",
    "TIMEPERIOD_VALUE": "null",
    "METRIC_VALUE": "0",
    "DRILLDOWN_RPT_ID": "null"
  },
  {
    "DIMENSION_VALUE_1": "High",
    "DIMENSION_VALUE_2": "AVOSBeUpdate",
    "TIMEPERIOD_VALUE": "null",
    "METRIC_VALUE": "0",
    "DRILLDOWN_RPT_ID": "null"
  }
  ...
]
```

4. To register a drilldown report, use the Register Report REST API.

For example, the following request registers the drilldown report:

```
POST http://localhost:8080/cm/./report/localhost-orcl-DS_UI1/list
{
  "DIMENSION_NAME_1": "Task's Owner",
  "DIMENSION_NAME_2": "null",
  "TIMEPERIOD_NAME": "null",
  "RPT_NAME": "Task's Owner per Task Priority and Task Type",
  "RPT_DESC": "Number of tasks for each users for Task Priority/Task Type",
  "METRIC_NAME": "Number of Tasks"
}
```

The following sample response shows the registered drilldown report:

```
{
  "ROWID_RPT_CONFIG": "SVR1.48P5G",
  "DIMENSION_NAME_1": "Task's Owner",
  "DIMENSION_NAME_2": "null",
  "TIMEPERIOD_NAME": "null",
  "RPT_NAME": "Task's Owner per Task Priority and Task Type",
  "RPT_DESC": "Number of tasks for each users for Task Priority/Task Type",
  "METRIC_NAME": "Number of Tasks",
  "RPT_TYPE": "High/AVOSBeMerge"
}
```

The request returns the drilldown report ID in the ROWID\_RPT\_CONFIG parameter.

5. To add data entries in a drilldown report, use the Add or Update Report Data REST API.

For example, the following request adds data entries in a drilldown report:

```
POST http://localhost:8080/cm/./report/localhost-orcl-DS_UI1/data/SVR1.48P5G
[
  {
    "DIMENSION_VALUE_1": "admin",
    "DIMENSION_VALUE_2": "null",
    "TIMEPERIOD_VALUE": "null",
    "METRIC_VALUE": "0",
    "DRILLDOWN_RPT_ID": "null"
  },
  ...
]
```

```

    {
      "DIMENSION_VALUE_1": "srmgr2",
      "DIMENSION_VALUE_2": "null",
      "TIMEPERIOD_VALUE": "null",
      "METRIC_VALUE": "0",
      "DRILLDOWN_RPT_ID": "null"
    },
    {
      "DIMENSION_VALUE_1": "mgr2",
      "DIMENSION_VALUE_2": "null",
      "TIMEPERIOD_VALUE": "null",
      "METRIC_VALUE": "0",
      "DRILLDOWN_RPT_ID": "null"
    }
  ]
}

```

6. To associate a drilldown report to a data entry in a report, use the Add or Update Report Data REST API. Specify the drilldown report ID in `DRILLDOWN_RPT_ID` parameter.

For example, the following request associates a drilldown report to the data entry:

```

POST http://localhost:8080/cm/report/localhost-orcl-DS_UI1/data/SVR1.2X9N0
[
  {
    "DIMENSION_VALUE_1": "High",
    "DIMENSION_VALUE_2": "AVOSBeMerge",
    "TIMEPERIOD_VALUE": "null",
    "METRIC_VALUE": "5",
    "DRILLDOWN_RPT_ID": "SVR1.48P5G"
  }
]

```

7. To retrieve the report configuration and data, use the Get Report Configuration and Data REST API. For example, the following request retrieves the report configuration and data:

```
GET http://localhost:8080/cm/report/localhost-orcl-DS_UI1/data/SVR1.2X9N0
```

The following sample response shows the report configuration and the data:

```

{
  "metadata": {
    "fieldsMetadata": [
      "DIMENSION_VALUE_1",
      "DIMENSION_VALUE_2",
      "TIMEPERIOD_VALUE",
      "METRIC_VALUE",
      "DRILLDOWN_RPT_ID"
    ],
    "ROWID_RPT_CONFIG": "SVR1.2X9N0",
    "DIMENSION_NAME 1": "Task Priority",
    "METRIC_NAME": "Number of tasks",
    "DIMENSION_NAME 2": "Task Type",
    "TIMEPERIOD_NAME": "null",
    "RPT_NAME": "Task Priority/Type Report",
    "RPT_DESC": "Metrics for task status/type",
    "RPT_TYPE": "null"
  },
  "data": [
    [
      "High",
      "AVOSBeMerge",
      "null",
      "3",
      "SVR1.48P5G"
    ],
    [
      "High",
      "AVOSBeReviewNoApprove",
      "null",
      "0",
      "null"
    ]
  ]
}

```

```

    [
      "High",
      "AVOSBeUpdate",
      "null",
      "0",
      "null"
    ],
    [
      "High",
      "AVOSBeFinalReview",
      "null",
      "0",
      "null"
    ]
  ]
  ...
}

```

- To retrieve the registered reports, including your custom reports and drilldown reports, use the List Reports REST API.

For example, the following request lists the registered root reports and drilldown reports:

```
GET http://localhost:8080/cmz/report/localhost-orcl-DS_UI1/list?show=all
```

The following sample response shows the registered root reports and drilldown reports:

```

[
  {
    "ROWID_RPT_CONFIG": "SVR1.2X9N0",
    "DIMENSION_NAME_1": "Task Priority",
    "METRIC_NAME": "Number of tasks",
    "DIMENSION_NAME_2": "Task Type",
    "TIMEPERIOD_NAME": "null",
    "RPT_NAME": "Task Priority/Type Report",
    "RPT_DESC": "Metrics for task status/type",
    "RPT_TYPE": "null"
  },
  {
    "ROWID_RPT_CONFIG": "SVR1.48P5G",
    "DIMENSION_NAME_1": "Task's Owner",
    "DIMENSION_NAME_2": "null",
    "TIMEPERIOD_NAME": "null",
    "RPT_NAME": "Task's Owner per Task Priority and Task Type",
    "RPT_DESC": "Number of tasks for each users for Task Priority/Task Type",
    "METRIC_NAME": "Number of Tasks",
    "RPT_TYPE": "High/AVOSBeMerge"
  }
]

```

- To delete a report, use the Delete Report REST API.

For example, the following request deletes a report:

```
DELETE http://localhost:8080/cmz/report/localhost-orcl-DS_UI1/data/SVR1.2X9N0
```

## Troubleshooting Report APIs

If you encounter issues with the report APIs, use the following information to troubleshoot.

### Failed to run the update jobs associated to the out of the box reports.

The report services might not be connected to ActiveVOS. If you edited the ActiveVOS EAR files to customize the JNDI lookup string, you must add the `activevos.jndi` property to the `cmxserver.properties` file and specify the custom JNDI lookup string. For more information, see the *Multidomain MDM Configuration Guide*.

# INDEX

## A

authentication  
  basic HTTP [25](#)  
  method [25](#)  
  using cookies [25](#), [247](#)

## B

business entity service  
  ReadBE [12](#)  
business entity service steps  
  SearchBE [12](#)  
  WriteBE [12](#)  
business entity services  
  DaaS import [266](#)  
  DaaS update [266](#)  
  EJB endpoint [13](#)  
  endpoints [13](#)  
  REST API reference [35](#)  
  REST endpoint [13](#)  
  REST endpoints [24](#)  
  SOAP endpoint [14](#)  
  SOAP endpoints [246](#)

## C

configuring  
  external calls [268](#)  
corporate linkage  
  supporting [265](#)  
create record  
  response body [52](#)  
  response header [52](#)  
  URL parameters [51](#)  
create Record  
  request URL [51](#)  
create task  
  request URL [82](#)

## D

date format  
  about [30](#)  
delete record  
  request URL [56](#)  
  URL parameter [57](#)  
deleted record  
  restore [12](#)

## E

effective periods  
  WriteBE [12](#)  
example  
  custom logic [269](#)  
  external calls [269](#)  
execute task action  
  request body [90](#)  
external calls  
  overview [267](#)

## G

get event details  
  query parameters [215](#)  
get record history events  
  query parameters [213](#)

## L

linkage data  
  custom application [266](#)  
  splitting [266](#)  
linkage service  
  configuration [266](#)  
list task  
  request URL [75](#)  
list tasks  
  query parameters [75](#)  
  sort parameters [76](#)

## P

preface [9](#)

## Q

query parameters  
  depth [30](#)  
  firstRecord [30](#)  
  recordsToReturn [30](#)  
  returnTotal [30](#)  
  searchToken [30](#)

## R

read record  
  query parameters [46](#)  
read task  
  request URL [80](#)

- ReadBE
  - business entity service [12](#)
- records
  - adding [275](#)
  - using REST APIs [275](#)
- REST APIs
  - add or update report details [224](#)
  - body [27](#)
  - bulk assign tasks [96](#)
  - bulk claim tasks [93](#)
  - bulk edit tasks [97](#)
  - bulk promote [193](#)
  - bulk reject [199](#)
  - bulk relationship changes [190](#)
  - bulk release tasks [94](#)
  - bulk task action [99](#)
  - create a relationship [156](#)
  - create file metadata [106](#)
  - create record [50](#)
  - create task [82](#)
  - DaaS import [240](#)
  - DaaS read [237](#)
  - DaaS search [232](#)
  - DaaS update [243](#)
  - delete a relationship [159](#)
  - delete file [110](#)
  - delete matched records [205](#)
  - delete pending [129](#)
  - delete record [56](#)
  - delete report [225](#)
  - execute task action [90](#)
  - export direct children and parents [183](#)
  - export hierarchy [182](#)
  - get BPM metadata [74](#)
  - get children [175](#)
  - get DaaS metadata [231](#)
  - get event details [215](#)
  - get file content [110](#)
  - get file metadata [107](#)
  - get hierarchy changes [184](#)
  - get hierarchy metadata [165](#)
  - get hierarchy path [170](#)
  - get matched records [203](#)
  - get metadata [35](#)
  - get parents [173](#)
  - get record history events [212](#)
  - get related records [160](#)
  - get report configuration and data [218](#)
  - get report configuration and drilldown reports [220](#)
  - get status of report update job [227](#)
  - get task actions [101](#)
  - header [27](#)
  - list assignable users [92](#)
  - list file metadata [105](#)
  - list hierarchies [164](#)
  - list match columns [43](#)
  - list metadata [38](#)
  - list potential owners for a task [104](#)
  - list potential owners for tasks [103](#)
  - list record [57](#)
  - list reports [216](#)
  - list tasks [75](#)
  - merge records [140](#)
  - pending merge [135](#)
  - preview merge [130](#)
  - preview promote [127](#)
  - promote merge [136](#)
  - promote record [129](#)

- REST APIs (*continued*)
  - read record [44](#)
  - read relationship [154](#)
  - read task [80](#)
  - register report [222](#)
  - request body [28](#)
  - request header [28](#)
  - run report update job [226](#)
  - search record [59](#)
  - SearchMatch [69](#)
  - SearchQuery [65](#)
  - suggester [64](#)
  - task complete [88](#)
  - unmerge records [142](#)
  - update a relationship [158](#)
  - update file metadata [108](#)
  - update matched records [204](#)
  - update record [53](#)
  - update report configuration [223](#)
  - update task [85](#)
- REST body
  - JSON format [29](#)
  - XML format [28](#)
- REST methods
  - DELETE [25](#)
  - GET [25](#)
  - PATCH [25](#)
  - POST [25](#)
  - PUT [25](#)
  - supported [25](#)
- restore
  - soft-deleted record [12](#)
- root records
  - identifying [14](#)

## S

- SearchBE
  - about [12](#)
- SearchMatch
  - exporting results [73](#)
- SearchQuery
  - exporting results [69](#)
- SOAP APIs
  - authentication [247](#)
  - request [249](#)
  - response [249](#)
  - WSDL [248](#)
- supported events
  - list [268](#)

## T

- testing external calls
  - prerequisites [269](#)
- time zone
  - about [30](#)
- trust
  - WriteBE [12](#)

## U

- update record
  - response body [55](#)
  - response header [55](#)

update record (*continued*)  
URL parameters [53](#)  
UTC  
about [30](#)

## W

WriteBE  
business entity service step [12](#)