



Informatica™

Informatica® Cloud Data Integration

SAP HANA Connector

© Copyright Informatica LLC 2020, 2021

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, the Informatica logo, Informatica Cloud, and PowerCenter are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at <https://www.informatica.com/trademarks.html>. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

See patents at <https://www.informatica.com/legal/patents.html>.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2021-08-06

Table of Contents

Preface	5
Informatica Resources.	5
Informatica Documentation.	5
Informatica Intelligent Cloud Services web site.	5
Informatica Intelligent Cloud Services Communities.	5
Informatica Intelligent Cloud Services Marketplace.	5
Data Integration connector documentation.	6
Informatica Knowledge Base.	6
Informatica Intelligent Cloud Services Trust Center.	6
Informatica Global Customer Support.	6
Chapter 1: Introduction to SAP HANA Connector	7
SAP HANA Connector overview.	7
Chapter 2: SAP HANA Connector administration	8
SAP HANA Connector administration overview.	8
Verifying if the required licenses are available for SAP HANA Connector.	8
Appending HANA driver details to odbinst.ini file in Linux.	9
Downloading and configuring the ngdbc.jar file	9
Chapter 3: SAP HANA connections	10
SAP HANA connections overview.	10
SAP HANA connection properties.	10
Chapter 4: Mappings and mapping tasks with SAP HANA Connector	12
SAP HANA sources in mappings.	12
Input types for HANA modelling views.	13
SAP HANA targets in mappings.	14
SAP HANA lookups in mappings.	15
Rules and guidelines for SAP HANA mappings.	16
Creating an SAP HANA mapping with modelling views.	16
Chapter 5: SAP HANA pushdown optimization	18
SAP HANA Pushdown optimization overview.	18
Configuring optimization for an SAP HANA mapping task.	18
Pushdown optimization supported operations, functions, operators, and transformations.	19
Chapter 6: Data type reference	22
Data type reference overview.	22
SAP HANA and transformation data types.	22

Index..... 25

Preface

Use *SAP HANA Connector* to learn how to read from or write data to SAP HANA database by using Cloud Data Integration. Learn to create an SAP HANA connection, develop mappings, and run mapping tasks and data transfer tasks in Cloud Data Integration.

Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit <https://docs.informatica.com>.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

Informatica Intelligent Cloud Services web site

You can access the Informatica Intelligent Cloud Services web site at <http://www.informatica.com/cloud>. This site contains information about Informatica Cloud integration services.

Informatica Intelligent Cloud Services Communities

Use the Informatica Intelligent Cloud Services Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the Informatica Intelligent Cloud Services Community at:

<https://network.informatica.com/community/informatica-network/products/cloud-integration>

Developers can learn more and share tips at the Cloud Developer community:

<https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers>

Informatica Intelligent Cloud Services Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

<https://marketplace.informatica.com/>

Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit <https://docs.informatica.com>.

Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit <https://search.informatica.com>. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

Informatica Intelligent Cloud Services Trust Center

The Informatica Intelligent Cloud Services Trust Center provides information about Informatica security policies and real-time system availability.

You can access the trust center at <https://www.informatica.com/trust-center.html>.

Subscribe to the Informatica Intelligent Cloud Services Trust Center to receive upgrade, maintenance, and incident notifications. The [Informatica Intelligent Cloud Services Status](#) page displays the production status of all the Informatica cloud products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single component or all Informatica Intelligent Cloud Services components. Subscribing to all components is the best way to be certain you never miss an update.

To subscribe, go to <https://status.informatica.com/> and click **SUBSCRIBE TO UPDATES**. You can then choose to receive notifications sent as emails, SMS text messages, webhooks, RSS feeds, or any combination of the four.

Informatica Global Customer Support

You can contact a Customer Support Center by telephone or online.

For online support, click **Submit Support Request** in Informatica Intelligent Cloud Services. You can also use Online Support to log a case. Online Support requires a login. You can request a login at <https://network.informatica.com/welcome>.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at <https://www.informatica.com/services-and-training/support-services/contact-us.html>.

CHAPTER 1

Introduction to SAP HANA Connector

This chapter includes the following topic:

- [SAP HANA Connector overview, 7](#)

SAP HANA Connector overview

SAP HANA Connector is a hybrid connector that uses JDBC at design time and ODBC at run time. You can use SAP HANA Connector to read from or write data to SAP HANA databases. You can use SAP HANA objects as sources or targets in mappings and mapping tasks.

You can read data from SAP HANA database tables, views, and modelling views.

Lookups are supported for SAP HANA database tables and views. You cannot configure lookups for SAP HANA database modelling views.

SAP HANA Connector supports the following HANA database modelling views:

- Attribute views
- Analytical views
- Calculation views

CHAPTER 2

SAP HANA Connector administration

This chapter includes the following topics:

- [SAP HANA Connector administration overview, 8](#)
- [Verifying if the required licenses are available for SAP HANA Connector, 8](#)
- [Appending HANA driver details to odbcinst.ini file in Linux, 9](#)
- [Downloading and configuring the ngdbc.jar file, 9](#)

SAP HANA Connector administration overview

Before users can use an SAP HANA connection to process SAP HANA data, an SAP administrator must perform the following tasks:

1. Verify if the required licences are enabled.
2. Install the 64-bit HANA ODBC driver.
3. Append an entry to the `odbcinst.ini` file on Linux.
4. Download and configure the `ngdbc.jar` file.

After the administrator has performed the configuration, users can set up and use an SAP HANA connection in mappings and mapping tasks.

Verifying if the required licenses are available for SAP HANA Connector

You must verify if the required licences for SAP HANA Connector are available before you create an SAP HANA connection and process SAP HANA data.

1. In the Informatica Intelligent Cloud Services home page, click the **Administrator** tab.
2. Under **Licences**, verify if the **SAP HANA** license is enabled.

Appending HANA driver details to odbcinst.ini file in Linux

After you install the Secure Agent, install the 64-bit HANA ODBC driver. SAP HANA Connector uses ODBC during run time. Hence, you require the `odbcinst.ini` file in Linux. Append the HANA driver details to the `odbcinst.ini` file.

The `odbcinst.ini` file is available at the location of the Secure Agent installer. Append the following HANA driver details to the `odbcinst.ini` file in Linux to connect to the HANA database as shown in the example below:

```
[HDBODBC]
Driver=/usr/sap/hdbclient/libodbcHDB.so
Description=HANA Driver
Setup=/usr/sap/hdbclient/libodbcHDB.so
CPTimeout=0
```

Note: In the example, the following path is the location for the driver installation: `/usr/sap/hdbclient/`

The `odbc.ini` and `odbcinst.ini` files must be in the same location.

Downloading and configuring the ngdbc.jar file

SAP HANA Connector uses JDBC to import the metadata. Hence, to read data from the SAP HANA database, you must download the `ngdbc.jar` file and configure it on the machine where the Secure Agent runs. Contact SAP Customer Support if you encounter any issues with downloading the file.

1. Go to the SAP Service Marketplace: <http://service.sap.com/connectors>.

Note: You will need SAP credentials to access the Service Marketplace.

2. Download the `ngdbc.jar` file on the Linux or Windows machine where the Secure Agent runs.

Verify that you download the most recent version of the file.

3. Copy the `ngdbc.jar` file to the following directory:

```
C:\Program Files\Informatica Cloud Secure Agent\apps\Data_Integration_Server\ext
\deploy_to_main\bin\rdtm-extra\HANA
```

Create the `deploy_to_main\bin\rdtm-extra\HANA` directory if it does not already exist.

4. Restart the Secure Agent.

CHAPTER 3

SAP HANA connections

This chapter includes the following topics:

- [SAP HANA connections overview, 10](#)
- [SAP HANA connection properties, 10](#)

SAP HANA connections overview

Create an SAP HANA connection to connect to SAP HANA and read data from SAP HANA. You can use an SAP HANA connection in mappings and mapping tasks.

You can create an SAP HANA connection on the **Connections** page and create a mapping or mapping task.

Use the **SAP HANA** connection type to connect to SAP HANA.

SAP HANA connection properties

When you set up an SAP HANA connection, you must configure the connection properties.

The following table describes the SAP HANA connection properties:

Connection property	Description
Runtime Environment	Runtime environment that contains the Secure Agent used to access SAP HANA.
Host	SAP HANA server host name.
Port	SAP HANA server port number.
Database Name	Name of the SAP HANA database.
Current Schema	SAP HANA database schema name. Specify _SYS_BIC when you use SAP HANA database modelling views.
Code Page	The code page of the database server defined in the connection. Select the UTF-8 code page.

Connection property	Description
Metadata Advanced Connection Properties	<p>The optional properties for the JDBC driver to fetch the metadata. If you specify more than one property, separate each key-value pair with a semicolon. For example,</p> <pre data-bbox="643 432 902 457">connectTimeout=180000</pre>
Run-time Advanced Connection Properties	<p>The optional properties for the ODBC driver for running mappings. If you specify more than one property, separate each key-value pair with a semicolon. For example,</p> <pre data-bbox="643 611 984 636">charset=sjis;readtimeout=180</pre>
Username	User name of the SAP HANA account.
Password	Password of the SAP HANA account.

CHAPTER 4

Mappings and mapping tasks with SAP HANA Connector

This chapter includes the following topics:

- [SAP HANA sources in mappings, 12](#)
- [SAP HANA targets in mappings, 14](#)
- [SAP HANA lookups in mappings, 15](#)
- [Rules and guidelines for SAP HANA mappings, 16](#)
- [Creating an SAP HANA mapping with modelling views, 16](#)

SAP HANA sources in mappings

To read data from an SAP HANA database, configure an SAP HANA object as the Source transformation in a mapping.

Specify the name and description of the SAP HANA source. Configure the source, query options, and advanced properties for the source object.

The following table describes the source properties that you can configure for an SAP HANA source:

Property	Description
Connection	Name of the SAP HANA source connection.
Source Type	Type of the SAP HANA source object available. You can choose from the following source types: <ul style="list-style-type: none">- Single- Multiple- Query- Parameter
Object	Name of the SAP HANA source object.

Property	Description
Filter	A simple filter includes a field name, operator, and value. Use an advanced filter to define a more complex filter condition, which can include multiple conditions using the AND or OR logical operators. Use single quotes to specify a filter value.
Select distinct rows only	Select this option to extract only distinct rows.

When you configure a mapping, you can configure the advanced source properties. The following table describes the SAP HANA advanced source properties:

Property	Description
Pre SQL	Pre-SQL command to run before reading data from the source.
Post SQL	Post-SQL command to run after reading data from the source.
Output is Deterministic	When you configure this property, the Secure Agent does not stage source data for recovery if transformations in the pipeline always produce repeatable data.
Output is repeatable	When the output is deterministic and the output is repeatable, the Secure Agent does not stage the source data for recovery.
Tracing level	Amount of detail that appears in the log for this transformation. You can choose terse, normal, verbose initialization, or verbose data. Default is normal.

Input types for HANA modelling views

You can use the following input types when you read data from HANA modelling views:

- Variables. A variable is a filter. A variable is associated with a field, for example, company name, of the view.

Provide the variable value in the field that you specified in SAP.

The following image shows the variable VAR_01 associated with COMPANY and PO_CATEGORY fields:

The screenshot shows the 'Source' configuration page in SAP HANA. The 'Filter' field is highlighted with a red box and contains the following SQL query:

```

/ANLV_PURCHASE_ORDER_USING_VAR_01.COMPANY = '1000'
/ANLV_PURCHASE_ORDER_USING_VAR_01.PO_CATEGORY = 'ER'

```

Other visible fields include 'Connection' (HANA_View_Win64 (SAP HANA)), 'Source Type' (Single Object), and 'Object' (/ANLV_PURCHASE_ORDER_USING_V).

- Parameters. An input parameter is a placeholder to the query. You can use parameters to insert values for analytical views and calculation views. The data type for an input parameter in Data Integration is `char`. Specify the data for input parameters in the format that you defined in SAP. When you create a mapping and use input parameters, do not connect the input parameters in the source to the output fields. Otherwise, the mapping fails. For more information, see ["Input parameter types" on page 14](#).

Input parameter types

When you select a HANA modelling view, Informatica adds a prefix to the parameter name. The prefix is used to indicate the parameter type.

You can use the following types of parameters:

- Mandatory Parameter.** A parameter for which you are required to specify a value. For example, in the field `PARAM_M_ip_param_4_empID1`, `PARAM_M` is the prefix for a mandatory parameter that Informatica adds. `ip_param_4_empID1` is the parameter name that is a part of HANA modelling views.
- Optional Parameter.** A parameter for which you do not need to provide a value. For example, in the field `PARAM_O_par_4_sal_hike`, `PARAM_O` is the prefix for an optional parameter that Informatica adds. `par_4_sal_hike` is the parameter name that is a part of HANA modelling views.

The following image shows the mandatory parameter `PARAM_M_ip_param_4_empID1` and the optional parameter `PARAM_O_par_4_sal_hike`:

ID	Name	Data Type	Length	Precision	Target Name
4	CALDATE	date/time	29	9	CAL_4_EMP_STAR_JOIN_WIT...
5	CALMONTH	string	2	0	/CAL_4_EMP_STAR_JOIN_WIT...
6	CALYEAR	string	4	0	CAL_4_EMP_STAR_JOIN_WIT...
7	EMPID	string	10	0	CAL_4_EMP_STAR_JOIN_WIT...
8	EMPNAME	string	60	0	CAL_4_EMP_STAR_JOIN_WIT...
9	cal_col_4_sal_hike	double	15	0	CAL_4_EMP_STAR_JOIN_WIT...
10	cal_col_4_new_sal	double	15	0	CAL_4_EMP_STAR_JOIN_WIT...
11	EMPSAL	decimal	15	2	CAL_4_EMP_STAR_JOIN_WIT...
12	EMPBONUS	decimal	15	2	CAL_4_EMP_STAR_JOIN_WIT...
13	restrict_col	decimal	15	2	CAL_4_EMP_STAR_JOIN_WIT...
14	PARAM_M_ip_param_4_empID1	string	10	0	CAL_4_EMP_STAR_JOIN_WIT...
15	PARAM_M_ip_par_4_empID2	string	10	0	CAL_4_EMP_STAR_JOIN_WIT...
16	PARAM_O_par_4_sal_hike	double	15	0	CAL_4_EMP_STAR_JOIN_WIT...

SAP HANA targets in mappings

To write data to an SAP HANA database, configure an SAP HANA object as the Target transformation in a mapping.

Specify the name and description of the SAP HANA target. Configure the target and advanced properties for the source object.

The following table describes the source properties that you can configure for an SAP HANA source:

Property	Description
Connection	The name of the SAP HANA target connection.
Target Type	The type of the SAP HANA target object available. You can choose from the following target types: - Single Object - Parameter Note: Multiple objects target type is not applicable.
Object	The name of the SAP HANA target object. You can select an existing target object or create an SAP HANA target at runtime with an object name that you specify.
Operation	The target operation. You can choose from the following operations: - Insert - Update - Upsert - Delete - Data Driven
Truncate target	The Secure Agent truncates the target before writing the data.

When you configure a mapping, you can configure the advanced target properties. The following table describes the SAP HANA advanced target properties:

Property	Description
Pre SQL	The SQL statement that you want to run before reading data from the source.
Post SQL	The SQL statement that you want to run after writing data into the target.
Success File Directory	Not applicable.
Error File Directory	Not applicable.
Forward Rejected Rows	Determines whether the transformation passes rejected rows to the next transformation or drops rejected rows. By default, the agent forwards rejected rows to the next transformation.

SAP HANA lookups in mappings

When you configure field mappings, you can create a lookup to an SAP HANA object. Lookups are only supported for SAP HANA database tables and views. You cannot configure lookups for SAP HANA database modelling views.

Rules and guidelines for SAP HANA mappings


Use the following rules and guidelines when you configure a SAP HANA mapping:

- When you create a target using the **Create New at Runtime** option, you cannot use records with the Time data types.
- You cannot read or write data that contains Unicode characters in the SAP HANA table name or the column name.
- When you configure a mapping with the **Create New at Runtime** option and the source table type is a row or column, the Secure Agent creates a row-based table, irrespective of the source table type.
- Partitioning is not applicable.
- When you create a target using the **Create New at Runtime** option, ensure that the length of any of the columns in the HANA target table must not exceed 5000 characters.
- You cannot override the source and target object parameters in an SAP HANA mapping at run time with values specified in a parameter file.
- You cannot override the SAP HANA connection in a mapping at run time with values specified in a parameter file.

Creating an SAP HANA mapping with modelling views

You can use an SAP HANA object as a source in mappings and mapping tasks. Perform the following steps to create a mapping:

1. Click the Data Integration service.
2. Click **New > Mappings > Create**.
3. Click **Source** in the Design pane.
4. Click **Source** in the Properties pane.
5. Select a connection.
6. Select the **Source Type** as **Single Object**.
7. Click **Select** to select the object name.
The **Select Source Object** page appears.
8. Select a source object from the list of objects.
A list of objects is shown in the following image:

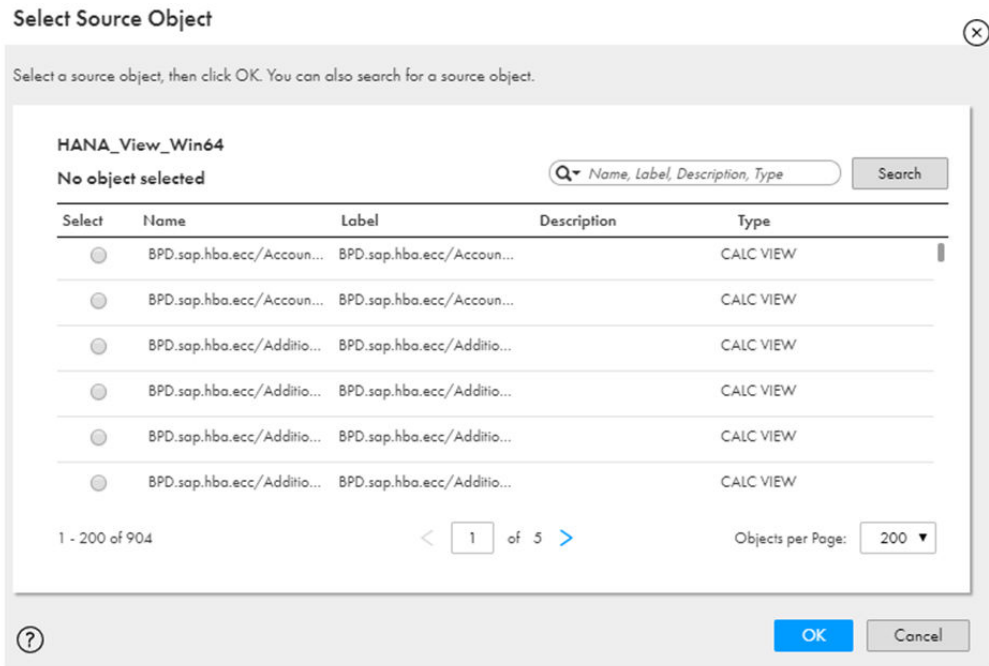

The SAP HANA database modelling views for the source object that you created are displayed under the **Type** column. An analytical view is displayed as **OLAP VIEW**, an attribute view is displayed as **JOIN VIEW**, and a calculation view is displayed as **CALC VIEW**.

9. Click **OK**.
10. Add objects to the mapping as needed.
11. Save and run the mapping.

CHAPTER 5

SAP HANA pushdown optimization

This chapter includes the following topics:

- [SAP HANA Pushdown optimization overview, 18](#)
- [Configuring optimization for an SAP HANA mapping task, 18](#)
- [Pushdown optimization supported operations, functions, operators, and transformations, 19](#)

SAP HANA Pushdown optimization overview

You can configure pushdown optimization for an SAP HANA task to push the transformation logic to the source or target SAP HANA database. Pushdown optimization enhances the mapping performance.

You can enable full or source pushdown optimization in an SAP HANA task that uses an SAP HANA connection in the mapping.

The amount of transformation logic that you can push to the database depends on the database, transformation logic, and task configuration. The task processes all transformation logic that it cannot push to the database.

Configuring optimization for an SAP HANA mapping task

Perform the following steps to configure pushdown optimization for an SAP HANA mapping task:

1. Create an SAP HANA connection.
2. Create a mapping to read data from an SAP HANA source and write data to an SAP HANA target.
3. Create a mapping task.
 - a. Select the configured mapping.
 - b. On the **Schedule** tab, in the **Pushdown Optimization** section, set the pushdown optimization value to **Full** or **Source**.

- c. Save the task and click **Finish**.

When you run the mapping task, the transformation logic is pushed to the SAP HANA database.

Pushdown optimization supported operations, functions, operators, and transformations

The following table lists the supported operations:

Operation	Pushdown
Read	Yes
Write	Only the Insert operation is supported.

The following table summarizes the availability of pushdown functions in an SAP HANA database. Columns marked with an X indicate that the function can be pushed to the SAP HANA database by using full or source pushdown optimization. Columns marked with a dash (-) symbol indicate that the function cannot be pushed to the database.

Function	Pushdown	Function	Pushdown	Function	Pushdown
ABS()	X	INSTR()	X	SQRT()	X
AVG()	X	ISNULL()	X	STDDEV()	X
CHR()	X	LEAST()	-	SUM()	X
CONCAT()	X	LOG()	X	SYSDATE()	X
COS()	X	LOOKUP()	X	SYSTIMESTAMP ()	X
COUNT()	X	LOWER()	X	TAN()	X
DATE_COMPARE() E()	X	MAX()	X	TO_BIGINT	X
DATE_DIFF()	X	MIN()	X	TO_DECIMAL()	X
DATE_GET_PART() T()	X	POWER()	X	TO_FLOAT()	X
DECODE()	X	ROUND()	X	TO_INTEGER()	X
EXP()	X	SIN()	X	TRUNC()	X

Function	Pushdown	Function	Pushdown	Function	Pushdown
GREATEST()	-	SINH()	X	UPPER()	X
IIF()	X	SOUNDEX()	X	VARIANCE()	X

The following table lists the pushdown operators that can be used in an SAP HANA database. Columns marked with an X indicate that the operator can be pushed to the SAP HANA database by using full pushdown optimization.

Operator	Pushdown
+	X
-	X
*	X
/	X
%	X
	X
>	X
<	X
=	X
>=	X
<=	X
!=	X
AND	X
OR	X
NOT	X
^=	-

The following table lists the transformation logic that is supported by pushdown optimization:

Transformations	Pushdown
Aggregator	X
Expression	X
Filter	X

Transformations	Pushdown
Joiner	X
Lookup	X
Router	X
Sorter	X
Union	X

CHAPTER 6

Data type reference

This chapter includes the following topics:

- [Data type reference overview, 22](#)
- [SAP HANA and transformation data types, 22](#)

Data type reference overview

Data Integration uses the following data types in mappings and mapping tasks with SAP HANA:

SAP HANA native data types

SAP HANA data types appear in the source transformation when you choose to edit metadata for the fields.

Transformation data types

Set of data types that appear in the transformations. They are internal data types based on ANSI SQL-92 generic data types, which the Secure Agent uses to move data across platforms. Transformation data types appear in all transformations in a mapping.

When Data Integration reads source data, it converts the native data types to the comparable transformation data types before transforming the data.

SAP HANA and transformation data types

SAP HANA data types map to transformation data types that the Secure Agent uses to move data across platforms.

The following table compares SAP HANA data types and transformation data types:

SAP HANA Datatype	Range	Transformation Datatype	Range
Alphanum	Precision 1 to 127	Nstring	1 to 104,857,600 characters
Bigint	-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807	Bigint	-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807 Precision 19, scale 0

SAP HANA Datatype	Range	Transformation Datatype	Range
Binary	Used to store bytes of binary data	Binary	1 to 104,857,600 bytes
Bintext	-	String	Precision 32000
Blob	Up to 2 GB	Binary	1 to 104,857,600 bytes
Boolean	True/False	Integer	Boolean (True/False) values, precision 10
Clob	Up to 2 GB	String	1 to 104,857,600 characters
Date	Jan 1, 0001 A.D. to Dec 31, 9999 A.D. Precision 10, scale 0	Date/Time	Jan 1, 0001 A.D. to Dec 31, 9999 A.D. (precision to the nanosecond)
Decimal (precision, scale) or Dec (p, s)	Precision 1 to 34	Decimal	Precision 1 to 28, scale 0 to 28 For transformations that support precision up to 38 digits, the precision is 1 to 38 digits, and the scale is 0 to 38. For transformations that support precision up to 28 digits, the precision is 1 to 28 digits, and the scale is 0 to 28. If you specify the precision greater than the maximum number of digits, the Secure Agent converts decimal values to double in high precision mode.
Double	Specifies a single-precision 64-bit floating-point number	Double	Precision 15
Float	Precision 1 to 53	Double	Precision 15
Integer	-2,147,483,648 to 2,147,483,647	Integer	-2,147,483,648 to 2,147,483,647 Precision 10, scale 0
NClob	Up to 2 GB	String	1 to 104,857,600 characters
Nvarchar	Precision 1 to 5000	String	1 to 104,857,600 characters
Real	Specifies a single-precision 32-bit floating-point number	Double	Precision 7, scale 0
Seconddate	0001-01-01 00:00:01 to 9999-12-31 24:00:00	Date/Time	Jan 1, 0001 A.D. to Dec 31, 9999 A.D. (precision to the nanosecond)
Shorttext	Specifies a variable-length character string, which supports text search and string search features	String	1 to 104,857,600 characters
Smalldecimal	Precision 1 to 16	Decimal	Precision 1 to 28, scale 0 to 28

SAP HANA Datatype	Range	Transformation Datatype	Range
Smallint	-32,768 to 32,767	Integer	Precision 5, scale 0
Text	Specifies a variable-length character string, which supports text search features	String	1 to 104,857,600 characters
Time	24-hour time period	Date/Time	Jan 1, 0001 A.D. to Dec 31, 9999 A.D. (precision to the nanosecond)
Timestamp	0001-01-01 00:00:00.0000000 to 9999-12-31 23:59:59.9999999	Date/Time	Jan 1, 0001 A.D. to Dec 31, 9999 A.D. (precision to the nanosecond)
Tinyint	0 to 255	Integer	Precision 5, scale 0
Varchar	Precision 1 to 5000	String	1 to 104,857,600 characters
Varbinary	1 to 5000 bytes	Binary	1 to 104,857,600 bytes

INDEX

C

Cloud Application Integration community
URL [5](#)
Cloud Developer community
URL [5](#)
connections
SAP HANA [10](#)

D

Data Integration community
URL [5](#)

I

Informatica Global Customer Support
contact information [6](#)
Informatica Intelligent Cloud Services
web site [5](#)

J

JDBC
connection properties [10](#)

M

maintenance outages [6](#)
mappings
rules and guidelines [16](#)

P

pushdown optimization
functions [19](#)
transformations [19](#)

S

SAP HANA
pushdown optimization overview [18](#)
SAP HANA connection
configuration [18](#)
status
Informatica Intelligent Cloud Services [6](#)
system status [6](#)

T

trust site
description [6](#)

U

upgrade notifications [6](#)

W

web site [5](#)