



Informatica™

Informatica® B2B Data Exchange  
10.2

# Installation and Configuration Guide

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, the Informatica logo, PowerCenter, and PowerExchange are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at <https://www.informatica.com/trademarks.html>. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

See patents at <https://www.informatica.com/legal/patents.html>.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

#### NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at [infa\\_documentation@informatica.com](mailto:infa_documentation@informatica.com).

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2019-10-10

# Table of Contents

<b>Preface</b> .....	<b>8</b>
Informatica Resources. ....	8
Informatica Network. ....	8
Informatica Knowledge Base. ....	8
Informatica Documentation. ....	8
Informatica Product Availability Matrixes. ....	9
Informatica Velocity. ....	9
Informatica Marketplace. ....	9
Informatica Global Customer Support. ....	9
<b>Chapter 1: Installation Overview</b> .....	<b>10</b>
B2B Data Exchange Installation. ....	10
Additional Installation Components. ....	11
<b>Chapter 2: Before You Begin</b> .....	<b>13</b>
User Accounts. ....	13
Port Numbers. ....	15
<b>Chapter 3: Pre-Installation Tasks</b> .....	<b>16</b>
Pre-Installation Tasks Overview. ....	16
Verify the Minimum System Requirements. ....	17
Verify the Database Requirements. ....	18
Install the Prerequisite Software. ....	19
Install and Configure the PowerCenter pmrep Command Line Utility. ....	20
Configure Environment Variables. ....	20
Set Up a Directory for the Document Store. ....	20
Configure Access to the Data Transformation Service. ....	21
Configure Microsoft SQL Server Database. ....	21
Opening Ports to the Partners Portal. ....	21
<b>Chapter 4: B2B Data Exchange Installation</b> .....	<b>22</b>
Installing B2B Data Exchange on a Windows Operating System. ....	22
Step 1. Run the Installer. ....	22
Step 2. Define Installation Settings. ....	24
Step 3. Configure the B2B Data Exchange Repository Repositories. ....	26
Step 4. Set Up the Operational Data Store. ....	31
Step 5. Configure User Authentication. ....	34
Step 6. Configure Document Store and Web Server Configure Document Store, Web Server, and Port Numbers. ....	42
Step 7. Configure PowerCenter Settings. ....	47

Step 8. Configure Informatica Data Quality Settings. . . . .	54
Step 89. Complete the Installation. . . . .	56
Installing B2B Data Exchange on a UNIX Operating System. . . . .	57
Step 1. Run the Installer. . . . .	57
Step 2. Define Installation Settings. . . . .	57
Step 3. Configure B2B Data Exchange Repository Repositories. . . . .	58
Step 4. Set Up the Operational Data Store. . . . .	60
Step 5. Configure User Authentication. . . . .	61
Step 6. Configure Document Store and Web Server Configure Document Store, Web Server, and Port Numbers. . . . .	63
Step 7. Configure PowerCenter Settings. . . . .	65
Step 8. Complete the Installation. . . . .	66
Step 8. Configure Processing Engine Settings. . . . .	66
Step 9. Complete the Installation. . . . .	67

## **Chapter 5: Post-Installation Tasks..... 68**

Post-Installation Tasks Overview. . . . .	68
Configure Authentication for the Operation Console. . . . .	69
Configure a JAAS Module for the Operation Console. . . . .	70
Register the B2B Data Exchange Server Plug-in for PowerCenter. . . . .	70
Connect to a Remote Informatica Domain. . . . .	71
Modify the B2B Data Exchange Host Name. . . . .	71
Configuring a PowerCenter Integration Service to Access B2B Data Exchange. . . . .	72
Configure Remote Access to B2B Data Exchange. . . . .	72
Set Up the Run Publication SubscriptionB2B Data Exchange Web Services . . . . .	73
Importing the Web Services to PowerCenter. . . . .	73
Verifying the Server Settings. . . . .	74
Configure Credentials for Windows Authentication. . . . .	74
Set Up Database Partitions on the Publication Repository. . . . .	75
Configuring the Environment for a Hadoop Publication Repository. . . . .	75
Log in to the Operation Console. . . . .	77
Configure Connections to the B2B Data Exchange Repositories. . . . .	78
Configure the Mail Server. . . . .	79
Synchronize B2B Data Exchange Users. . . . .	80
Activate the Dashboard and Reports Component. . . . .	80
Register the Dashboard and Reports License. . . . .	80
Import the Operational Data Store Event Loader Workflow to PowerCenter. . . . .	81
Synchronize B2B Data Exchange Users. . . . .	82
Customize the Partners Portal Logo. . . . .	82

## **Chapter 6: Installing the Partners Portal on Non-B2B Data Exchange Nodes.. 83**

Installing the Partners Portal on Non-B2B Data Exchange Nodes Overview. . . . .	83
Verify the Minimum System Requirements. . . . .	83

Installation Process . . . . .	84
Installing the Partners Portal on Non-B2B Data Exchange Nodes Requirements. . . . .	84
Step 1. Install the Partners Portal . . . . .	85
Installing the Partners Portal on Windows in Graphical Mode. . . . .	85
Installing the Partners Portal on UNIX in Console Mode. . . . .	90
Step 2. Configure the Partners Portal Logo. . . . .	92
Step 3. Set the Dashboard Properties. . . . .	93
<b>Chapter 7: Upgrading B2B Data Exchange . . . . .</b>	<b>94</b>
Upgrading B2B Data Exchange Overview. . . . .	94
Before You Upgrade. . . . .	95
Opening Ports to the Partners Portal. . . . .	96
Upgrading B2B Data Exchange on a Windows Operating System. . . . .	96
Step 1. Run the Installer. . . . .	96
Step 2. Define Installation Settings. . . . .	98
Step 3. Configure B2B Data Exchange Repositories Repository. . . . .	100
Step 4. Set Up the Operational Data Store. . . . .	106
Step 5. Configure the Web Server Configure Web Server and Port Numbers. . . . .	109
Step 6. Configure PowerCenter Settings. . . . .	111
Step 7. Configure Data Quality Settings. . . . .	115
Step 7.8. Complete the Installation. . . . .	117
Upgrading B2B Data Exchange on a UNIX Operating System. . . . .	118
Step 1. Run the Installer. . . . .	118
Step 2. Define Installation Settings. . . . .	118
Step 3. Configure B2B Data Exchange Repository Repositories. . . . .	119
Step 4. Set Up the Operational Data Store. . . . .	121
Step 5. Configure the Web Server Configure the Web Server and Port Numbers. . . . .	122
Step 6. Configure PowerCenter Settings. . . . .	123
Step 7. Complete the Installation. . . . .	125
Step 7. Configure Processing Engine Settings. . . . .	125
Step 8. Complete the Installation. . . . .	126
After You Upgrade. . . . .	126
Reapplying Configuration Modifications. . . . .	128
Registering the Dashboard and Reports License. . . . .	128
Replacing the Operational Data Store Loader Workflow. . . . .	128
Configure Credentials for Windows Authentication. . . . .	129
Updating the Security Configuration Files . . . . .	129
Updating the Run Publication Subscription Web Service API. . . . .	130
Restart the B2B Data Exchange Services . . . . .	130
Creating a Portal User Group. . . . .	130
Assigning a Portal User to a Portal User Group. . . . .	131
Customize the Partners Portal Logo. . . . .	131
Configure Data Archive. . . . .	131

Updating the B2B Data Exchange Custom Workflows in PowerCenter. . . . .	132
Updating Entities Managed by B2B Data Exchange in PowerCenter. . . . .	133
Updating Custom Workflows for Events View Enhancements. . . . .	133
Register the OEM Managed File Transfer License. . . . .	133
Configuring User Name and Password for the OEM Managed File Transfer. . . . .	134
<b>Chapter 8: Starting and Stopping B2B Data Exchange. . . . .</b>	<b>136</b>
Overview of Starting and Stopping B2B Data Exchange. . . . .	136
Starting and Stopping B2B Data Exchange on Windows. . . . .	136
Starting and Stopping B2B Data Exchange from the Start Menu. . . . .	136
Starting and Stopping B2B Data Exchange with Batch Scripts. . . . .	137
Starting and Stopping B2B Data Exchange on UNIX. . . . .	137
<b>Chapter 9: Optional B2B Data Exchange Configuration. . . . .</b>	<b>138</b>
Optional B2B Data Exchange Configuration Overview. . . . .	138
Modifying Port Numbers. . . . .	139
Modifying the B2B Data Exchange Server Startup and Shutdown Port Number. . . . .	140
Modifying the B2B Data Exchange Server RMI Port Number. . . . .	140
Modifying the JNDI Provider Port Number. . . . .	141
Modifying the B2B Data Exchange Server RMI Port Number. . . . .	142
Logs. . . . .	142
Default Log Files. . . . .	143
Customizing the Destination for Log Messages. . . . .	143
Changing the Maximum Java Heap Size. . . . .	146
Changing the Credentials for a Database User Account. . . . .	147
Changing the Credentials for the Data Integration Hub Hadoop Service. . . . .	149
Updating the Dashboard Configuration File. . . . .	150
Configuring the pmrep Process Pool. . . . .	150
Configuring a PowerCenter Integration Service to Access B2B Data Exchange. . . . .	151
Configuring Repository Connections on PowerCenter Version 10. . . . .	151
Configuring the B2B Data Exchange JMS Broker. . . . .	152
Activating the ActiveMQ Web Console. . . . .	152
Configure System Properties to Enable Informatica Managed File Transfer Access. . . . .	153
Installing a Single Sign On Key . . . . .	153
Sharing Informatica Managed File Transfer Directories with B2B Data Exchange. . . . .	154
Adding Variables to Custom Informatica Managed File Transfer Projects. . . . .	155
<b>Chapter 10: Installing and Configuring the B2B Data Exchange Accelerator for Data Archive. . . . .</b>	<b>156</b>
Installing and Configuring B2B Data Exchange Accelerator for Data Archive Overview. . . . .	156
Pre-Installation Steps. . . . .	157
Database User Privileges. . . . .	158
Installing the B2B Data Exchange Accelerator for Data Archive. . . . .	159

Configuring the Data Archive Source Connection from Production Database to History Database	160
Source and Target Connections. . . . .	161
Configuring the Data Archive Source Connection from Production Database to History Database. . . . .	161
Configuring a Source Connection from History Database to Data Archive. . . . .	162
Configuring a Source Connection from Production Database to File Archive. . . . .	162
Configuring a Target Connection from Production Database to History Database. . . . .	163
Configuring a Target Connection from History Database to File Archive. . . . .	163
Configuring a Target Connection from Production Database to File Archive. . . . .	163
Securing Data Archive Connections. . . . .	164
Configuring and Assigning the B2B Data Exchange and FAS Access Roles. . . . .	164
Assign a Connection to a Security Group. . . . .	165
Creating the History Database Tables and Indexes. . . . .	165
Create the Seamless Access Layer for the History Database. . . . .	166
Creating a File Archive User. . . . .	166
Creating a File Archive Folder. . . . .	167
Creating an Archive Job. . . . .	167
Archive Job Parameters. . . . .	168
Scheduling Archive Jobs. . . . .	169
Scheduling Archiving from the Production Database to History Database . . . . .	169
Archiving from a Database to the File Archive. . . . .	169
Scheduling Archiving from a Database to the File Archive. . . . .	170
Viewing Archived Events. . . . .	170
Configuring B2B Data Exchange System Properties. . . . .	171
Viewing Archived Events in the B2B Data Exchange Operations Console. . . . .	171
Browsing Data with the Data Discovery Portal. . . . .	172
Defining Search Options to Search the File Archive with the Data Discovery Portal. . . . .	172
Searching the File Archive with the Data Discovery Portal. . . . .	173
Configuring and Assigning the By-Reference Access Role. . . . .	173
Viewing Archived By-Reference Documents. . . . .	174
Limitations. . . . .	174
<b>Chapter 11: Uninstallation. . . . .</b>	<b>176</b>
Uninstallation Overview. . . . .	176
Uninstalling B2B Data Exchange from Windows Operating Systems. . . . .	176
Uninstalling B2B Data Exchange from UNIX Operating Systems. . . . .	177
<b>Index. . . . .</b>	<b>178</b>

# Preface

The *B2B Data Exchange Installation and Configuration Guide* provides the steps required to install and configure B2B Data Exchange. This guide assumes that you have a working knowledge of the operating system you are installing on and the software required to run B2B Data Exchange.

## Informatica Resources

### Informatica Network

Informatica Network hosts Informatica Global Customer Support, the Informatica Knowledge Base, and other product resources. To access Informatica Network, visit <https://network.informatica.com>.

As a member, you can:

- Access all of your Informatica resources in one place.
- Search the Knowledge Base for product resources, including documentation, FAQs, and best practices.
- View product availability information.
- Review your support cases.
- Find your local Informatica User Group Network and collaborate with your peers.

### Informatica Knowledge Base

Use the Informatica Knowledge Base to search Informatica Network for product resources such as documentation, how-to articles, best practices, and PAMs.

To access the Knowledge Base, visit <https://kb.informatica.com>. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at [KB\\_Feedback@informatica.com](mailto:KB_Feedback@informatica.com).

### Informatica Documentation

To get the latest documentation for your product, browse the Informatica Knowledge Base at [https://kb.informatica.com/\\_layouts/ProductDocumentation/Page/ProductDocumentSearch.aspx](https://kb.informatica.com/_layouts/ProductDocumentation/Page/ProductDocumentSearch.aspx).

If you have questions, comments, or ideas about this documentation, contact the Informatica Documentation team through email at [infa\\_documentation@informatica.com](mailto:infa_documentation@informatica.com).



## Informatica Product Availability Matrixes

Product Availability Matrixes (PAMs) indicate the versions of operating systems, databases, and other types of data sources and targets that a product release supports. If you are an Informatica Network member, you can access PAMs at

<https://network.informatica.com/community/informatica-network/product-availability-matrixes>.

## Informatica Velocity

Informatica Velocity is a collection of tips and best practices developed by Informatica Professional Services. Developed from the real-world experience of hundreds of data management projects, Informatica Velocity represents the collective knowledge of our consultants who have worked with organizations from around the world to plan, develop, deploy, and maintain successful data management solutions.

If you are an Informatica Network member, you can access Informatica Velocity resources at <http://velocity.informatica.com>.

If you have questions, comments, or ideas about Informatica Velocity, contact Informatica Professional Services at [ips@informatica.com](mailto:ips@informatica.com).

## Informatica Marketplace

The Informatica Marketplace is a forum where you can find solutions that augment, extend, or enhance your Informatica implementations. By leveraging any of the hundreds of solutions from Informatica developers and partners, you can improve your productivity and speed up time to implementation on your projects. You can access Informatica Marketplace at <https://marketplace.informatica.com>.

## Informatica Global Customer Support

You can contact a Global Support Center by telephone or through Online Support on Informatica Network.

To find your local Informatica Global Customer Support telephone number, visit the Informatica website at the following link:

<http://www.informatica.com/us/services-and-training/support-services/global-support-centers>.

If you are an Informatica Network member, you can use Online Support at <http://network.informatica.com>.

# CHAPTER 1

## Installation Overview

This chapter includes the following topics:

- [B2B Data Exchange Installation, 10](#)
- [Additional Installation Components, 11](#)

## B2B Data Exchange Installation

B2B Data Exchange consists of the core application component and additional required and optional components. If you install B2B Data Exchange, PowerCenter services, and the PowerCenter Client on the same machine, you can select all of the components in the installer. Otherwise, install each component on the required machine.

The B2B Data Exchange installation includes the following components:

### **B2B Data Exchange**

Core application component. Includes the Operation Console, B2B Data Exchange server, and the B2B Data Exchange repository, and the publication repository. The PowerCenter services must be running when you install B2B Data Exchange. You must set up the database user accounts before you install this component.

If you install B2B Data Exchange on an existing database, all data in the repository is preserved. All previous user accounts are still valid in the new installation, including the Operation Console administrator account. If the repository is from a previous version, the installer upgrades the repository.

### **B2B Data Exchange Partners Portal**

On-premises Partners Portal component. The portal displays visual reports about data that B2B Data Exchange processes for partners. You can brand the portal with your organization logo.

You can install the Partners Portal either on the B2B Data Exchange node or on a different node in your organization.

### **B2B Data Exchange Dashboard and Reports**

Business activity monitoring component. Includes the dashboard application and the operational data store repository. You must set up a different user account from the user account that you use for the B2B Data Exchange repository.

You must install the B2B Data Exchange component to install this component.

### **B2B Data Exchange PowerCenter server plug-in**

PowerCenter repository plug-in that B2B Data Exchange uses to run B2B Data Exchange transformations in PowerCenter. The installation includes files to add to the classpath of the PowerCenter Integration

Service, and sample workflows. You must install this plug-in on the same machine as the PowerCenter services.

After you install this component, you must register the plug-in to the PowerCenter repository before you create and run B2B Data Exchange workflows.

**Note:** B2B Data Exchange does not support versioned PowerCenter repositories.

#### **B2B Data Exchange PowerCenter Client plug-in**

PowerCenter Client plug-in that displays B2B Data Exchange transformation properties in PowerCenter mappings. You install this plug-in on all PowerCenter Client machines that you plan to use to build mappings and workflows for B2B Data Exchange transformations.

#### **B2B Managed File Transfer**

Managed File Transfer tool to use when you process files to and from partners with specific transfer protocols, such as FTP or AS2.

You must install the B2B Data Exchange component to install this component.

#### **B2B Data Exchange Hadoop Service**

Available when you install B2B Data Exchange on a UNIX operating system.

Connecting module between B2B Data Exchange and the Hadoop cluster. Enables B2B Data Exchange to perform operations on the Hadoop publication repository.

Select this component if you want to define a Hadoop-based publication repository and manage some of your topics on Hadoop.

**Note:** The B2B Data Exchange Hadoop Service must be installed on an edge node in the Hadoop cluster. Unless you are installing B2B Data Exchange on a Hadoop edge node, do not select this component during B2B Data Exchange installation. In this case, after you complete the B2B Data Exchange installation, run the installation again on the edge node and select to install only the B2B Data Exchange Hadoop Service component on the node.

#### **B2B Data Exchange Big Data Management**

Enables B2B Data Exchange to use Big Data Management mappings for custom publications and subscriptions that publish and subscribe to a Hadoop-based publication repository.

Available when you install B2B Data Exchange on a UNIX operating system.

#### **B2B Data Exchange Informatica Data Quality**

Enables B2B Data Exchange to use Data Quality mappings for custom publications and subscriptions from and to on-premises applications.

## Additional Installation Components

B2B Data Exchange requires additional components to run. The components are installed as part of the B2B Data Exchange installation process.

The B2B Data Exchange includes the following additional applications and components:

#### **B2B Data Exchange Server**

Server environment that manages event processing publication and subscription processing in B2B Data Exchange.

**JMS Broker Service**

Manages JMS messages routing between B2B Data Exchange and PowerCenter.

**Note:** If you upgrade from earlier versions, backwards compatibility is not guaranteed.

**Operation Console**

Web interface to customize and monitor processing, manage users, and set preferences.

**Apache Tomcat**

Web server environment that runs the Operation Console client.

**Java JDK**

Java run-time environment in which the B2B Data Exchange server, B2B Data Exchange Operation Console, and B2B Data Exchange command line client tools run.

**Samples**

Sample workflows and readme files. The installer copies the samples to the following directory:

`<DXInstallationDir>/samples`

For more information about the sample workflows, read the `readmefirst.txt` file in the folder of each sample.

# CHAPTER 2

## Before You Begin

This chapter includes the following topics:

- [User Accounts, 13](#)
- [Port Numbers, 15](#)

### User Accounts

Before you install, verify that you have the user names and passwords for the required database and domain accounts.

The following table describes the required user accounts:

User Account	Description
Database	<p>Database user account that you use to log in to the database server and create tables and views for the B2B Data Exchange repository and the publication repository. If you install the Dashboard and Reports component, you also use a user account for the operational data store.</p> <p>You must install all the repositories on the same type of database server. You must create a separate user account for each repository.</p> <p>The user accounts must have privileges to perform the following actions:</p> <ul style="list-style-type: none"><li>- Select data from tables and views.</li><li>- Insert data into tables, delete data from tables, and update data in tables.</li><li>- Create, change, and delete the following elements:<ul style="list-style-type: none"><li>- Tables</li><li>- Views</li><li>- Synonyms</li><li>- Indexes</li><li>- Custom data types</li><li>- Triggers</li></ul></li><li>- Create, change, delete, and run stored procedures and functions.</li></ul> <p>If you use a Microsoft SQL Server database, you must set up separate databases for each repository. It is recommended that you grant database owner privileges to the user accounts.</p>
If you use B2B Data Exchange with Informatica domain authentication: Informatica domain administrator	Administrator account for the Informatica domain.

User Account	Description
If you use B2B Data Exchange with Informatica domain authentication: Informatica security domain	User account for Informatica domain authentication. The user account must be created in the Informatica Administrator tool with the <b>manage roles/groups/users</b> privileges. The B2B Data Exchange administrator synchronizes the user account after the installation.
PowerCenter Repository Service	<p>User account that B2B Data Exchange uses to perform operations in the PowerCenter Repository Service. The user accounts must have privileges and permissions to perform the following actions:</p> <p><b>General</b></p> <ul style="list-style-type: none"> <li>- Access Repository Manager privilege</li> </ul> <p><b>Folders</b></p> <ul style="list-style-type: none"> <li>- Read on folder permission</li> <li>- Create privilege</li> <li>- Copy privilege</li> </ul> <p><b>Design Objects</b></p> <ul style="list-style-type: none"> <li>- Read on folder permission</li> <li>- Read on shared folder permission</li> <li>- Read and Write on destination folder permission</li> <li>- Create, Edit, and Delete privilege with the Read on original folder, Read and Write on destination folder, and Read and Write on folder permissions</li> </ul> <p><b>Sources and Targets</b></p> <ul style="list-style-type: none"> <li>- Read on folder permission</li> <li>- Read on shared folder permission</li> <li>- Read and Write on destination folder permission</li> <li>- Create, Edit, and Delete privilege with the Read on original folder, Read and Write on destination folder, and Read and Write on folder permissions</li> </ul> <p><b>Run-time Objects</b></p> <ul style="list-style-type: none"> <li>- Read on folder permission</li> <li>- Create, Edit, and Delete privilege with the Read on original folder, Read and Write on destination folder, Read on connection object, and Read and Write on folder permissions</li> <li>- Monitor privilege with the Read on folder permission</li> <li>- Execute privilege with the Read and Execute on folder permission</li> </ul> <p><b>Global Objects</b></p> <ul style="list-style-type: none"> <li>- Read on connection object permission</li> <li>- Read and Write on connection object</li> <li>- Create Connections privilege</li> <li>- Execute privilege with the Read and Execute on folder permission</li> </ul>

# Port Numbers

The installer sets the default port numbers for the installation components. If another application uses the same port number as one of the installation components, a port conflict might prevent the component from running correctly or cause errors.

You can change the port numbers after installation. Before you start B2B Data Exchange, verify that the port numbers do not conflict with other applications and change the port numbers in B2B Data Exchange to prevent port conflicts.

The following table describes the default port numbers:

Port Number	Description
18000	UDP multicast port that B2B Data Exchange uses for internal communications.
18005	Operation Console shutdown port. Only required to be available on the machine where B2B Data Exchange is installed.
18050	Port that the Operation Console uses for internal communications.
18080	Operation Console HTTP port. Required only if you use an HTTP port for the Operation Console.
18095	RMI port for B2B Data Exchange server startup and shutdown.
18095 and 10896	RMI ports that the Operation Console and PowerCenter workflows use to communicate with the B2B Data Exchange server.
18100	Port that the B2B Data Exchange server uses for internal communications.
18443	Operation Console HTTPS port. Required only if you use an HTTPS port for the Operation Console.
18616	Port for the B2B Data Exchange JNDI provider. This port is also the JMS listener port for the B2B Data Exchange JMS Broker.

# CHAPTER 3

## Pre-Installation Tasks

This chapter includes the following topics:

- [Pre-Installation Tasks Overview, 16](#)
- [Verify the Minimum System Requirements, 17](#)
- [Verify the Database Requirements, 18](#)
- [Install the Prerequisite Software, 19](#)
- [Install and Configure the PowerCenter pmrep Command Line Utility, 20](#)
- [Configure Environment Variables, 20](#)
- [Set Up a Directory for the Document Store, 20](#)
- [Configure Access to the Data Transformation Service, 21](#)
- [Configure Microsoft SQL Server Database, 21](#)
- [Opening Ports to the Partners Portal, 21](#)

## Pre-Installation Tasks Overview

Before you install B2B Data Exchange, set up the machines to meet the installation requirements, verify that you have all the user account credentials, and prepare your environment for installing and running B2B Data Exchange.

**Note:** B2B Data Exchange and the PowerCenter Integration Service that B2B Data Exchange uses must be installed on the same type of operating system. Both must be installed either on a machine or machines that are running Windows operating systems, or on a machine or machines that are running non-Windows operating systems.

The following components must reside on machines with the same locale and the same time zone:

- B2B Data Exchange server
- B2B Data Exchange repositories
- B2B Data Exchange Operation Console clients
- PowerCenter Repository Service that B2B Data Exchange uses
- PowerCenter Integration Service that B2B Data Exchange uses



# Verify the Minimum System Requirements

Verify that your system meets the minimum requirements.

The following table describes the minimum system requirements:

System	Requirement
Operating system	<ul style="list-style-type: none"><li>- Microsoft Windows</li><li>- IBM AIX</li><li>- Sun Solaris</li><li>- Red Hat Linux</li><li>- SUSE Linux</li></ul>
Processor	<ul style="list-style-type: none"><li>- Minimum: 2 CPU cores</li><li>- Recommended: 4 CPU cores</li><li>- Recommended: 8 CPU cores</li></ul>
RAM	8 GB
Disk space	<ul style="list-style-type: none"><li>- Minimum: 3 GB</li><li>- Recommended: 8 GB</li></ul>
Browser	<ul style="list-style-type: none"><li>- Microsoft Internet Explorer</li><li>- Google Chrome</li></ul>

The following table describes the minimum system requirements to run the installer:

System	Requirement
RAM	512 MB
Disk space	1 GB

For more information about product requirements and supported platforms, see the Product Availability Matrix on Informatica Network:

<https://network.informatica.com/community/informatica-network/product-availability-matrices/overview>

# Verify the Database Requirements

Verify that your database meets the requirements for running B2B Data Exchange.

The following table describes the database requirements for B2B Data Exchange:

Database Component	Description
Database System	<p>Type of database on which to install the repositories. You can use one of the following database systems:</p> <ul style="list-style-type: none"> <li>- Oracle</li> <li>- Microsoft SQL Server</li> </ul> <p>If you install the Dashboard and Reports component, you do not need to install the operational data store on the same machine on which you install B2B Data Exchange.</p> <p><b>Note:</b> If you install the Dashboard and Reports component, your B2B Data Exchange and operational data store repositories are installed on Microsoft SQL Servers, and you use PowerCenter version 10, you must configure the repository connections in PowerCenter Workflow Manager. For details, see <a href="#">"Configuring Repository Connections on PowerCenter Version 10" on page 151</a>.</p>
Database Instances	<p>Two database instances. B2B Data Exchange uses one database for the B2B Data Exchange repository and one database for the publication repository. Both database instances must be on the same type of database system. That is, both must be either Oracle databases or Microsoft SQL Server databases.</p> <p>If you use Oracle databases, it is recommended that each database has a unique user account and a unique schema.</p> <p>If you install the Dashboard and Reports component, an additional database instance is required for the operational data store. The operational data store must be on the same type of database system as the B2B Data Exchange repositories.</p> <p><b>Note:</b> If you install the Dashboard and Reports component, your B2B Data Exchange and operational data store repositories are installed on Microsoft SQL Servers, and you use PowerCenter version 10, you must configure the repository connections in PowerCenter Workflow Manager. For details, see <a href="#">"Configuring Repository Connections on PowerCenter Version 10" on page 151</a>.</p>
Disk space	<p>The B2B Data Exchange repository database requires at least 512 MB of disk space for the core application.</p> <p>You also need additional space on the publication repository database based on the number of messages that you need to process and the type of processing required publications and publication instances that you need to retain.</p> <p><b>Note:</b> Unicode data requires twice as much storage than single-byte character sets.</p> <p>The frequency of message archiving also affects the disk space requirement.</p>
Database connections	<p>One or more Multiple database connections for each repository must always be available.</p> <p>The number of required connections for each repository depends on the number of endpoints and the number of documents processed publications and subscriptions that run concurrently. Use the following formula to calculate the number of required database connections for each repository:</p> $(\text{NumberOfEndpoints} + \text{Maximum number of concurrent processes} + 3) \times \text{ConcurrentPublicationsOrSubscriptions} \times 3 + 2$ <p>If you do not have enough database connections available, B2B Data Exchange might fail or encounter database deadlocks.</p>

## Database Unicode Support

If you require Unicode support, create the B2B Data Exchange repository database and the B2B Data Exchange publication database with the following settings:

- Oracle databases: use the AL32UTF8 Unicode character set.

- Microsoft SQL Server: it is recommended that you use data types that support Unicode data: nchar, nvarchar, and ntext.

### Microsoft SQL Server Collation

If you use Microsoft SQL Server, the collation for the B2B Data Exchange repository and for the B2B Data Exchange publication repository must not be case sensitive.

## Install the Prerequisite Software

Install the prerequisite software on your machine.

- **PowerCenter.** Install PowerCenter before you install B2B Data Exchange. Make sure to install PowerCenter services on a machine that is accessible to B2B Data Exchange. After you install PowerCenter, verify that the PowerCenter Web Services Hub is running.  
If you do not install the PowerCenter services on the same machine that you install B2B Data Exchange, install the PowerCenter pmrep command line utility on the machine where you install B2B Data Exchange. Verify that B2B Data Exchange and PowerCenter can be accessed with the same drive and file path..  
If you do not install the PowerCenter services on the same machine that you install B2B Data Exchange, install the PowerCenter pmrep command line utility on the machine where you install B2B Data Exchange. Verify that B2B Data Exchange and PowerCenter can be accessed with the same drive and file path..  
**Note:** Verify that repository agent caching on the PowerCenter Repository Service is disabled. In Informatica Administrator, access the advanced properties of the Repository Service and verify that the option **Enable Rapagent caching** is cleared.
- **Data Transformation.** Install Data Transformation on the machine where you install B2B Data Exchange before you install the B2B Data Exchange server plug-in for PowerCenter.
- **Java Development Kit (JDK).** On IBM AIX operating systems, install IBM JDK and configure the INFA\_JDK\_HOME environment variable before you install B2B Data Exchange. Verify that the login shell can access the INFA\_JDK\_HOME environment variable. For more information about Java installation, see the Java website at the following address:  
<http://www.ibm.com/developerworks/java/jdk/aix/service.html#java7>  
The software available for download at the referenced links belongs to a third party or third parties, not Informatica LLC. The download links are subject to the possibility of errors, omissions or change. Informatica assumes no responsibility for such links and/or such software, disclaims all warranties, either express or implied, including but not limited to, implied warranties of merchantability, fitness for a particular purpose, title and non-infringement, and disclaims all liability relating thereto.  
For more information about product requirements and supported platforms, see the Product Availability Matrix on Informatica Network:  
<https://network.informatica.com/community/informatica-network/product-availability-matrices/overview>
- **Microsoft Visual C++ 2008 Redistributable Package (x86).** Install this package if you use the B2B Data Exchange PowerCenter Client plug-in on a Windows Server 2008 64-bit operating system.  
The software available for download at the referenced links belongs to a third party or third parties, not Informatica LLC. The download links are subject to the possibility of errors, omissions or change. Informatica assumes no responsibility for such links and/or such software, disclaims all warranties, either express or implied, including but not limited to, implied warranties of merchantability, fitness for a particular purpose, title and non-infringement, and disclaims all liability relating thereto.
- **Java Cryptography Extension (JCE).** Install this package if you are installing B2B Data Exchange with Managed File Transfer on an IBM AIX operating system.

# Install and Configure the PowerCenter pmrep Command Line Utility

If you do not install the PowerCenter services on the same machine that you install B2B Data Exchange, you install and configure the PowerCenter pmrep command line utility on the machine where you install B2B Data Exchange.

To download the utility, contact Informatica Shipping. The utility version must match the PowerCenter version.

1. Extract the ZIP file on your local machine to a directory that is accessible by the B2B Data Exchange installer.

By default, the installer searches for the utility in the following directory: `<LocalDrive>\Informatica\version`

2. Configure the utility settings based on your operating system.

For information about the utility settings, see the *Informatica Repository Guide*.

To test the utility settings, run the utility from the command line and verify that no errors appear in the run results.

**Note:** If you upgrade the pmrep command line utility at a later time, clean up all CNX files from the `Tmp` folder on your home directory.

## Configure Environment Variables

After you install PowerCenter or the PowerCenter pmrep command line utility on the machine where you install B2B Data Exchange, configure environment variables.

1. Set the `INFA_HOME` environment variable to point to the Informatica installation directory.
2. Set the `INFA_DOMAINS_FILE` environment variable to the path and the file name of the `domains.infa` file.
3. On Solaris and Linux, add `<INFA_HOME>/server/bin` to the `LD_LIBRARY_PATH` environment variable.
4. On AIX, add `<INFA_HOME>/server/bin` to the `LIBPATH` environment variable.
5. Verify that the pmrep utility code page matches the PowerCenter Repository Service code page. You specify the code page in the `INFA_CODEPAGE` environment variable of the utility.
6. To reduce the length of time to wait before the pmrep utility reports an error when connecting to PowerCenter, change the value of the `INFA_CLIENT_RESILIENCE_TIMEOUT` environment variable in the utility.

The default timeout waiting time is 180 seconds.

## Set Up a Directory for the Document Store

Set up a directory for the B2B Data Exchange document store.

The document store directory must be accessible to B2B Data Exchange, Apache Tomcat, Data Transformation, and PowerCenter with the same drive and file path.

# Configure Access to the Data Transformation Service

Configure the PowerCenter Integration Service to access the Data Transformation service.

When you run workflows for B2B Data Exchange that include an Unstructured Data transformation, the PowerCenter Integration Service must be able to access a Data Transformation service.

## Configure Microsoft SQL Server Database

If you use a Microsoft SQL Server database for the B2B Data Exchange repository, enable the `READ_COMMITTED_SNAPSHOT` database option. If you install the Dashboard and Reports component, enable this option on the operational data store as well.

**Note:** If you use Microsoft SQL Server 2012, you can set the option **Is read committed snapshot on** in Microsoft SQL Server Management Studio to **true** instead.

1. Open an SQL query for the database server with rights to set database options.
2. Run the following SQL statements:

```
ALTER DATABASE [<database_name>] SET SINGLE_USER WITH ROLLBACK IMMEDIATE
```

3. Run the following SQL query:

```
ALTER DATABASE <database_name> SET READ_COMMITTED_SNAPSHOT ON
```

4. To verify that this option is set, run the following SQL query:

```
SELECT is_read_committed_snapshot_on FROM sys.databases WHERE name =  
'<database_name>'
```

If the option is set, the query returns the value 1. If the option is not set, the query returns the value 0.

5. Run the following SQL statement to forcefully disconnect all users from the system:

```
ALTER DATABASE [<database_name>] SET MULTI_USER
```

## Opening Ports to the Partners Portal

If you want to install the Partners Portal, enable access to the portal in the firewall by opening the HTTP or HTTPS ports from the external network to the Portal server.

Configure the firewall to allow URLs that start with the suffix `/dx-portal` and `/dx-portal-help` only.

To ensure that outside access to the Partners Portal is securely performed, assign the external hostname URL for the portal to the **dx.portal.url** system property. For more information about configuring system properties in the B2B Data Exchange Operation Console, see the *B2B Data Exchange Administrator Guide*.

## CHAPTER 4

# B2B Data Exchange Installation

This chapter includes the following topics:

- [Installing B2B Data Exchange on a Windows Operating System, 22](#)
- [Installing B2B Data Exchange on a UNIX Operating System, 57](#)

## Installing B2B Data Exchange on a Windows Operating System

Install B2B Data Exchange on Windows operating systems in graphical mode. On UNIX operating systems, install B2B Data Exchange in console mode.



Before you install, verify that your environment meets the minimum system requirements, perform the pre-installation tasks, and verify that the PowerCenter services are running.

**Note:** During the installation, B2B Data Exchange saves log files in the home directory of the user in the subdirectory named `DXLogs`. If the installation does not complete successfully, you can view the log files in this location.

### Step 1. Run the Installer

1. Log in to the machine with the user account that you want to use to install B2B Data Exchange.  
To prevent permission errors, use the same account to install B2B Data Exchange and PowerCenter.
2. Close all other applications.
3. Run `Install.exe` from the root directory of the DVD or from the directory where you downloaded the installer.  
The **Introduction** page appears.
4. Read the instructions, and then click **Next**.

The **Install or Upgrade** page appears.

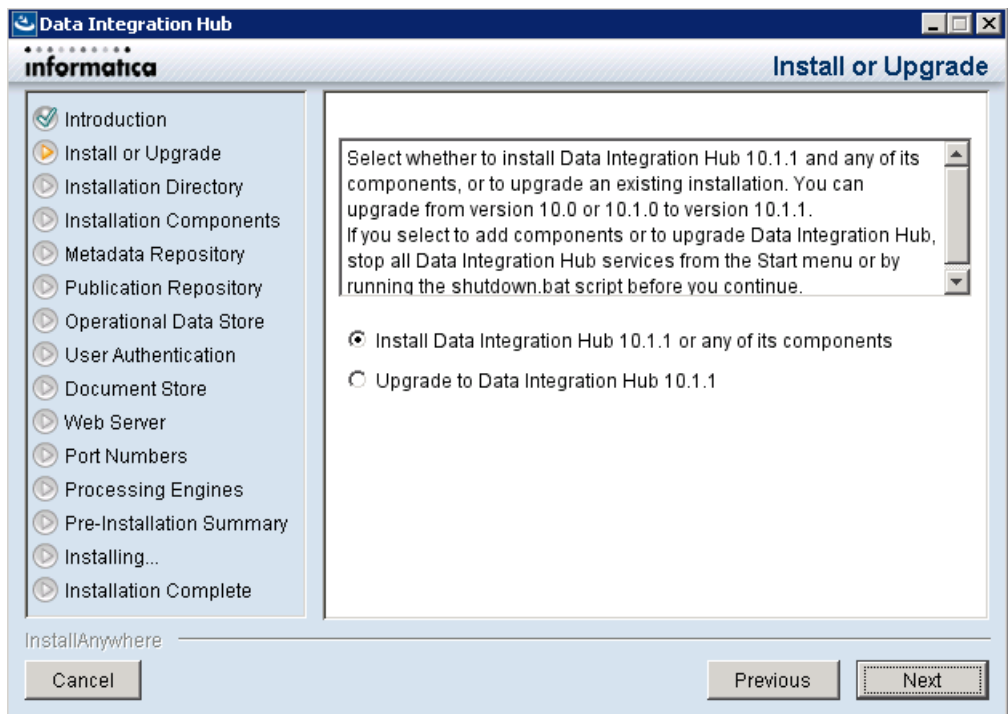
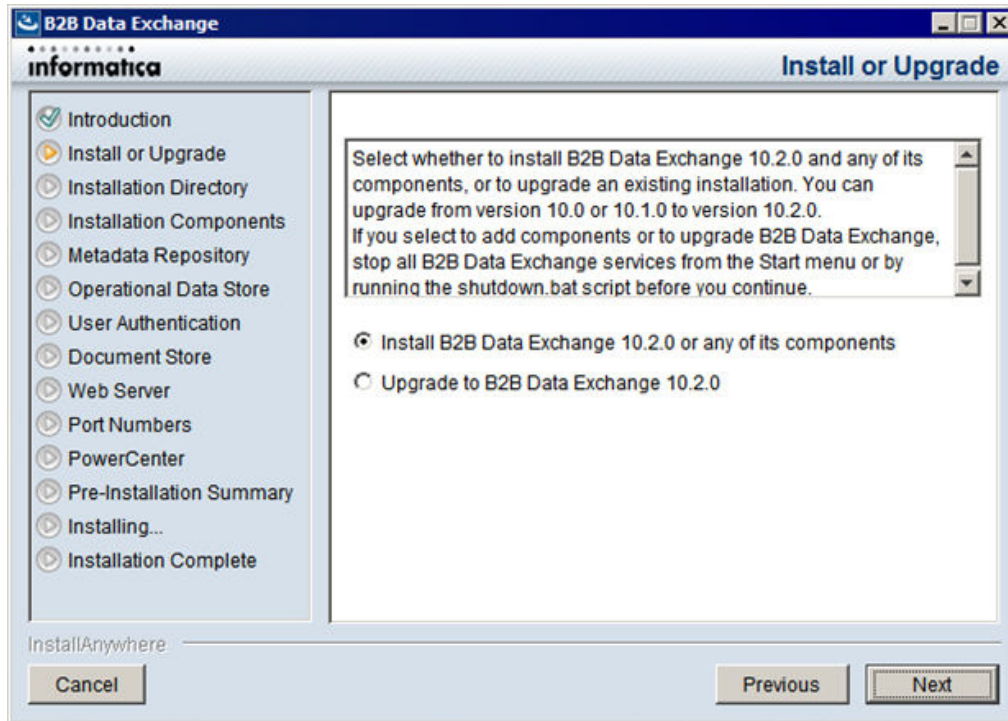


5. Select the option to install B2B Data Exchange, and then click **Next**.

The **Installation Directory** page appears.



## Step 2. Define Installation Settings

1. On the **Installation Directory** page, enter the absolute path to the installation directory or accept the default directory, and then click **Next**.

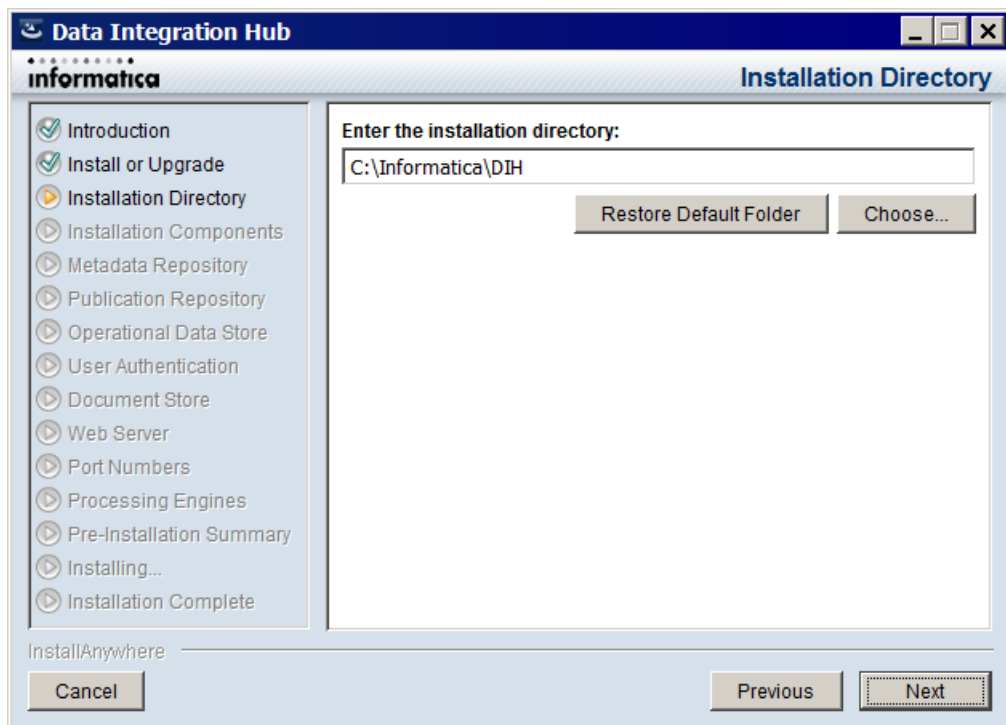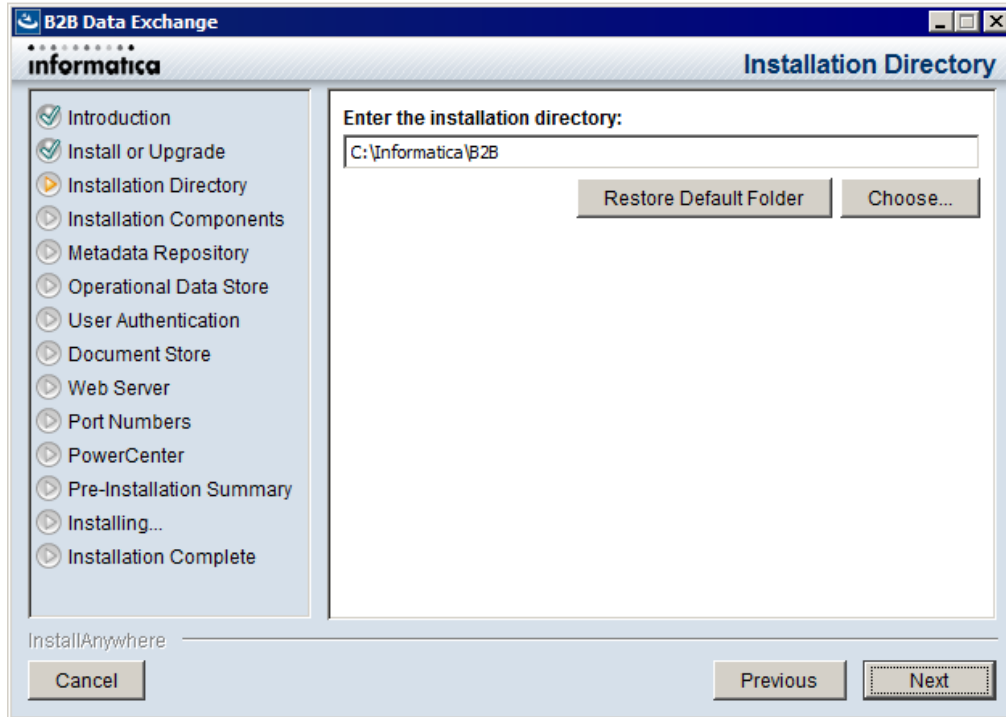

The **Installation Components** page appears:



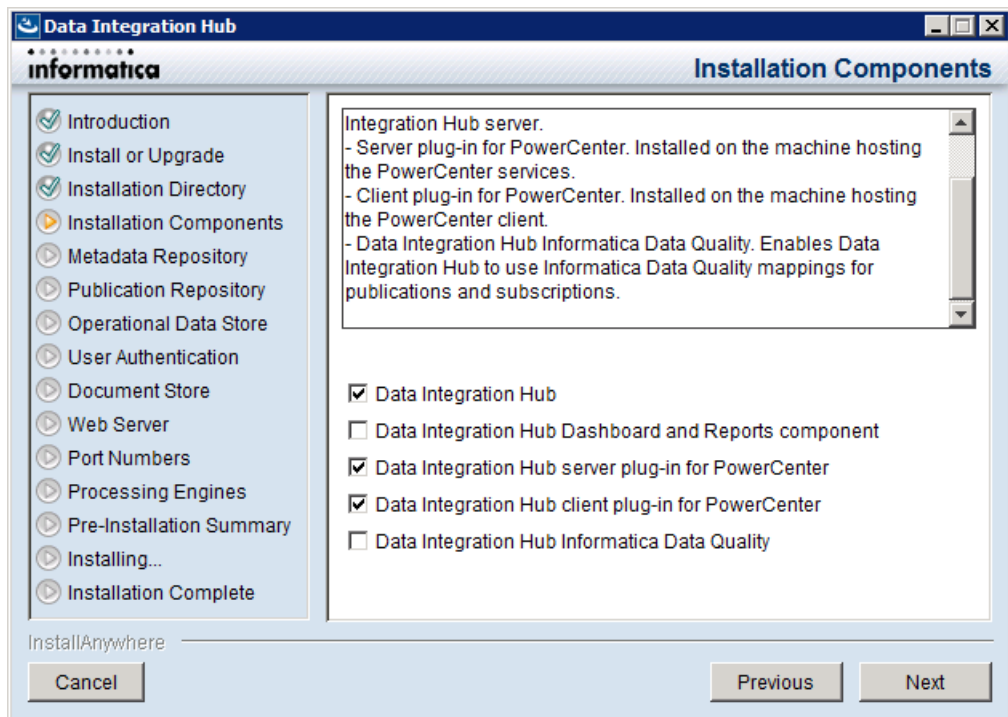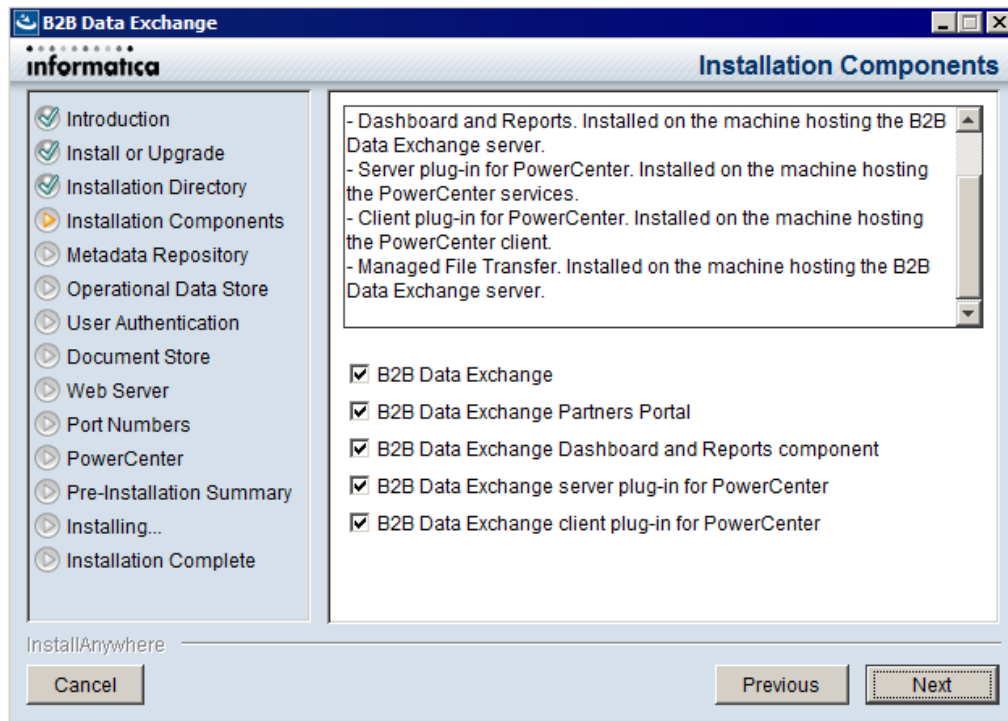

2. Select the components to install:

#### **B2B Data Exchange**

Installs the core B2B Data Exchange application.  
Selected by default.

#### **B2B Data Exchange Partners Portal**

Installs the B2B Data Exchange Partners Portal component. You must install B2B Data Exchange to install the Partners Portal component.

Selected by default.

#### **B2B Data Exchange Dashboard and Reports**

Installs the B2B Data Exchange Dashboard and Reports component. You must install B2B Data Exchange to install the Dashboard and Reports component.

Cleared by default.

##### **Note:**

- If you install the Dashboard and Reports component, you must import the operational data store event loader after you install B2B Data Exchange.
- If you install the Dashboard and Reports component, your B2B Data Exchange and operational data store repositories are installed on Microsoft SQL Servers, and you use PowerCenter version 10, you must configure the repository connections in PowerCenter Workflow Manager. For details, see [“Configuring Repository Connections on PowerCenter Version 10” on page 151](#).
- If you do not install the Dashboard and Reports component, the Dashboard will not be available in the Partners Portal.

#### **B2B Data Exchange PowerCenter server plug-in**

Installs the B2B Data Exchange plug-in for the PowerCenter services. After the installation, you register the plug-in to the PowerCenter repository.

Selected by default.

#### **B2B Data Exchange PowerCenter client plug-in**

Installs the B2B Data Exchange plug-in for the PowerCenter Client. Install this component on every machine that runs the PowerCenter Client.

Selected by default.

#### **B2B Data Exchange Informatica Data Quality**

Enables B2B Data Exchange to use Data Quality mappings for custom publications and subscriptions.

Select this component if you want to create custom publications and subscriptions that use Data Quality mappings in B2B Data Exchange.

Cleared by default.



3. Click **Next**.

The **Metadata Repository** page appears.

## **Step 3. Configure the B2B Data Exchange Repository Repositories**

1. On the **Metadata Repository** page, select one of the following options:
  - **Create a B2B Data Exchange repository.** Creates a repository in the database.
  - **Create a Data Integration Hub repository.** Creates a repository in the database.
  - **Use an existing B2B Data Exchange repository.** Uses the tables and data in an existing B2B Data Exchange repository and upgrades the repository.

- **Use an existing Data Integration Hub repository.** Uses the tables and data in an existing B2B Data Exchange repository and upgrades the repository.

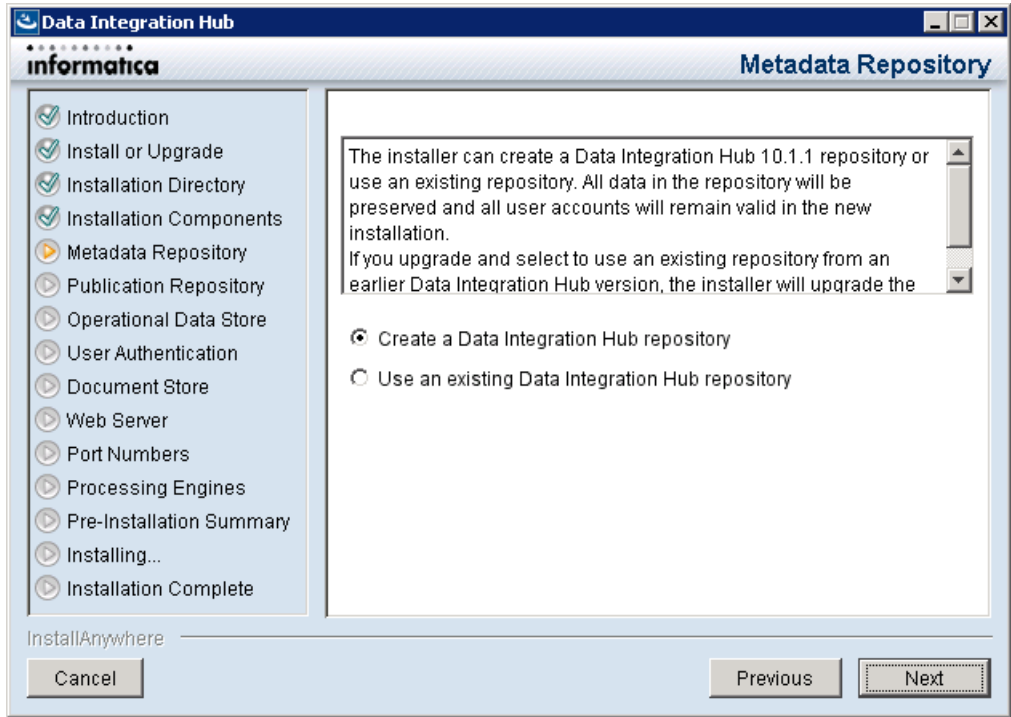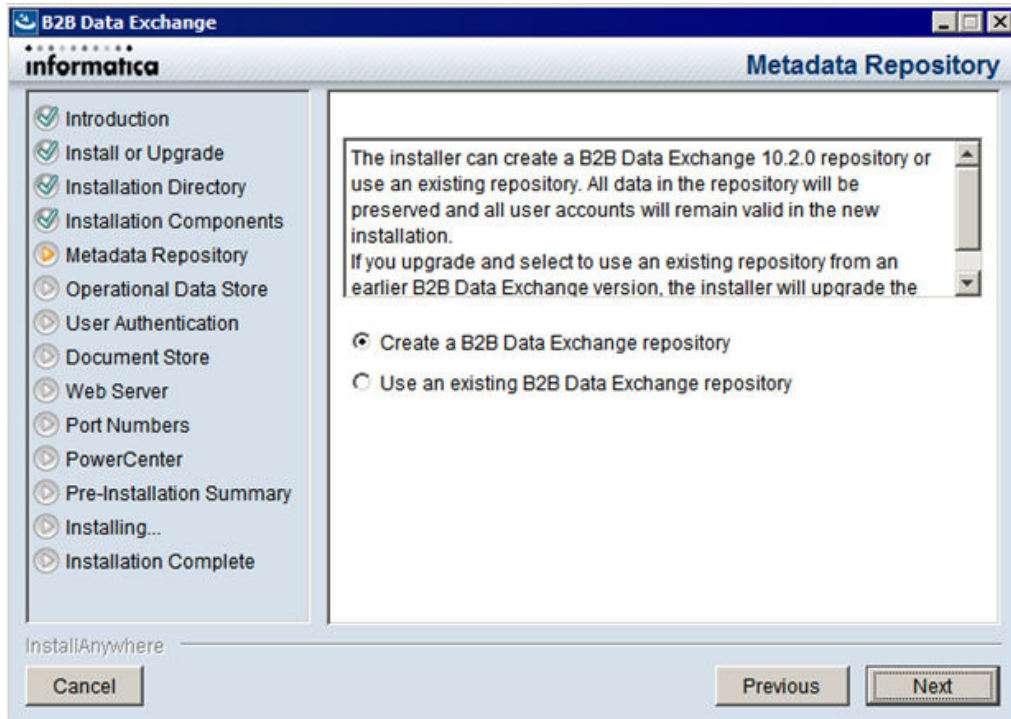

2. Click **Next**.

The **Metadata Repository Connection** page appears.

The screenshot shows the 'B2B Data Exchange' window with the 'informatics' logo and the title 'Metadata Repository Connection'. On the left is a navigation pane with a list of steps: Introduction, Install or Upgrade, Installation Directory, Installation Components, Metadata Repository (highlighted), Operational Data Store, User Authentication, Document Store, Web Server, Port Numbers, PowerCenter, Pre-Installation Summary, Installing..., and Installation Complete. The main area contains instructions: 'Enter the repository connection details. The repository you specify will store information about Operation Console objects. Note: When using Microsoft SQL Server named instances, you must define a custom connection string.' Below this are fields for 'Database type' (set to 'SQLServer'), 'Database URL' (selected), 'Database host name', 'Database port number' (1433), 'Database name', 'Custom connection string' (selected), 'JDBC string' (informatica:sqlserver://localhost:1433;DatabaseName=sa;), 'ODBC string' (D=%1;PWD=%2;Server=localhost, 1433;Database=sa), 'Use Windows Authentication' (unchecked), 'Database username', and 'Database user password'. At the bottom are 'Cancel', 'Previous', and 'Next' buttons.

The screenshot shows the 'Data Integration Hub' window with the 'informatics' logo and the title 'Metadata Repository Connection'. The navigation pane on the left includes: Introduction, Install or Upgrade, Installation Directory, Installation Components, Metadata Repository (highlighted), Publication Repository, Operational Data Store, User Authentication, Document Store, Web Server, Port Numbers, Processing Engines, Pre-Installation Summary, Installing..., and Installation Complete. The main area contains the same instructions as the first screenshot. Fields include 'Database type' (set to 'Oracle'), 'Database URL' (selected), 'Database host name', 'Database port number' (1521), 'Database SID', 'Custom connection string' (selected), 'JDBC string' (jdbc:informatica:oracle://localhost:1521;SID=orcl;), 'ODBC string' (UID=%1;PWD=%2;Host=localhost;Port=1521;SN=orcl), 'Use Windows Authentication' (checked), 'Database username', and 'Database user password'. At the bottom are 'Cancel', 'Previous', and 'Next' buttons.

3. Enter values in the following fields:

### Database type

Type of database to use for the B2B Data Exchange metadata repository. You can choose one of the following options:

- Oracle
- Microsoft SQL Server

### Database URL

Location of the database.

If you select this option, enter the values in the following fields:

- **Database host name.** Host name of the machine where the database server is installed.
- **Database port.** Port number for the database. The default port number for Oracle is 1521. The default port number for Microsoft SQL Server is 1433.
- **Database SID.** System identifier for the database if the database is Oracle. Enter either a fully qualified ServiceName or a fully qualified SID.

**Note:** It is recommended that you enter a ServiceName in this field.

- **Microsoft SQL Server database.** Database name.

### Custom Connection String

Connection string to the database.

If you select this option, enter values in one of the following fields:

- **JDBC string.** JDBC connection string to the metadata repository.
- **ODBC string.** ODBC connection string to the metadata repository. Available if you install the PowerCenter Client plug-in. The installer cannot verify the validity of the ODBC string.

**Note:** If you use a named Microsoft SQL Server database instance, you cannot connect to the database instance using the **Database URL** option. Use the **Custom Connection String** option.

For example:

```
jdbc:informatica:sqlserver://MYSQLSERVERCOMPUTERHOSTNAME  
\MYDBINSTANCENAME;DatabaseName=MYDATABASENAME;
```

### Use Windows Authentication

Instructs B2B Data Exchange to authenticate user names against the Microsoft Windows authentication mechanism. Available when you select a Microsoft SQL Server database.

### Database username


Name of the database user account for the Oracle database or Microsoft SQL Server database where you do not use Windows authentication.

### Database user password

Password for the database account for the Oracle database or Microsoft SQL Server database where you do not use Windows authentication. B2B Data Exchange stores the password as an encrypted string.

4. Click **Next**.

The **Publication Repository Connection** page appears.

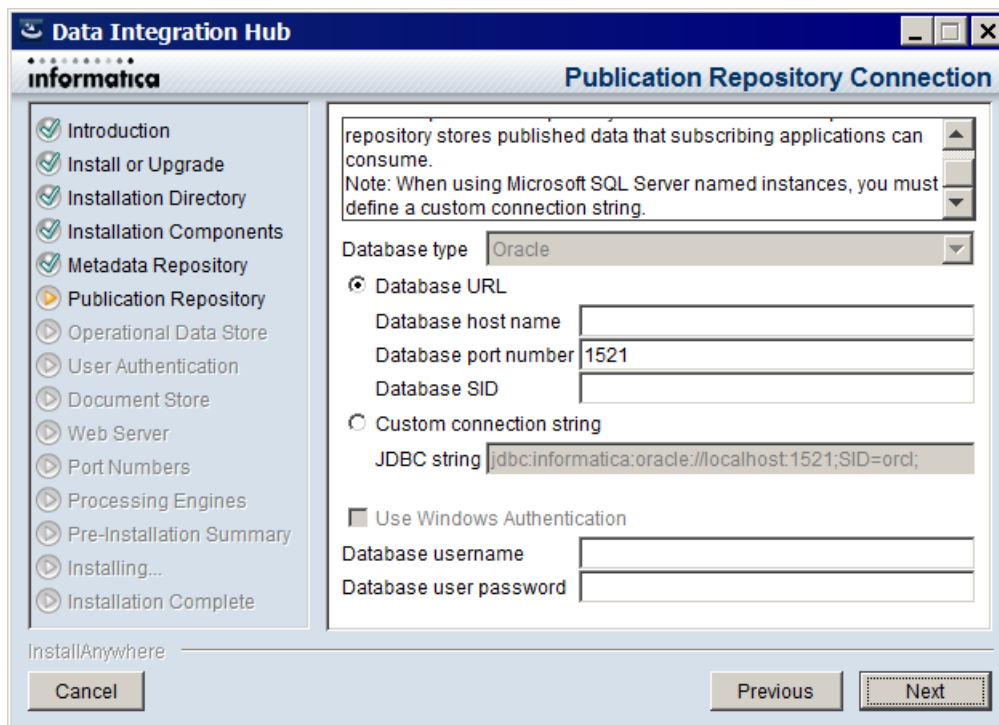

5. Enter values in the following fields:

**Database type**

Type of database to use for the publication repository. The database type must match the B2B Data Exchange metadata repository database type and appears in read-only mode.

**Database URL**

Location of the database.

If you select this option, enter values in the following fields:

- **Database host name.** Host name of the machine where the database server is installed.
- **Database port.** Port number for the database. The default port number for Oracle is 1521. The default port for Microsoft SQL Server is 1433.
- **Database SID.** System identifier for the database if the database is Oracle. Enter either a fully qualified ServiceName or a fully qualified SID.  
**Note:** It is recommended that you enter a ServiceName in this field.
- **Microsoft SQL Server database: Database name.** Name of the database instance.

**Custom Connection String**

JDBC connection string to the database.

**Note:** If you use a named Microsoft SQL Server database instance, you cannot connect to the database instance using the **Database URL** option. Use the **Custom Connection String** option.

**Use Windows Authentication**

Instructs B2B Data Exchange to authenticate user names against the Microsoft Windows authentication mechanism. Available when you select a Microsoft SQL Server database.

**Database username**

Name of the database user account for the Oracle database or Microsoft SQL Server database where you do not use Windows authentication.

**Database user password**

Password of the database account for the Oracle database or Microsoft SQL Server database where you do not use Windows authentication. B2B Data Exchange stores the password as an encrypted string.



6. Click **Next**.

If you selected the **B2B Data Exchange Dashboard and Reports** component, the **Operational Data Store** page appears. If you did not select the Dashboard and Reports component, go to [“Step 5. Configure User Authentication” on page 34](#).

## Step 4. Set Up the Operational Data Store

1. On the **Operational Data Store** page, select one of the following options:
  - **Create an operational data store repository**. Creates an operational data store repository in the database.

- **Use an existing operational data store repository.** Uses the tables and data in an existing operational data store repository.

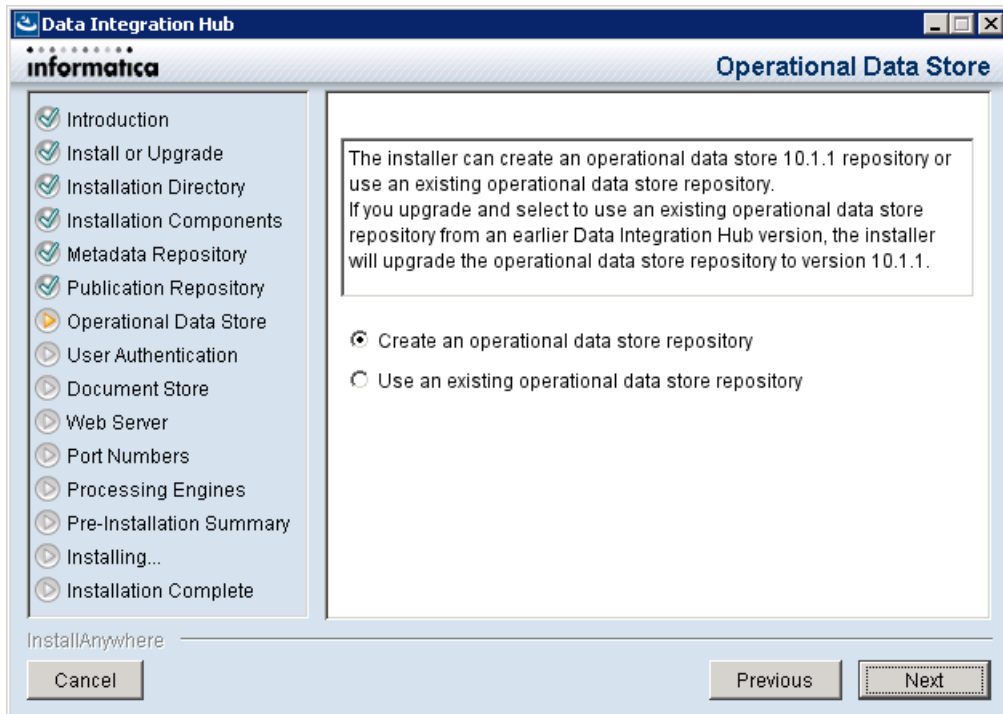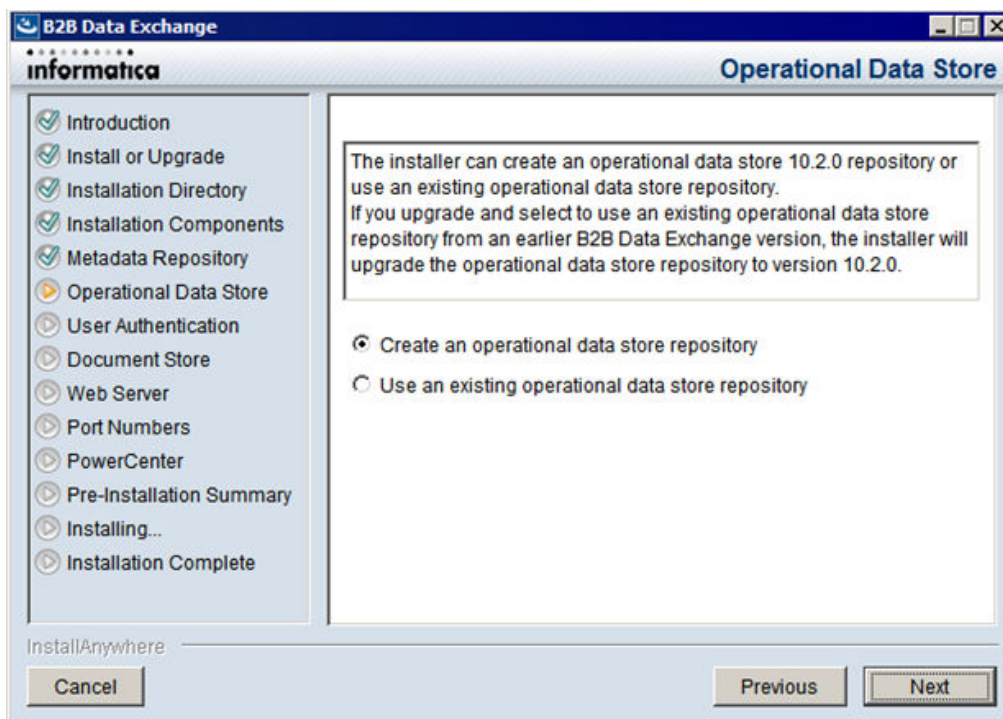

2. Click **Next**.



The **Operational Data Store Database Connection** page appears.

The screenshot shows the 'Operational Data Store Database Connection' window for 'B2B Data Exchange'. The left sidebar lists installation steps, with 'Operational Data Store' selected. The main area contains a text box with instructions: 'Enter the database connection details for the operational data store. Note: When using Microsoft SQL Server named instances, you must define a custom connection string.' Below this, the 'Database type' is set to 'SQLServer'. The 'Database URL' radio button is selected, with fields for 'Database host name', 'Database port number' (1433), and 'Database name'. The 'Custom connection string' radio button is unselected, with a 'JDBC string' field containing 'itica:sqlserver://localhost:1433;DatabaseName=dxods;'. There is a checkbox for 'Use Windows Authentication' which is unchecked. Fields for 'Database username' and 'Database user password' are present. At the bottom, there are 'Cancel', 'Previous', and 'Next' buttons.

The screenshot shows the 'Operational Data Store Database Connection' window for 'Data Integration Hub'. The left sidebar lists installation steps, with 'Operational Data Store' selected. The main area contains a text box with instructions: 'Enter the database connection details for the operational data store. Note: When using Microsoft SQL Server named instances, you must define a custom connection string.' Below this, the 'Database type' is set to 'Oracle'. The 'Database URL' radio button is selected, with fields for 'Database host name', 'Database port number' (1521), and 'Database SID'. The 'Custom connection string' radio button is unselected, with a 'JDBC string' field containing 'jdbc:informatica:oracle://localhost:1521;SID=ord;'. There is a checkbox for 'Use Windows Authentication' which is checked. Fields for 'Database username' and 'Database user password' are present. At the bottom, there are 'Cancel', 'Previous', and 'Next' buttons.

3. Enter values in the following fields:

### Database URL

Location of the database. If you select this option, enter the values in the following fields:

- **Database host name.** Host name of the machine where the database server is installed.
- **Database port.** Port number for the database. The default port number for the Oracle is 1521. The default port number for the Microsoft SQL Server is 1433.
- **Database SID.** System identifier for the database if you select Oracle as the database. Enter either a fully qualified ServiceName or a fully qualified SID.  
**Note:** It is recommended that you enter a ServiceName in this field.
- **Microsoft SQL Server database.** Database name.

### Custom Connection String

Connection string to the database. If you select this option, enter values in one of the following fields:

- **JDBC string.** JDBC connection string to the Operational Data Store.
- **ODBC string.** ODBC connection string to the Operational Data Store. Available if you install the PowerCenter Client plug-in. The installer cannot verify the validity of the ODBC string.

**Note:** If you use a named Microsoft SQL Server database instance, you cannot connect to the database instance using the **Database URL** option. Use the **Custom Connection String** option.

For example:

```
jdbc:informatica:sqlserver://MYSQLSERVERCOMPUTERHOSTNAME  
\MYDBINSTANCENAME;DatabaseName=MYDATABASENAME;
```

### Use Windows Authentication

Instructs B2B Data Exchange to authenticate user names against the Microsoft Windows authentication mechanism. Available when you select a Microsoft SQL Server database.

### Database username

Name of the operational data store user account for the Oracle database or the Microsoft SQL Server database where you do not use Windows authentication.

### Database user password

Password for the operational data store account for the Oracle database or the Microsoft SQL Server database where you do not use Windows authentication. B2B Data Exchange stores the password as an encrypted string.

4. Click **Next**.

If you create a repository in the database, the **User Authentication** page appears. If you select an existing repository, the installer selects the existing authentication method. Go to [“Step 6. Configure Document Store and Web Server Configure Document Store, Web Server, and Port Numbers” on page 42.](#)



## Step 5. Configure User Authentication

1. On the **User Authentication** page, choose the type of user authentication that you want to use.
  - Choose **Informatica domain authentication** to manage user credentials in the Informatica domain and synchronize user information with B2B Data Exchange. Use Informatica domain authentication for production environments. For more information, see [“Configure Settings for Informatica Domain Authentication” on page 37.](#)

**Note:** If your Informatica domain uses Kerberos authentication, choose the option **Informatica domain with Kerberos authentication**.

- Choose **Informatica domain with Kerberos authentication** if the Informatica domain uses Kerberos authentication. Use Informatica domain with Kerberos authentication for production environments. For more information, see [“Configure Settings for Informatica Domain with Kerberos Authentication” on page 38](#).
- Choose **B2B Data Exchange native authenticationData Integration Hub native authentication** to manage user credentials locally in B2B Data Exchange. Use native authentication in development and

staging environments. For more information, see [“Configure Settings for B2B Data Exchange Native Authentication”](#) on page 40.

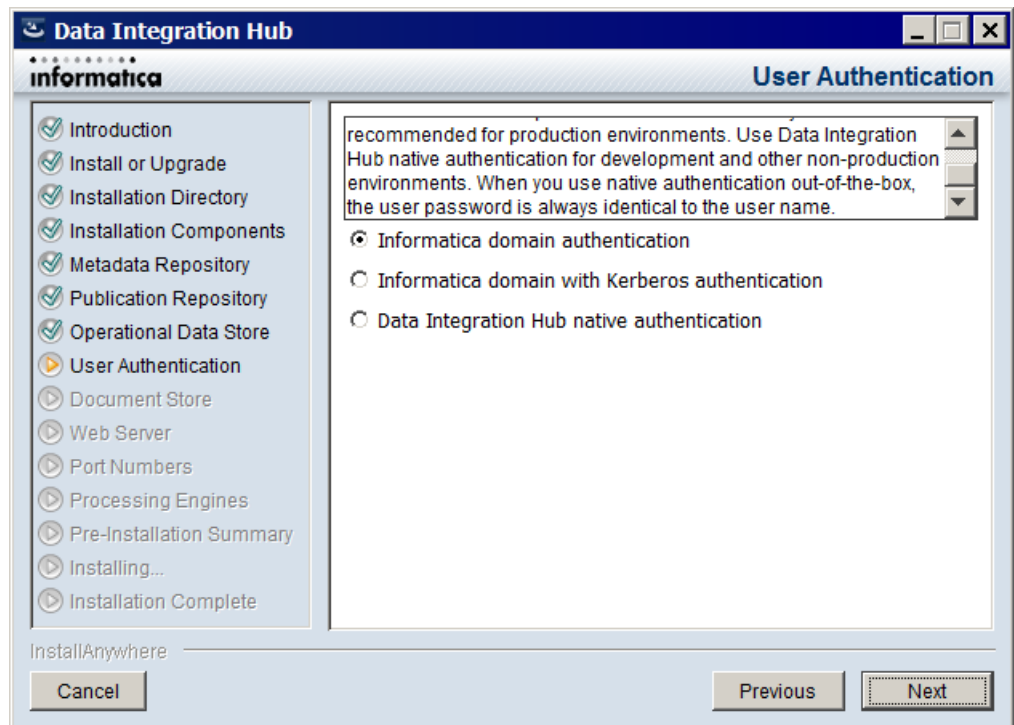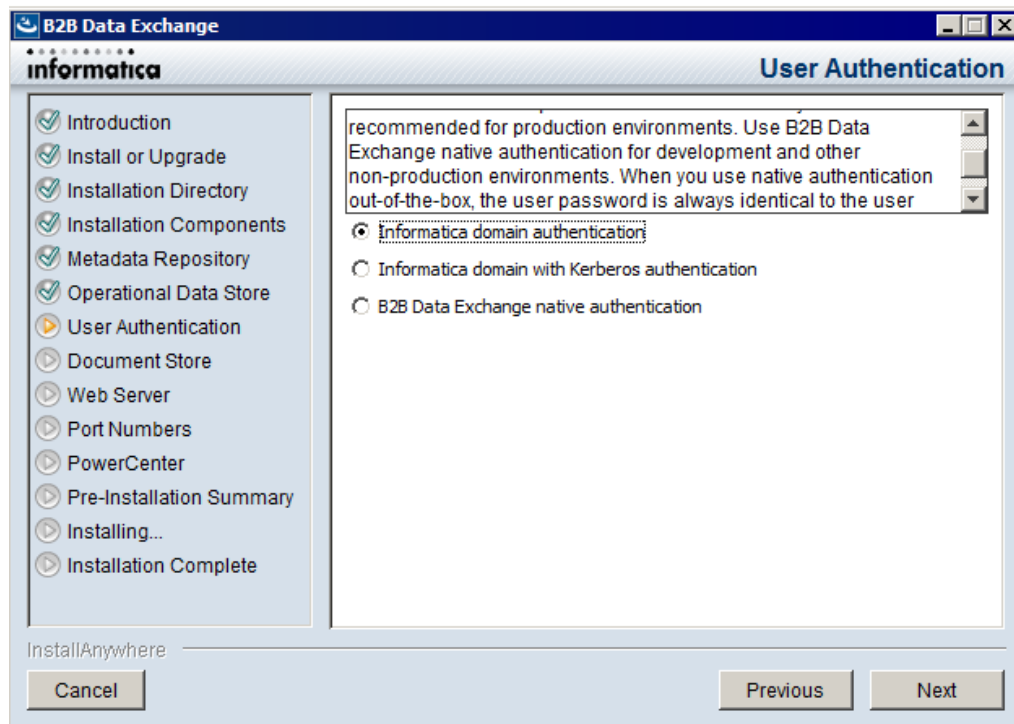

2. Enter the authentication information, and then click **Next**.

The **Data Integration Hub Document Store**Data Exchange Document Store page appears.

## Configure Settings for Informatica Domain Authentication

If you select the **Informatica Domain Authentication** option on the **User Authentication** page, you can configure the Informatica domain authentication settings on the **Informatica Platform Authentication** page.

The following image shows the **Informatica Platform Authentication** page.

The screenshot shows a window titled "B2B Data Exchange" with a sub-header "Informatica Platform Authentication". On the left is a navigation pane with a list of steps: Introduction, Install or Upgrade, Installation Directory, Installation Components, Metadata Repository, Operational Data Store, User Authentication (highlighted with a play icon), Document Store, Web Server, Port Numbers, PowerCenter, Pre-Installation Summary, Installing..., and Installation Complete. The main area contains the text: "Enter connection information for the Informatica security domain. Provide the user account of the B2B Data Exchange Operation Console administrator." Below this are six input fields: Gateway host, Gateway port number, Username, Password, Security domain, and Security group (optional). At the bottom are "Cancel", "Previous", and "Next" buttons.

The screenshot shows a window titled "Data Integration Hub" with a sub-header "Informatica Platform Authentication". On the left is a navigation pane with a list of steps: Introduction, Install or Upgrade, Installation Directory, Installation Components, Metadata Repository, Publication Repository, Operational Data Store, User Authentication (highlighted with a play icon), Document Store, Web Server, Port Numbers, Processing Engines, Pre-Installation Summary, Installing..., and Installation Complete. The main area contains the text: "Enter connection information for the Informatica security domain. Provide the user account of the Data Integration Hub Operation Console administrator." Below this are six input fields: Gateway host, Gateway port number, Username, Password, Security domain, and Security group (optional). At the bottom are "Cancel", "Previous", and "Next" buttons.

The following table describes the settings that you need to configure for the **Informatica Platform Authentication** page:

**Gateway host**

Host name of the Informatica security domain server. B2B Data Exchange stores the host name in the `pwc.domain.gateway` system property.

**Gateway port number**

Port number for the Informatica security domain gateway. B2B Data Exchange stores the port number in the `pwc.domain.gateway` system property. Use the gateway HTTP port number to connect to the domain from the PowerCenter Client. You cannot use the HTTPS port number to connect to the domain.

**Username**

User name to access the Administrator tool. You must create the user in the Administrator tool and assign the **manage roles/groups/user** privilege to the user.

**Password**

Password of the Informatica security domain user.

**Security domain**

Name of the Informatica security domain where the user is defined.

**Security group**

Optional. Security group within the Informatica security domain where B2B Data Exchange users are defined in the following format:

```
<security group>@<domain>
```

If you leave the field empty, the Informatica security domain synchronizes only the B2B Data Exchange administrator user account.



B2B Data Exchange stores the security group in the `dx.authentication.groups` system property in the following format:

```
<group name>@<security group>[;<groupname>@<security group>]
```

## Configure Settings for Informatica Domain with Kerberos Authentication

If you select the **Informatica domain with Kerberos authentication** option on the **User Authentication** page, you can configure the authentication settings on the **Informatica Domain with Kerberos Authentication** page.

The following image shows the **Informatica Domain with Kerberos Authentication** page.

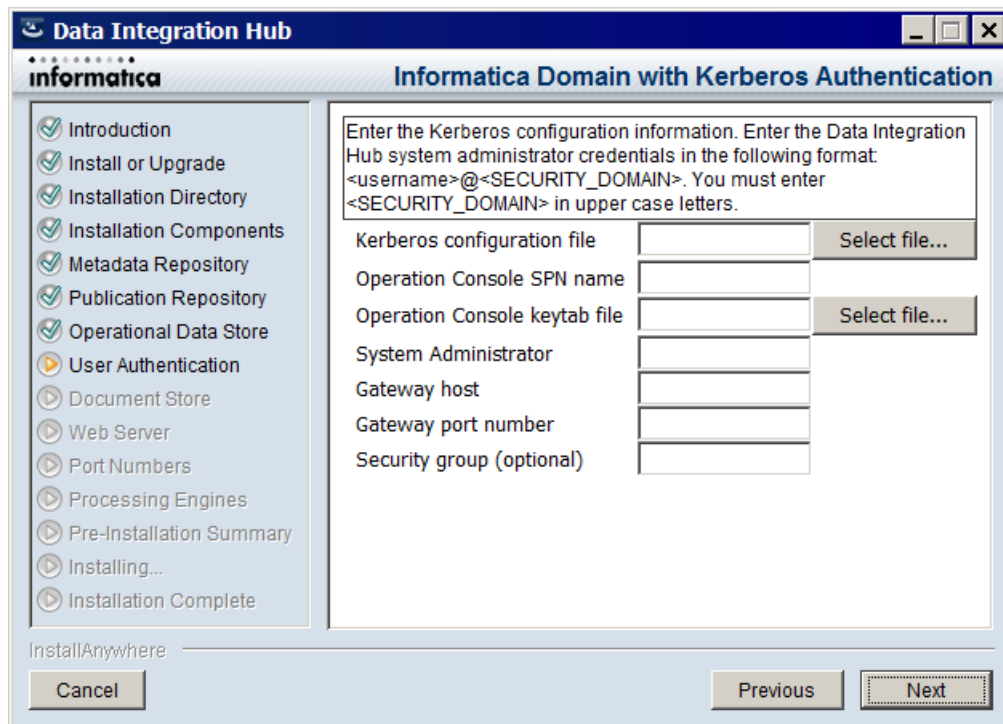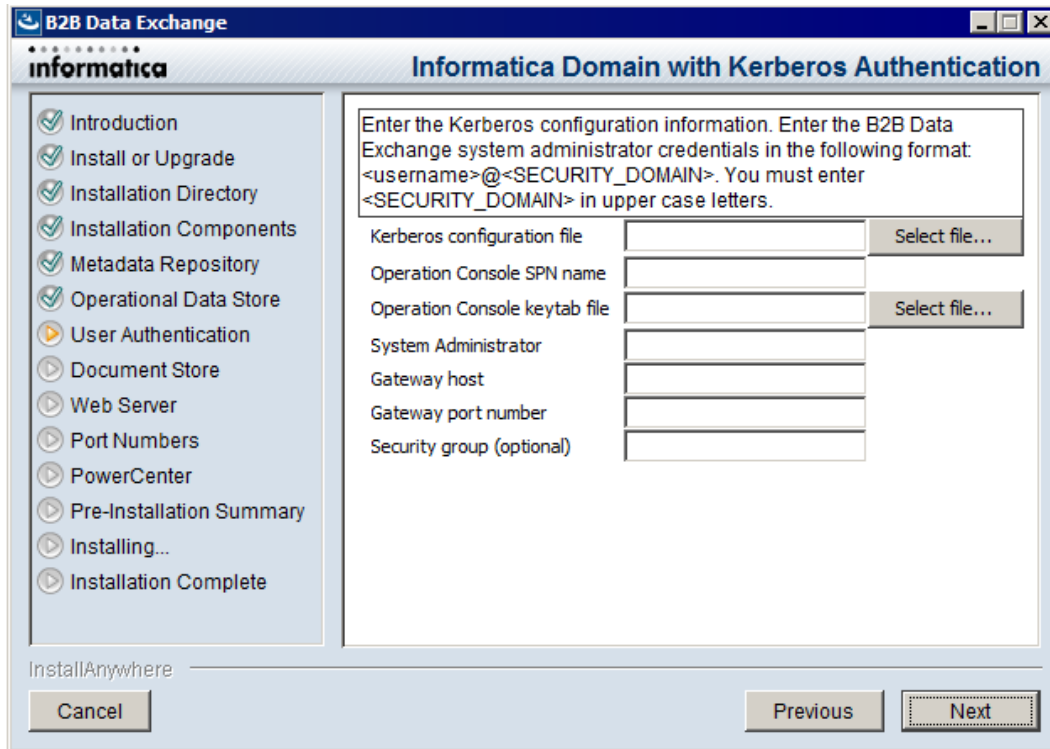

Enter the configuration information.

**Kerberos configuration file**

File that stores Keberos configuration information, usually named `krb5.conf`

The installation copies the file to the following location:

```
<DXInstallationDir>/shared/conf/security/krb5.conf
```

#### **Operation Console SPN name**

Service Principal Name (SPN) for the B2B Data Exchange Operation Console.

B2B Data Exchange stores the SPN in the `dx-security-config.properties` property file, in the `dx.kerberos.console.service.principal.name` property.

#### **Operation Console keytab file**

Location of the keytab file for the B2B Data Exchange Operation Console SPN.

The installer copies the file to the following location:

```
<DXInstallationDir>/shared/conf/security/HTTP_console.keytab
```

B2B Data Exchange stores the location of the keytab file in the `dx-security-config.properties` property file, in the `dx.kerberos.console.keytab.file` property.

If you change the property to point to a different file, you must enter the absolute path to the file using the following format:

```
file://<full_path>
```

#### **System Administrator**

B2B Data Exchange system administrator credentials.

Enter the credentials in the following format:

```
<username>@<SECURITY_DOMAIN>
```

**Note:** You must enter `<SECURITY_DOMAIN>` in uppercase letters.

#### **Gateway host**

PowerCenter domain gateway host.

#### **Gateway port number**

PowerCenter domain gateway port number.

#### **Security group**

Optional. Security group within the Informatica security domain where B2B Data Exchange users are defined in the following format:

```
<security group>@<domain>
```

If you leave the field empty, the Informatica security domain synchronizes only the B2B Data Exchange administrator user account.

B2B Data Exchange stores the security group in the `dx.authentication.groups` system property in the following format:



```
<group name>@<security group>[;<groupname>@<security group>]
```

## **Configure Settings for B2B Data Exchange Native Authentication**

If you select the **B2B Data Exchange native authentication** option on the **User Authentication** page, you need to enter the B2B Data Exchange administrator user name on the **Operation Console Administrator** page. B2B Data Exchange uses this value for the user name and password when you log in to the Operation Console.




The following image shows the **Operation Console Administrator** page.

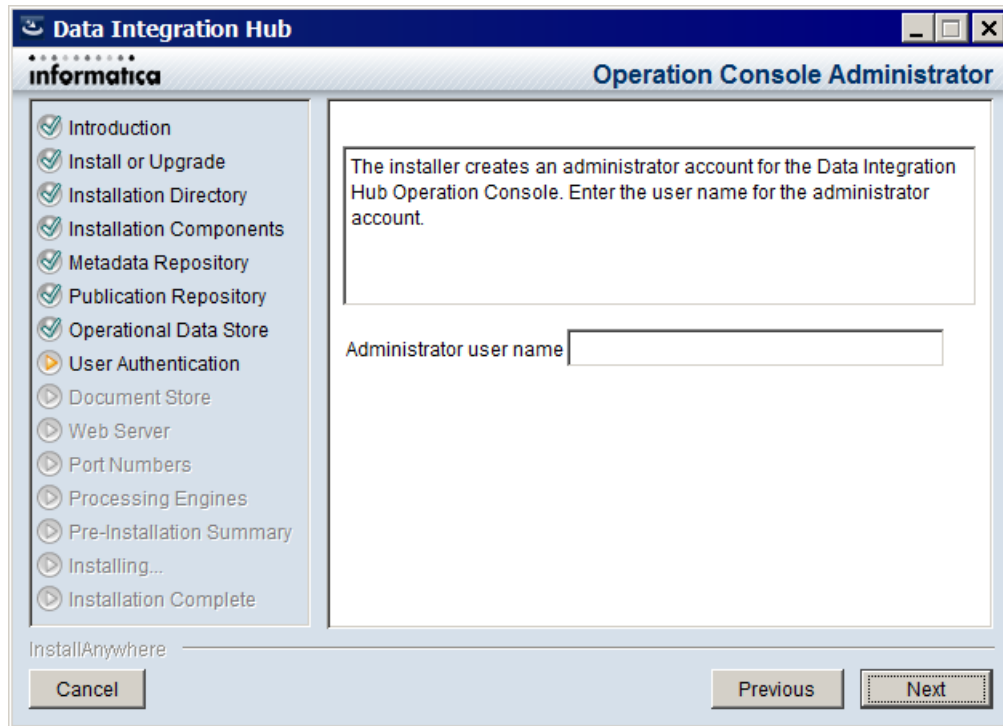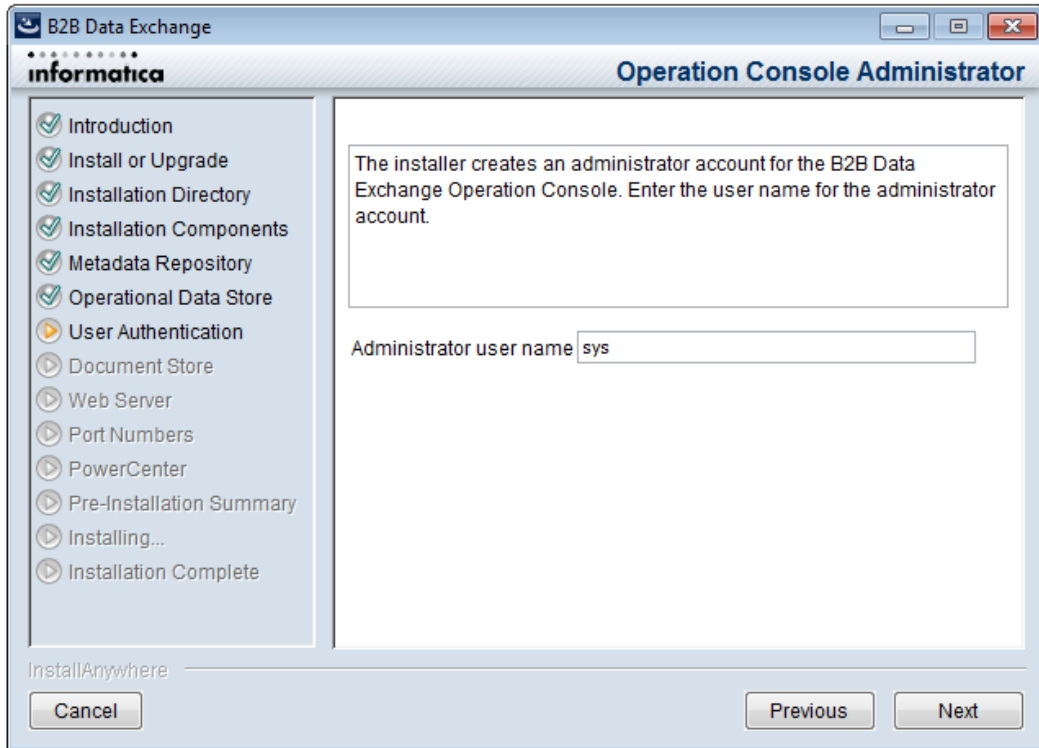


## Step 6. Configure Document Store and Web Server Configure Document Store, Web Server, and Port Numbers

1. On the **Data Integration Hub Document Store Data Exchange Document Store** page, accept the default directory or enter the directory where you want to create the document store directory.

B2B Data Exchange stores documents and files in the document store during processing. The document store directory must be accessible to B2B Data Exchange, PowerCenter services, and Data Transformation.

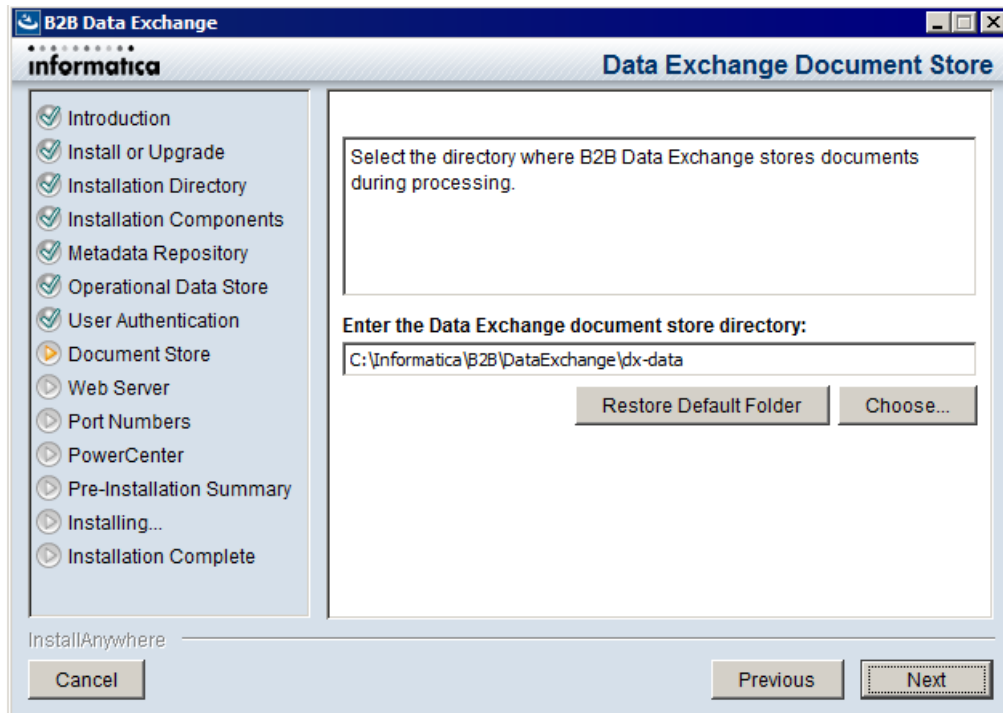

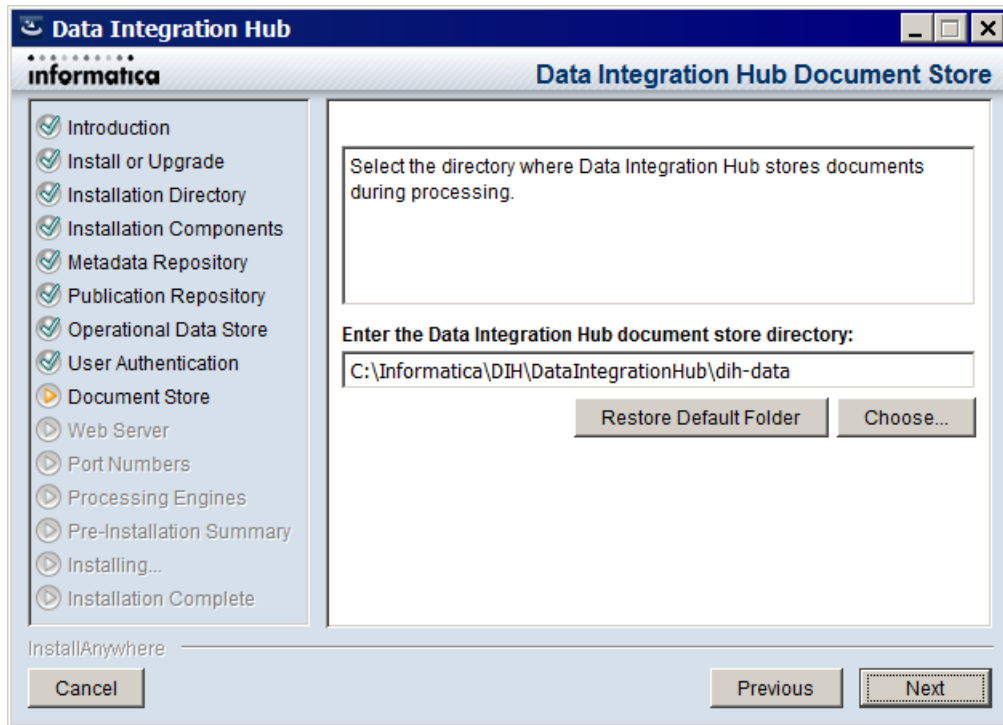

2. Click **Next**.

The **Web Server** page appears.

The screenshot shows the 'B2B Data Exchange' installer window, specifically the 'Web Server' configuration page. The window title is 'B2B Data Exchange' and the Informatica logo is visible. The left sidebar contains a list of installation steps, with 'Web Server' highlighted. The main area contains the following text and fields:

Specify the Web Server (Tomcat) port numbers and connection details.  
If you select HTTP and HTTPS ports, HTTPS will always be used and HTTP requests will be redirected to the HTTPS port.

Enable HTTPS  
Connector port number

Use a keystore file generated by the installer  
 Use an existing keystore file  
Keystore password   
Keystore file

HTTP connector port number   
Server shutdown listener port number

At the bottom, there are 'Cancel', 'Previous', and 'Next' buttons.

The screenshot shows the 'Data Integration Hub' installer window, specifically the 'Web Server' configuration page. The window title is 'Data Integration Hub' and the Informatica logo is visible. The left sidebar contains a list of installation steps, with 'Web Server' highlighted. The main area contains the following text and fields:

Specify the Web Server (Tomcat) port numbers and connection details.  
If you select HTTP and HTTPS ports, HTTPS will always be used and HTTP requests will be redirected to the HTTPS port.

Enable HTTPS  
Connector port number

Use a keystore file generated by the installer  
 Use an existing keystore file  
Keystore password   
Keystore file

HTTP connector port number   
Server shutdown listener port number

At the bottom, there are 'Cancel', 'Previous', and 'Next' buttons.

3. Enter values in the following fields:

**Enable HTTPS**

Instructs B2B Data Exchange to use secure network communication when you open the Operation Console in the browser. If you select HTTPS and HTTP, the Operation Console switches existing HTTP connections with HTTPS connections.

**Connector port number**

Port number for the Tomcat connector to use when you open the Operation Console with HTTPS. The default value is 18443.

**Use a keystore file generated by the installer**

Instructs the installer to generate a keystore file with an unregistered certificate. If you select this option, ignore the security warning that you receive from the browser the first time you open the Operation Console.

**Use an existing keystore file**

Instructs the installer to load an existing keystore file. Enter values in the following fields:

- Keystore password. Password for the keystore file.
- Keystore file. Path to the keystore file.

The keystore file must be in the Public Key Cryptography Standard (PKCS) #12 format.

**HTTP connector port number**


Port number for the HTTP connector. If you clear this field, your browser must connect to the B2B Data Exchange server with HTTPS when you log in to the Operation Console. The default value is 18080.

**Server shutdown listener port number**

Port number for the listener that controls the Tomcat server shutdown. The default value is 18005.

4. Click **Next**.

The **Port Numbers** page appears.

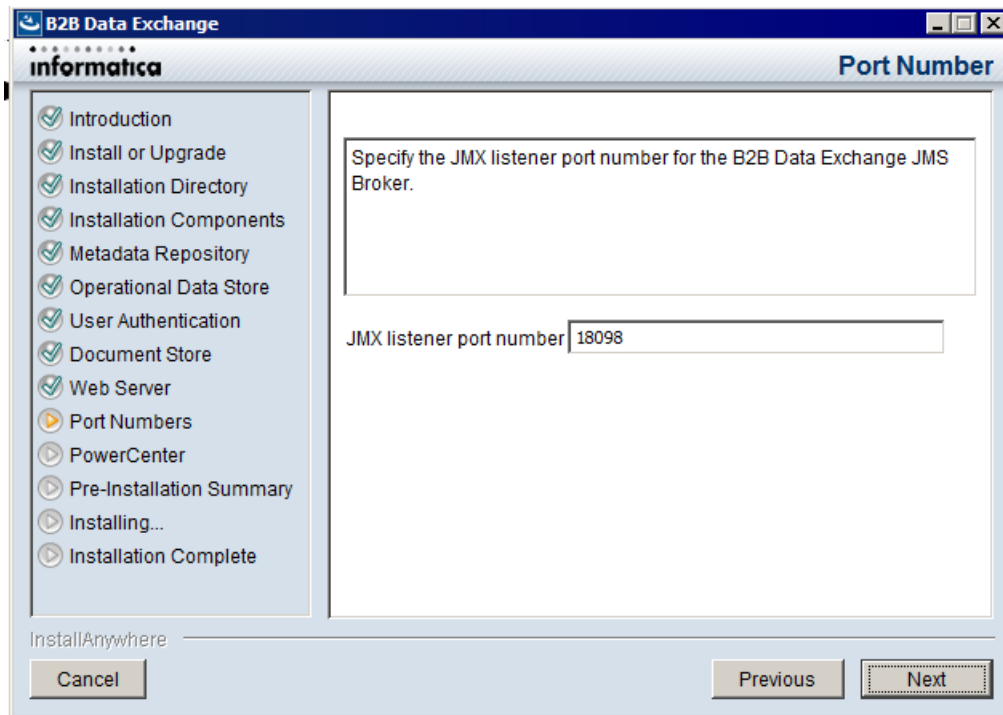



If you selected to install the B2B Data Exchange server plug-in for PowerCenter or the B2B Data Exchange client plug-in for PowerCenter components, the **PowerCenter Location** page appears. If you did not select the PowerCenter server or client components, the **PowerCenter Web Services Hub** page appears.

5. Enter the port number for the B2B Data Exchange JMS Broker JMX listener port or accept the default port, and then click **Next**.



If you selected to install the B2B Data Exchange server plug-in for PowerCenter or the B2B Data Exchange client plug-in for PowerCenter components, the **PowerCenter Location** page appears. If you did not select the PowerCenter server or client components, the **PowerCenter Web Services Hub** page appears.

## Step 7. Configure PowerCenter Settings

1. If you selected to install the B2B Data Exchange server plug-in for PowerCenter or the B2B Data Exchange client plug-in for PowerCenter components, on the **PowerCenter Location** page, enter the directory where you installed PowerCenter or accept the default directory, and then click **Next**.

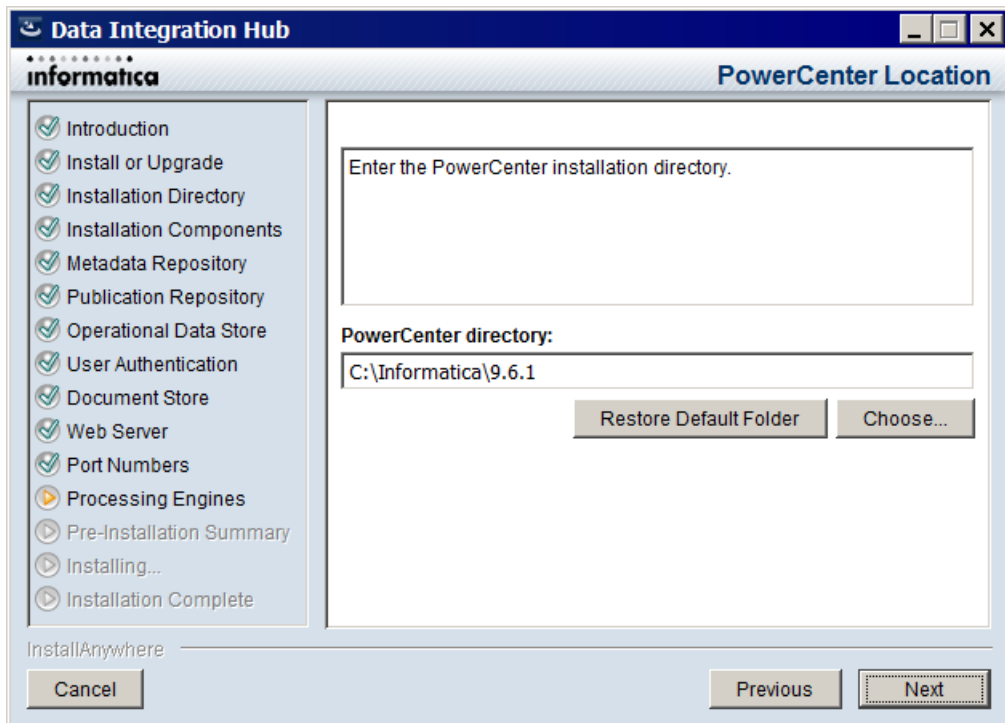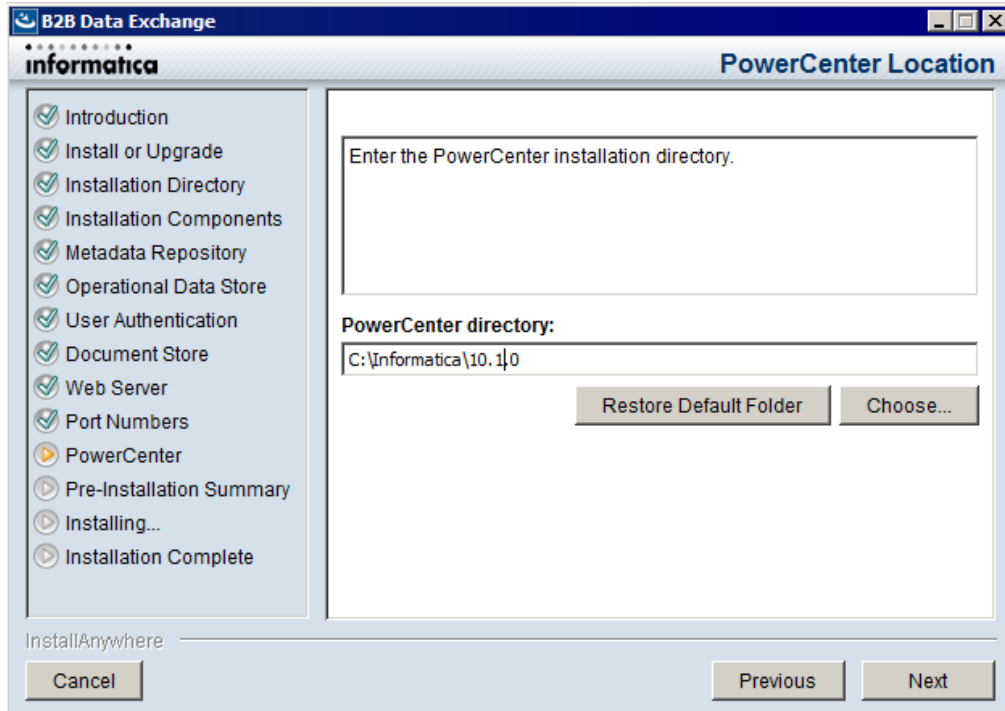

The **PowerCenter Web Services Hub** page appears.

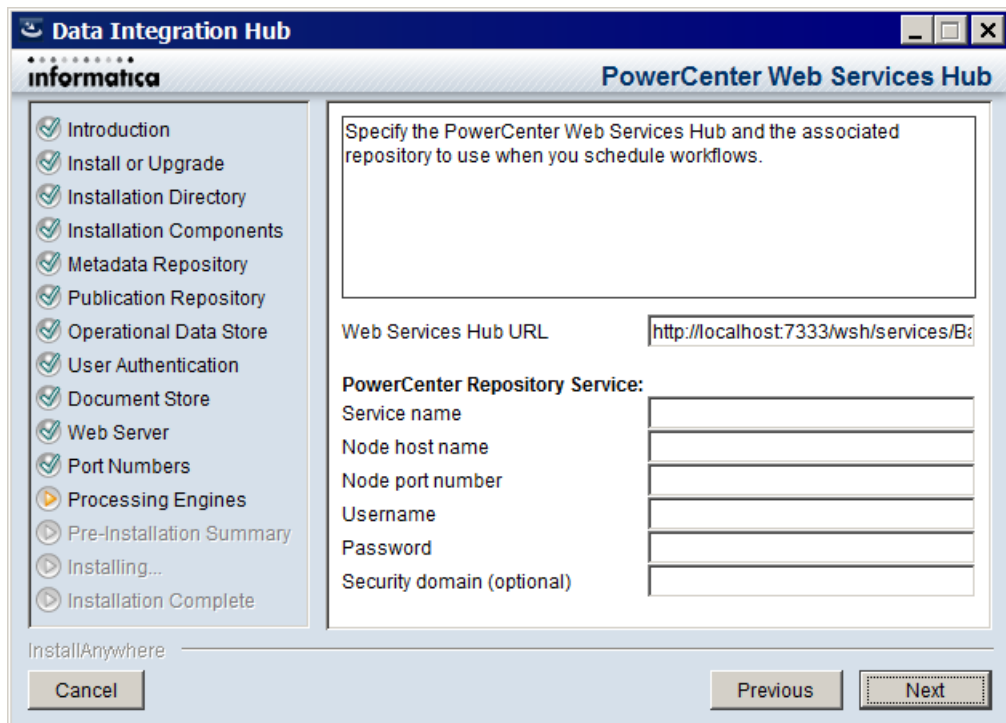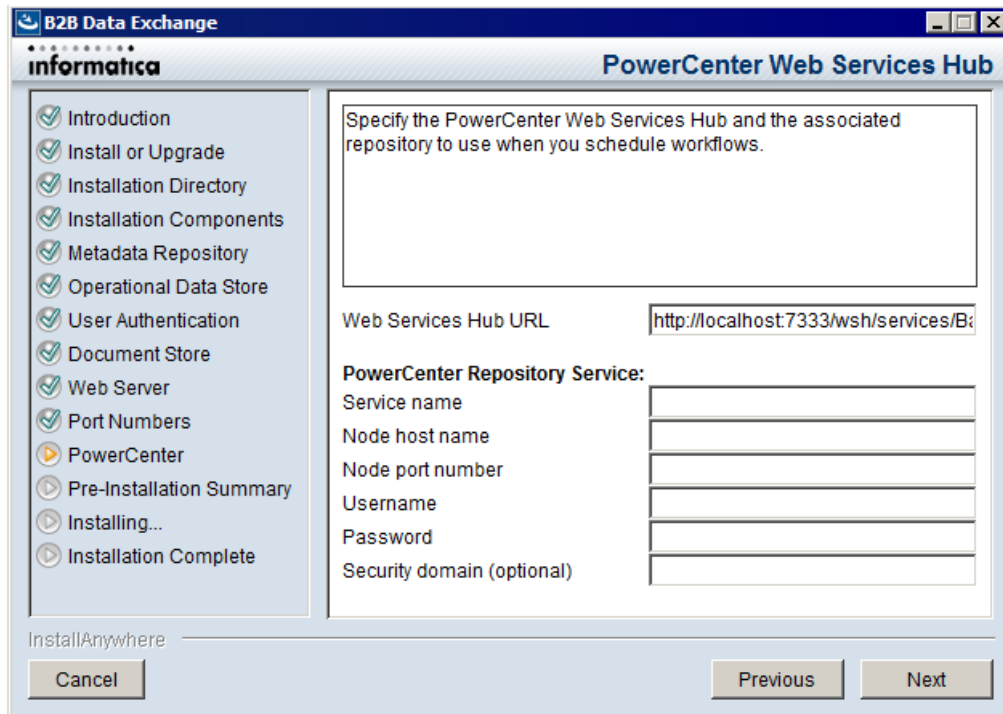

2. On the **PowerCenter Web Services Hub** page, enter the PowerCenter web services details.



**Web Services Hub URL**

URL that the PowerCenter Web Services Hub uses when B2B Data Exchange transfers documents to PowerCenter for processing with batch workflows to process publication and subscription workflows.

**Service name**

Name of the PowerCenter Repository Service.

**Node host name**

Host name of the node that runs the PowerCenter Repository Service.

**Node port number**

Port number of the node that runs the PowerCenter Repository Service.

**Username**

Name of the PowerCenter Repository Service user.

**Password**

Password for the PowerCenter Repository Service user. B2B Data Exchange stores the password as an encrypted string.

**Security domain**

Optional. Name of the Informatica security domain in which the PowerCenter Repository Service user is stored.

Default is Native.

3. Click **Next**.

If you selected to install the B2B Data Exchange server plug-in for PowerCenter component, the **PowerCenter Domain Settings** page appears.

If you did not select the PowerCenter server component, the **PowerCenter pmrep Command Line Utility Location** page appears. Go to step [6](#).

The screenshot shows the 'B2B Data Exchange' window with the 'PowerCenter Domain Settings' tab selected. On the left, a list of installation components is shown, with 'PowerCenter' highlighted. The main area contains a text box with instructions: 'Specify the Informatica domain, the administrator user account, and the PowerCenter Integration Service to run workflows.' Below this are five input fields: 'Domain name', 'Node name', 'Domain administrator username', 'Domain administrator password', and 'Integration Service name'. At the bottom, there are 'Cancel', 'Previous', and 'Next' buttons.

The screenshot shows the 'Data Integration Hub' window with the 'PowerCenter Domain Settings' tab selected. On the left, a list of installation components is shown, with 'Processing Engines' highlighted. The main area contains a text box with instructions: 'Specify the Informatica domain, the administrator user account, and the PowerCenter Integration Service to run workflows.' Below this are five input fields: 'Domain name', 'Node name', 'Domain administrator username', 'Domain administrator password', and 'Integration Service name'. At the bottom, there are 'Cancel', 'Previous', and 'Next' buttons.

4. Enter values in the following fields:

**Domain name**

Name of the Informatica domain that contains the PowerCenter Integration Service that runs B2B Data Exchange workflows.

**Node name**

Node in the Informatica domain on which the PowerCenter Integration Service runs.

**Domain administrator username**

Name of the Informatica domain administrator.

**Domain administrator password**



Password for the Informatica domain administrator. B2B Data Exchange stores the password as an encrypted string.

**Integration Service name**

The name of the PowerCenter Integration Service that B2B Data Exchange uses to run workflows.

5. Click **Next**.

The **PowerCenter pmrep Command Line Utility Location** page appears.

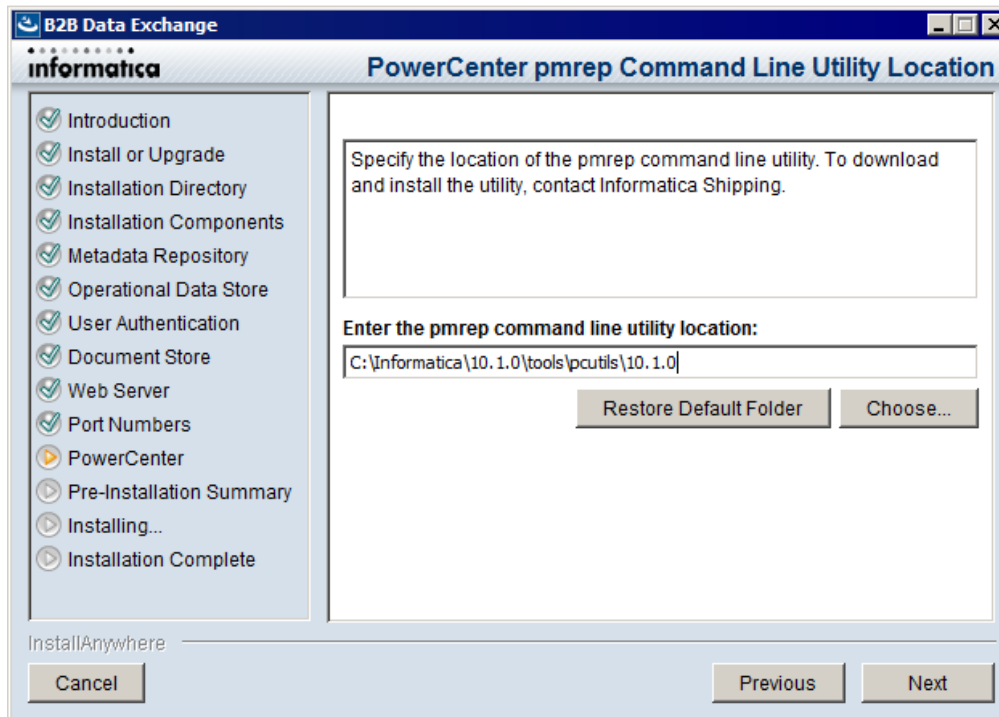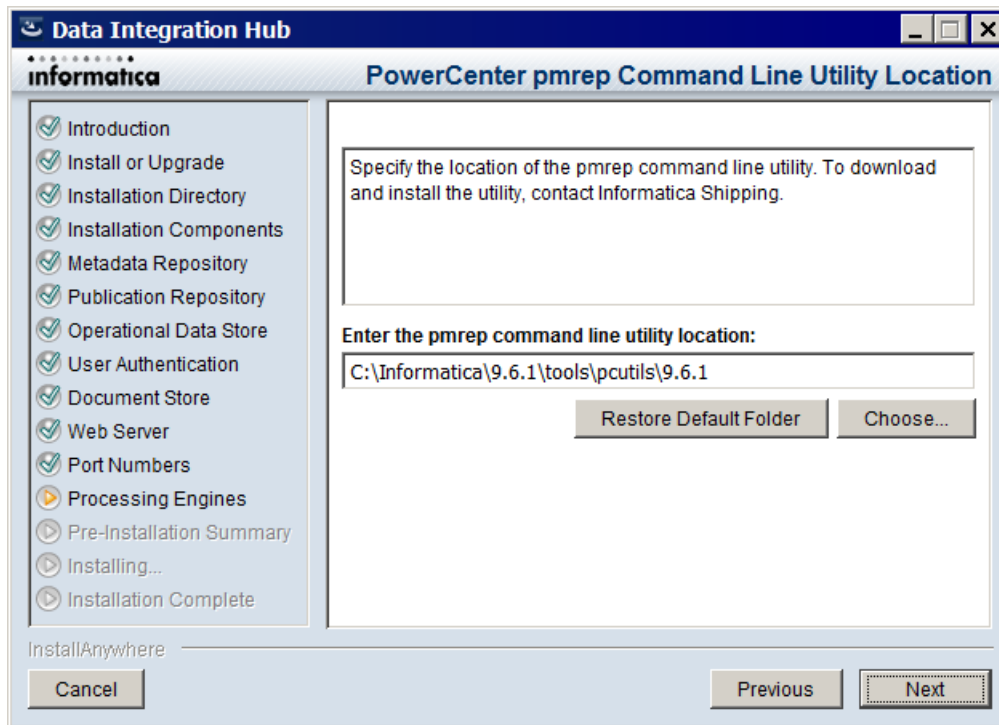

6. Specify the location of the pmrep command line utility.

The location of the utility depends on whether or not you install B2B Data Exchange on the machine where the PowerCenter services are installed.

Environment	Location of the pmrep command line utility
B2B Data Exchange installed on the machine where the PowerCenter services are installed	<pre data-bbox="776 401 1295 474">&lt;PowerCenter_services_installation_folder&gt; &lt;PowerCenter_version&gt;\tools\pcutils &lt;PowerCenter_version&gt;</pre>
B2B Data Exchange and PowerCenter services installed on different machines	<pre data-bbox="776 527 1369 600">&lt;PowerCenter_client_installation_folder&gt; &lt;PowerCenter_version&gt;\clients\PowerCenterClient client\bin</pre>

7. Click **Next**.

If you selected to install the B2B Data Exchange Informatica Data Quality component, the **Informatica Data Quality Domain Settings** page appears. If you did not select to install the B2B Data Exchange Informatica Data Quality component, the **Pre-Installation Summary** page appears.

## Step 8. Configure Informatica Data Quality Settings

1. If you selected to install the B2B Data Exchange Informatica Data Quality component, the **Informatica Data Quality Domain Settings** page appears.

The screenshot shows the 'Informatica Data Quality Domain Settings' window. The left-hand navigation pane lists the following steps, all of which are marked with a checkmark: Introduction, Install or Upgrade, Installation Directory, Installation Components, Metadata Repository, Publication Repository, Operational Data Store, User Authentication, Document Store, Web Server, Port Numbers, Processing Engines, Pre-Installation Summary, Installing..., and Installation Complete. The main content area contains a text box with the instruction: 'Specify the Informatica Data Quality domain, the administrator user account, and the Data Integration Service to run mappings.' Below this text box are eight input fields: 'Domain name', 'Host name', 'Port number', 'Domain administrator username', 'Domain administrator password', 'Security domain (optional)', 'Data Integration Service name', and 'Model Repository Service name'. At the bottom of the window, there are three buttons: 'Cancel', 'Previous', and 'Next'. The 'InstallAnywhere' logo is visible in the bottom left corner.

Enter values in the following fields:

**Domain name**

Domain name of the node on which the Data Integration Service runs.

**Host name**

Host name of the node on which the Data Integration Service runs.

**Port number**

Port number of the node on which the Data Integration Service runs.

**Domain administrator username**

User name for the node on which the Data Integration Service runs.

**Domain administrator password**

Password for the node on which the Data Integration Service runs.

**Security Domain**

Optional. Name of the Informatica security domain in which the Model Repository Service user is stored.

**Data Integration Service name**


Name of the Data Integration Service.

**Model Repository Service name**

Name of the Model Repository Service.

2. Click **Next**.

The **Informatica Data Quality infacmd Command Line Utility** page appears.

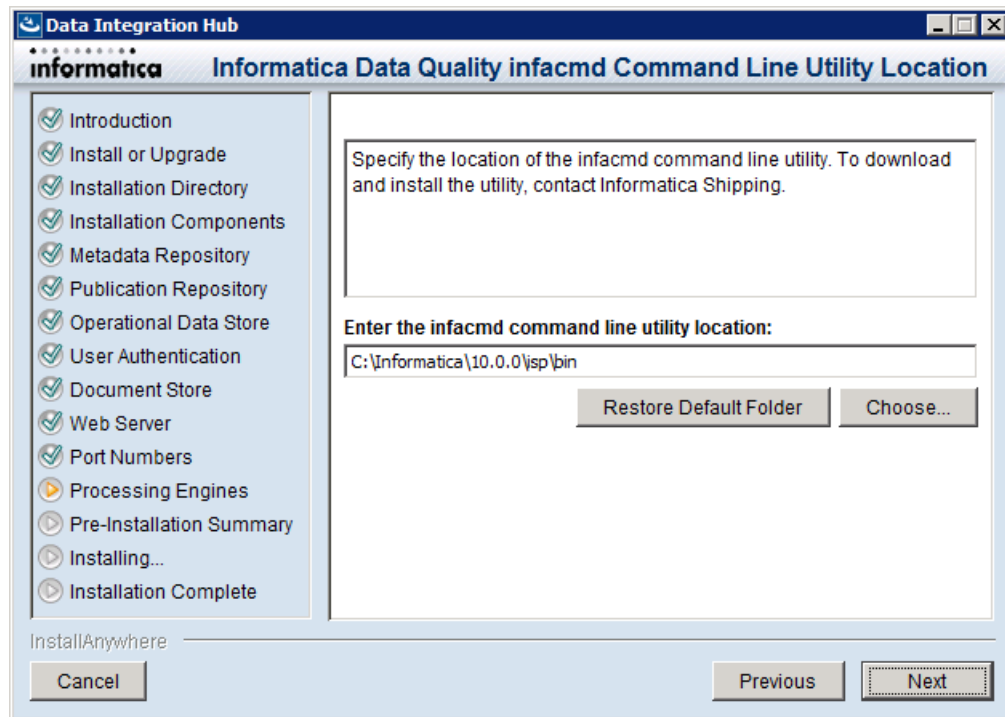


3. Enter the location of the infacmd command line utility or accept the default directory, and then click **Next**.

The **Pre-Installation Summary** page appears.

## Step 89. Complete the Installation

1. On the **Pre-Installation Summary** page, verify that the installation information is correct, and then click **Install**.

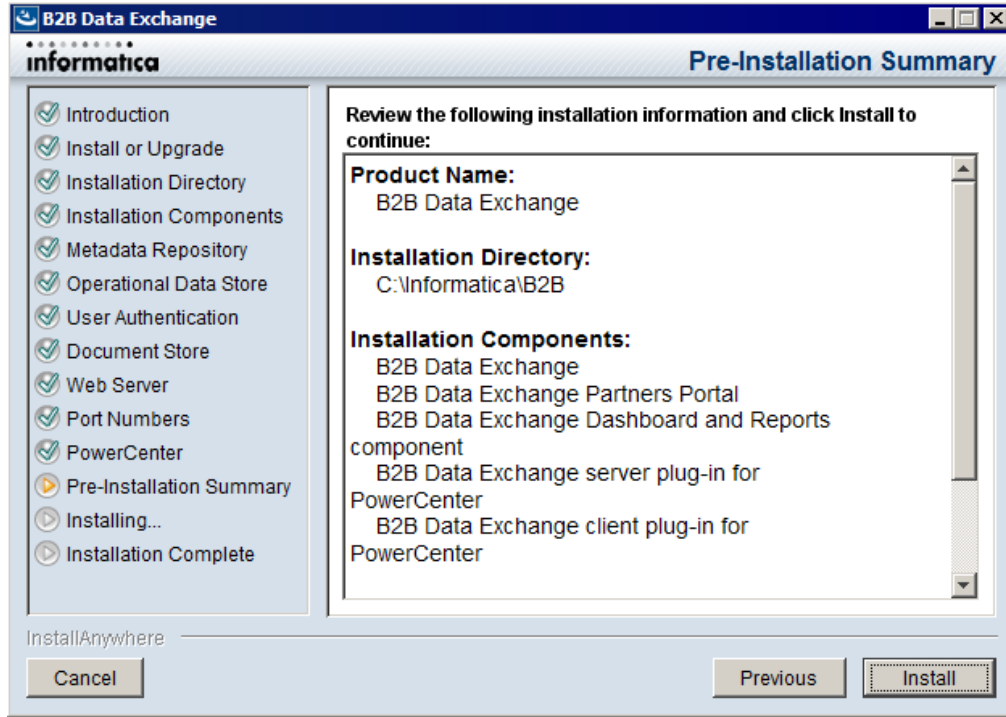

During the installation process, the installer displays progress information. When the installation process ends, the **Post-Installation Actions** page appears.

2. If you installed the B2B Data Exchange PowerCenter server plug-in, follow the wizard instructions to register the plug-in to the PowerCenter repository, and then click **Next**.

The **Installation Complete** page appears.

3. Click **Done** to close the installer.
4. To view the log files that the installer generates, navigate to the following directory:  
<DXInstallationDir>\logs.

5. Perform the required post-installation tasks.

For more information, see [Chapter 5, "Post-Installation Tasks" on page 68](#).

**Note:** Perform only the tasks that are relevant for your environment.

6. Optionally, perform additional configuration tasks. For more information, see [Chapter 9, "Optional B2B Data Exchange Configuration" on page 138](#).



# Installing B2B Data Exchange on a UNIX Operating System

Install B2B Data Exchange on UNIX operating systems in console mode. On Windows operating systems, install B2B Data Exchange in graphical mode.

Before you install, verify that your environment meets the minimum system requirements, perform the pre-installation tasks, and verify that the PowerCenter services are running.

During the installation, B2B Data Exchange saves log files in the home directory of the user, in the subdirectory named `DXLogs`. If the installation does not complete successfully, you can view the log files in this location.

## Step 1. Run the Installer

1. Log in to the machine with the user account that you want to use to install B2B Data Exchange.  
To prevent permission errors, use the same account to install B2B Data Exchange and PowerCenter.
2. Close all other applications.
3. Run `Install.bin -i console` from the root directory of the DVD or from the directory where you downloaded the installer.  
The **Introduction** section appears.
4. Read the instructions, and then press **Enter**.  
The **Install or Upgrade** section appears.
5. Enter **1** to install B2B Data Exchange, and then press **Enter**.  
The **Installation Directory** section appears.

## Step 2. Define Installation Settings

1. In the **Installation Directory** section, enter the absolute path to the installation directory or accept the default directory, and then press **Enter**.  
The **Installation Components** section appears and displays a numbered list of the components to install.
2. Enter a comma-separated list of numbers for the components to install or accept the default components:
  - 1- B2B Data Exchange**  
Installs the core B2B Data Exchange application.  
Selected by default.
  - 2- B2B Data Exchange Partners Portal**  
Installs the B2B Data Exchange Partners Portal component. You must install B2B Data Exchange to install the Partners Portal component.  
Selected by default.
  - 3-2- B2B Data Exchange Dashboard and Reports**  
Installs the B2B Data Exchange Dashboard and Reports component. You must install B2B Data Exchange to install the Dashboard and Reports component.  
Cleared by default.

**Note:**

- If you install the Dashboard and Reports component, you must import the operational data store event loader after you install B2B Data Exchange.
- If you install the Dashboard and Reports component, your B2B Data Exchange and operational data store repositories are installed on Microsoft SQL Servers, and you use PowerCenter version 10, you must configure the repository connections in PowerCenter Workflow Manager. For details, see [“Configuring Repository Connections on PowerCenter Version 10” on page 151](#).
- If you do not install the Dashboard and Reports component, the Dashboard will not be available in the Partners Portal.

**4-3- B2B Data Exchange Server Plug-in for PowerCenter**

Installs the B2B Data Exchange PowerCenter server plug-in component. After the installation, register the plug-in to the PowerCenter repository.  
Selected by default.

**4- B2B Data Exchange Hadoop Service**

Connecting module between B2B Data Exchange and the Hadoop cluster. Enables B2B Data Exchange to perform operations on the Hadoop publication repository.  
Select this component if you want to define a Hadoop-based publication repository and manage some of your topics on Hadoop.

**Note:** The B2B Data Exchange Hadoop Service must be installed on an edge node in the Hadoop cluster. Unless you are installing B2B Data Exchange on a Hadoop edge node, do not select this component during B2B Data Exchange installation. In this case, after you complete the B2B Data Exchange installation, run the installation again on the edge node and select to install only the B2B Data Exchange Hadoop Service component on the node.

**5- B2B Data Exchange Big Data Management/Informatica Data Quality**

Enables B2B Data Exchange to use Big Data Management and Data Quality mappings for custom publications and subscriptions.

Select this component if you want to create custom publications and subscriptions that use Big Data Management or Data Quality mappings in B2B Data Exchange.

3. Press **Enter**.  
The **Metadata Repository** section appears.

## Step 3. Configure B2B Data Exchange Repository Repositories

1. In the **Metadata Repository** section, enter the number for the metadata repository database configuration option or accept the default option:
  - 1- Create a B2B Data Exchange repository**  
Creates a repository in the database.
  - 1- Create a Data Integration Hub repository**  
Creates a repository in the database.
  - 2- Use an existing B2B Data Exchange repository**  
Uses the tables and data in an existing repository.
  - 2- Use an existing Data Integration Hub repository**  
Uses the tables and data in an existing repository.
2. Press **Enter**.

The **Metadata Repository Connection** section appears.

3. Enter 1 to use an Oracle database as the B2B Data Exchange metadata repository database.
4. Enter the number for the metadata repository database connection type or accept the default connection type:

#### 1- Database URL

Location of the database. If you select this option, enter values in the following fields:

- Database host name. Host name of the machine where the database server is installed.
- Database port number. Port number for the database. The default port number for Oracle is 1521. The default port for Microsoft SQL Server is 1433.
- Database SID. System identifier for the database.

#### 2- Custom Connection String

Connection string to the database. If you select this option, enter values in one of the following fields:

- JDBC string. JDBC connection string to the metadata repository.
- ODBC string. ODBC connection string to the metadata repository. Applicable if you install the PowerCenter client plug-in. The installer cannot verify the validity of the ODBC string.

**Note:** If you use a named Microsoft SQL Server database instance, you cannot connect to the database instance using the **Database URL** option. Use the **Custom Connection String** option.

For example:

```
jdbc:informatica:sqlserver://MYSQLSERVERCOMPUTERHOSTNAME  
\MYDBINSTANCENAME;DatabaseName=MYDATABASENAME;
```

5. Enter values in the following fields:

#### Database username

Name of the database user account for the Oracle database or the Microsoft SQL Server database.

#### Database user password

The password for the database account for the Oracle database or the Microsoft SQL Server database. B2B Data Exchange stores the password as an encrypted string.

6. Press **Enter**.

If you selected to install the B2B Data Exchange Dashboard and Reports component, the **Operational Data Store** section appears. If you did not select to install the Dashboard and Reports component, go to [“Step 5. Configure the Web Server Configure the Web Server and Port Numbers” on page 122.](#)

7. Enter the number for the publication repository connection type or accept the default connection type.

**Note:** When using Microsoft SQL Server named instances, you must define a custom connection string.

#### 1- Database URL

Location of the database. If you select this option, enter values in the following fields:

- Database host name. Host name of the machine where the database server is installed.
- Database port number. Port number for the database. The default port number for Oracle is 1521. The default port for Microsoft SQL Server is 1433.
- Oracle database: Database SID. System identifier for the database.
- Microsoft SQL Server database: Database name. Name of the database instance.

## 2- Custom Connection String

Connection string to the database. If you select this option, enter values in one of the following fields:

- JDBC string. JDBC connection string to the publication repository.
- ODBC string. Applicable if you install the PowerCenter client plug-in. ODBC connection string to the publication repository. The installer cannot verify the validity of the ODBC string.

**Note:** If you use a named Microsoft SQL Server database instance, you cannot connect to the database instance using the **Database URL** option. Use the **Custom Connection String** option.

For example:

```
jdbc:informatica:sqlserver://MYSQLSERVERCOMPUTERHOSTNAME  
\MYDBINSTANCENAME;DatabaseName=MYDATABASENAME;
```

8. Press **Enter**.
9. Enter values in the following fields:

### Database username

Name of the database user account for the Oracle database or the Microsoft SQL Server database.

### Database user password

The password for the database account for the Oracle database or the Microsoft SQL Server database. B2B Data Exchange stores the password as an encrypted string.

10. Press **Enter**.

If you selected to install the B2B Data Exchange Dashboard and Reports component, the **Operational Data Store** section appears. If you did not select to install the Dashboard and Reports component, go to [“Step 5. Configure the Web Server Configure the Web Server and Port Numbers” on page 122.](#)

## Step 4. Set Up the Operational Data Store

1. In the **Operational Data Store** section, enter the number for the database configuration option for the operational data store or accept the default option:

### 1- Create an operational data store repository

Creates an operational data store repository in the database.

### 2- Use an existing operational data store repository

Uses the tables and data in an existing operational data store repository.

2. Enter the number for the database connection type for the operational data store or accept the default connection type:

### 1- Database URL

Location of the database. If you select this option, enter values in the following fields:

- Database host name. Host name of the machine where the database server is installed.
- Database port number. Port number for the database. The default port number for Oracle is 1521. The default port for Microsoft SQL Server is 1433.
- Oracle database: Database SID. System identifier for the database.
- Microsoft SQL Server database: Database name. Name of the database instance.

## 2- Custom Connection String

Connection string to the database. If you select this option, enter values in one of the following fields:

- JDBC string. JDBC connection string to the Operational Data Store.
- If you install the PowerCenter client plug-in: ODBC string. ODBC connection string to the Operational Data Store. The installer cannot verify the validity of the ODBC string.

**Note:** If you use a named Microsoft SQL Server database instance, you cannot connect to the database instance using the **Database URL** option. Use the **Custom Connection String** option.

For example:

```
jdbc:informatica:sqlserver://MYSQLSERVERCOMPUTERHOSTNAME  
\MYDBINSTANCENAME;DatabaseName=MYDATABASENAME;
```

3. Enter values for the operational data store in the following fields:

### Database username

Name of the database user account for the Oracle database or the Microsoft SQL Server database.

### Database user password

The password for the database account for the Oracle database or the Microsoft SQL Server database. B2B Data Exchange stores the password as an encrypted string.

4. Press **Enter**.

The **User Authentication** section appears.

## Step 5. Configure User Authentication

1. In the **User Authentication** section, choose the type of user authentication that you want to use.

**Note:** If you select an existing repository, the installer selects the existing authentication method.

- Choose Informatica domain authentication to manage user credentials in the Informatica domain and synchronize user information with B2B Data Exchange. Use Informatica domain authentication for production environments. For more information, see [“Configure Settings for Informatica Domain Authentication” on page 62](#).

**Note:** If your Informatica domain uses Kerberos authentication, choose the option **Informatica domain with Kerberos authentication**.

- Choose Informatica domain with Kerberos authentication if your Informatica domain uses Kerberos authentication. Use Informatica domain with Kerberos authentication for production environments. For more information, see [“Configure Settings for Informatica Domain with Kerberos Authentication” on page 62](#).
- Choose **B2B Data Exchange native authentication** **Data Integration Hub native authentication** to manage user credentials locally in B2B Data Exchange. Use native authentication in development and staging environments. For more information, see [“Configure Settings for Data Integration Hub Native Authentication Configure Settings for B2B Data Exchange Native Authentication ” on page 63](#).

2. Press **Enter**.

The **Document Store** section appears.

## Configure Settings for Informatica Domain Authentication

If you choose Informatica domain authentication, enter values in the following fields:

### Gateway host

Host name of the Informatica security domain server. B2B Data Exchange stores the host name in the `pwc.domain.gateway` system property.

### Gateway port

Port number for the Informatica security domain gateway. B2B Data Exchange stores the port number in the `pwc.domain.gateway` system property. Use the gateway HTTP port number to connect to the domain from the PowerCenter Client. You cannot use the HTTPS port number to connect to the domain.

### Username

User name to access the Administrator tool. You must create the user in the Administrator tool and assign the **manage roles/groups/user** privilege to the user.

### Password

Password of the Informatica security domain user.

### Security domain

Name of the Informatica security domain where the user is defined.

### Security group

Optional. Security group within the Informatica security domain where B2B Data Exchange users are defined in the following format:

```
<security group>@<domain>
```

If you leave the field empty, the Informatica security domain synchronizes only the B2B Data Exchange administrator user account.

B2B Data Exchange stores the security group in the `dx.authentication.groups` system property in the following format:

```
<group name>@<security group>[;<groupname>@<security group>]
```

## Configure Settings for Informatica Domain with Kerberos Authentication

If you choose Informatica domain with Kerberos authentication, enter values in the following fields:

### Kerberos configuration file

File that stores Kerberos configuration information, usually named `krb5.conf`

The installation copies the file to the following location:

```
<DXInstallationDir>/shared/conf/security/krb5.conf
```

### Operation Console SPN name

Service Principal Name (SPN) for the B2B Data Exchange Operation Console.

B2B Data Exchange stores the SPN in the `dx-security-config.properties` property file, in the `dx.kerberos.console.service.principal.name` property.

### Operation Console keytab file

Location of the keytab file for the B2B Data Exchange Operation Console SPN.

The installation copies the file to the following location:

```
<DXInstallationDir>/shared/conf/security/HTTP_console.keytab
```

B2B Data Exchange stores the location of the keytab file in the `dx-security-config.properties` property file, in the `dx.kerberos.console.keytab.file` property.

If you change the property to point to a different file, you must enter the absolute path to the file using the following format:

```
file://<full_path>
```

#### System Administrator

B2B Data Exchange system administrator credentials.

Enter the credentials in the following format:

```
<username>@<SECURITY_DOMAIN>
```

**Note:** You must enter `<SECURITY_DOMAIN>` in uppercase letters.

#### Gateway host

PowerCenter domain gateway host.

#### Gateway port number

PowerCenter domain gateway port number.

#### Security group

Optional. Security group within the Informatica security domain where B2B Data Exchange users are defined in the following format:

```
<security_group>@<domain>
```

If you leave the field empty, the Informatica security domain synchronizes only the B2B Data Exchange administrator user account.

B2B Data Exchange stores the security group in the `dx.authentication.groups` system property in the following format:

```
<group name>@<security_group>[:<groupname>@<security_group>]
```

## Configure Settings for Data Integration Hub Native Authentication Configure Settings for B2B Data Exchange Native Authentication

If you choose **B2B Data Exchange native authentication** or **Data Integration Hub native authentication**, enter the B2B Data Exchange administrator user name. B2B Data Exchange uses this value for the user name and password when you log in to the Operation Console.

## Step 6. Configure Document Store and Web Server Configure Document Store, Web Server, and Port Numbers

1. In the **Document Store** section, enter the directory where B2B Data Exchange stores documents and files during processing or accept the default directory, and then press `Enter`.

The document store directory must be accessible to B2B Data Exchange, PowerCenter services, and Data Transformation.

2. Press `Enter`.

The **Web Server** section appears.

3. Configure the Web Server connection.

a. Enter the number for the network communication protocol or accept the default protocol:

**1- Enable HTTPS**

Instructs B2B Data Exchange to use secure network communication when you open the Operation Console in the browser.

If you select HTTPS and HTTP, the Operation Console switches existing HTTP connections with HTTPS connections.

**2- Enable HTTP**

Instructs B2B Data Exchange to use regular HTTP network communication when you open the Operation Console in the browser.

b. If you selected **Enable HTTPS**, enter values in the following fields:

**Connector port number**

Port number for the Tomcat connector to use when you open the Operation Console with HTTPS.

The default value is 18443.

**Use a keystore file generated by the installer**

Instructs the installer to generate a keystore file with an unregistered certificate. If you select this option, ignore the security warning that you receive from the browser the first time you open the Operation Console.

**Use an existing keystore file**

Instructs the installer to load an existing keystore file. Enter values in the following fields:

- Keystore password. Password for the keystore file.
- Keystore file. Path to the keystore file.

The keystore file must be in the Public Key Cryptography Standard (PKCS) #12 format.

c. If you selected **Enable HTTP**, enter values in the following fields:

**HTTP connector port number**

Port number for the HTTP connector. If you clear this field, your browser must connect to the B2B Data Exchange server with HTTPS when you log in to the Operation Console.

The default value is 18080.

**Server shutdown listener port number**

Port number for the listener that controls the Tomcat server shutdown.

The default value is 18005.

4. Press **Enter**.

The **Port Numbers** section appears.

5. Press **Enter**.

If you selected to install the B2B Data Exchange PowerCenter server plug-in or the B2B Data Exchange PowerCenter Client plug-in components, the **PowerCenter Location** section appears. If you did not select the PowerCenter server or client components, the **PowerCenter Web Services Hub** section appears.

6. Enter the port number for the B2B Data Exchange JMS Broker JMX listener port or accept the default port and then press **Enter**.

If you selected to install the B2B Data Exchange PowerCenter server plug-in or the B2B Data Exchange PowerCenter Client plug-in components, the **PowerCenter Location** section appears. If you did not select the PowerCenter server or client components, the **PowerCenter Web Services Hub** section appears.



## Step 7. Configure PowerCenter Settings

1. If you selected to install the B2B Data Exchange PowerCenter server plug-in or the B2B Data Exchange PowerCenter Client plug-in components, in the **PowerCenter Location** section, enter the directory where you installed PowerCenter or accept the default directory, and then press **Enter**.

The **PowerCenter Web Services** section appears.

2. In the **PowerCenter Web Services** section, press **Enter** to accept the default URL or enter the URL that the PowerCenter Web Services Hub uses when B2B Data Exchange transfers documents to PowerCenter for processing with batch workflows to process publication and subscription workflows and then press **Enter**.

3. Enter the name of the PowerCenter Repository Service, and then press **Enter**.

4. Enter values in the following fields:

**Node host name**

Host name of the node that runs the PowerCenter Repository Service.

**Node port number**

Port number of the node that runs the PowerCenter Repository Service.

**Username**

Name of the PowerCenter Repository Service user.

**Password**

Password for the PowerCenter Repository Service user. B2B Data Exchange stores the password as an encrypted string.

**Security domain**

Optional. Name of the Informatica security domain in which the PowerCenter Repository Service user is stored.

Default is Native.

5. Press **Enter**.

If you selected to install the B2B Data Exchange server plug-in for PowerCenter component, the **Informatica Domain PowerCenter Domain Settings** section appears. If you did not select the PowerCenter server component, the **PowerCenter pmrep Command Line Utility Location** section appears. Go to step [9](#).

6. Enter values in the following fields:

**Domain name**

Name of the Informatica domain that contains the PowerCenter Integration Service that runs B2B Data Exchange workflows.

**Node name**

Node in the Informatica domain on which the PowerCenter Integration Service runs.

**Domain administrator user name**

Name of the Informatica domain administrator.

**Domain administrator password**

Password for the Informatica domain administrator. B2B Data Exchange stores the password as an encrypted string.

7. Press **Enter**.

8. Enter the name of the PowerCenter Integration Service that B2B Data Exchange uses to run workflows, and then press **Enter**.
9. Enter the location of the pmrep command line utility and then press **Enter**. The location of the utility depends on whether or not you install B2B Data Exchange on the machine where the PowerCenter services are installed.

**Note:** On Linux operating systems, pmrep must be executable.

Environment	Location of the pmrep command line utility
B2B Data Exchange installed on the machine where the PowerCenter services are installed	<PowerCenter_services_installation_folder>/ <PowerCenter_version>/tools/pcutils/ <PowerCenter_version>
B2B Data Exchange and PowerCenter services installed on different machines	<PowerCenter_client_utility_directory>/PowerCenter/ server/bin

10. Press **Enter**.

The **Pre-Installation Summary** section appears. If you selected to install the B2B Data Exchange Big Data Management/Informatica Data Quality component, the **Big Data Management/Informatica Data Quality Domain name** section appears. If you did not select to install the B2B Data Exchange Big Data Management/Informatica Data Quality component, the **Pre-Installation Summary** section appears.

## Step 8. Complete the Installation

1. In the **Pre-Installation Summary** section, verify that the installation information is correct, and then press **Enter**.

During the installation process, the installer displays progress information.

2. If you installed the B2B Data Exchange PowerCenter server plug-in, follow the on-screen instructions to register the plug-in to the PowerCenter repository, and then press **Enter**.
3. To view the log files that the installer generates, navigate to the following directory:

```
<DXInstallationDir>\logs
```

4. Perform the required post-installation tasks.

For more information, see [Chapter 5, "Post-Installation Tasks" on page 68](#).

**Note:** Perform only the tasks that are relevant for your environment.

5. Optionally, perform additional configuration tasks. For more information, see [Chapter 9, "Optional B2B Data Exchange Configuration" on page 138](#).

## Step 8. Configure Processing Engine Settings

1. In the **Big Data Management/Informatica Data Quality Domain name** section, press **Enter** to accept the default domain name or enter the name of the Informatica domain, and then press **Enter**.

The **Big Data Management/Informatica Data Quality Host name** section appears.

2. Press **Enter** to accept the default host name or enter the host name of the node on which the Data Integration Service runs and then press **Enter**.

The **Big Data Management/Informatica Data Quality Port number** section appears.

3. Press **Enter** to accept the default port number or enter the port number of the node on which the Data Integration Service runs and then press **Enter**.  
The **Big Data Management/Informatica Data Quality administrator user name** section appears.
4. Press **Enter** to accept the default user name or enter the user name for the node on which the Data Integration Service runs and then press **Enter**.  
The **Big Data Management/Informatica Data Quality administrator password** section appears.
5. Press **Enter** to accept the default password or enter the password for the node on which the Data Integration Service runs and then press **Enter**.  
The **Big Data Management/Informatica Data Quality Security Domain** section appears.
6. Optionally, enter the name of the Informatica security domain in which the Model Repository Service user is stored. Press **Enter**.  
The **Big Data Management/Informatica Data Quality Data Integration Service name** section appears.
7. Press **Enter** to accept the default name or enter the name of the Data Integration Service and then press **Enter**.  
The **Big Data Management/Informatica Data Quality Model Repository Service name** section appears.
8. Press **Enter** to accept the default name or enter the name of the Model Repository Service and then press **Enter**.  
The **Big Data Management/Informatica Data Quality infacmd Command Line Utility Location** section appears.
9. Press **Enter** to accept the default location or enter the location of the infacmd command line utility then press **Enter**.  
The **Pre-Installation Summary** section appears.

## Step 9. Complete the Installation

1. In the **Pre-Installation Summary** section, verify that the installation information is correct, and then press **Enter**.  
During the installation process, the installer displays progress information.
2. If you installed the B2B Data Exchange PowerCenter server plug-in, follow the on-screen instructions to register the plug-in to the PowerCenter repository, and then press **Enter**.
3. To view the log files that the installer generates, navigate to the following directory:  
<DXInstallationDir>\logs
4. Perform the required post-installation tasks.  
For more information, see [Chapter 5, "Post-Installation Tasks" on page 68](#).  
**Note:** Perform only the tasks that are relevant for your environment.
5. Optionally, perform additional configuration tasks. For more information, see [Chapter 9, "Optional B2B Data Exchange Configuration" on page 138](#).

# CHAPTER 5

## Post-Installation Tasks

This chapter includes the following topics:

- [Post-Installation Tasks Overview, 68](#)
- [Configure Authentication for the Operation Console, 69](#)
- [Register the B2B Data Exchange Server Plug-in for PowerCenter, 70](#)
- [Connect to a Remote Informatica Domain, 71](#)
- [Set Up the Run Publication Subscription B2B Data Exchange Web Services, 73](#)
- [Configure Credentials for Windows Authentication, 74](#)
- [Set Up Database Partitions on the Publication Repository, 75](#)
- [Configuring the Environment for a Hadoop Publication Repository, 75](#)
- [Log in to the Operation Console, 77](#)
- [Configure Connections to the B2B Data Exchange Repositories, 78](#)
- [Configure the Mail Server, 79](#)
- [Synchronize B2B Data Exchange Users, 80](#)
- [Activate the Dashboard and Reports Component, 80](#)
- [Synchronize B2B Data Exchange Users, 82](#)
- [Customize the Partners Portal Logo, 82](#)

## Post-Installation Tasks Overview

After you install B2B Data Exchange, perform the steps that are relevant for your environment.

1. Configure authentication for the B2B Data Exchange Operation Console.
2. If you installed the B2B Data Exchange server plug-in for PowerCenter, register the plug-in to the PowerCenter repository.
3. Configure PowerCenter to access B2B Data Exchange.
4. If you do not have the Informatica services installed on the same machine as B2B Data Exchange, configure B2B Data Exchange to connect to a remote Informatica domain.
5. If you want to use the Run Publication Subscription web services API, set up the web services.
6. If you installed the B2B Data Exchange repositories on a Microsoft SQL Server and you selected to use Windows authentication, configure credentials for Windows authentication.

7. Set up partitions on the B2B Data Exchange publication repository database that stores published data sets. Setting up partitions is highly recommended.
8. Configure the mail server for B2B Data Exchange monitoring notifications.
9. If you installed the B2B Data Exchange Hadoop Service component, configure your environment for a Hadoop-based publication repository.
10. Start the B2B Data Exchange services. For more information, see [Chapter 8, “Starting and Stopping B2B Data Exchange” on page 136](#).

**Note:** If you installed the B2B Data Exchange Hadoop Service component on a different machine than the machine where you installed B2B Data Exchange, start the services on both machines. For more information, see [“Starting and Stopping B2B Data Exchange on UNIX” on page 137](#).

11. Log in to the B2B Data Exchange Operation Console.
12. Configure connections to the B2B Data Exchange repositories in the B2B Data Exchange Operation Console.
13. If you installed B2B Data Exchange with Informatica domain authentication or with Informatica domain with Kerberos authentication, synchronize B2B Data Exchange users in the B2B Data Exchange Operation Console.
14. If you installed the Dashboard and Reports component, activate the component.
15. If you installed the Partners Portal component, you can brand the portal with your organization logo.
16. If you want to configure subscriptions with the delivery option **Insert new rows and update changed rows**, and if the column values are expected to contain NULLs, you must configure the PowerCenter Integration Service property **Treat Null In Comparison Operators As** to `Low`.

#### RELATED TOPICS:

- [“Overview of Starting and Stopping B2B Data Exchange” on page 136](#)

## Configure Authentication for the Operation Console

When you install B2B Data Exchange, you choose native authentication or Informatica domain authentication. one of the following authentication options:

- Informatica domain authentication. You use the user name and password you entered in the **Informatica Platform Authentication** screen to log in to the Operation Console.
- Informatica domain with Kerberos authentication. You are automatically logged in to the Operation Console with your operating system credentials.
- B2B Data Exchange native authentication. You use the administrator user name you entered in the Operation Console Administrator screen to log in to the Operation Console.

If you choose native authentication, use the administrator user name you entered in the Operation Console Administrator screen to log in to the Operation Console. If you choose Informatica domain authentication, use the user name and password you entered in the **Informatica Platform Authentication** screen to log in to the Operation Console.

If you use B2B Data Exchange native authentication with an authentication protocol that the Informatica domain authentication does not support, you can create a JAAS login module to enable authentication for users that log in to the Operation Console. You configure the connection between the Operation Console and the JAAS login module. The login module must support storing the user principal in the JAAS shared state.

## Configure a JAAS Module for the Operation Console

If you use B2B Data Exchange native authentication, you can create a JAAS login module to connect to the authentication server before you configure authentication to the Operation Console.

For more information about the JAAS login module, browse to the following websites:

```
http://download.oracle.com/javase/6/docs/technotes/guides/security/jaas/
JAASRefGuide.html
http://download.oracle.com/javase/6/docs/technotes/guides/security/jaas/
JAASLMDevGuide.html
```

1. After you create the JAAS login module, copy the JAR file to the following directory:  
`<DXInstallationDir>/DataExchangeDataIntegrationHub/tomcat/shared/lib`

2. Go to the home directory of the user account that runs the instance of Apache Tomcat in B2B Data Exchange and locate the file named `dx-console.login.config`.

On Windows 7, the default user home directory is `C:\Username`. On Windows XP the default user home directory is `C:\Documents and Settings\UserName`. On UNIX systems, the default user home directory is `/home/UserName`. If the file does not exist, create a text file with the name `dx-security.login.config` in the following directory: `<DXInstallationDir>/DataExchangeDataIntegrationHub/tomcat/shared/classes/shared/conf/security`

3. Add the following lines of code to the file and specify the class name of the JAAS module and any options required:

```
DX-SECURITY {
  <Class_Name_of_Login_Module> REQUISITE;
};
```

4. Save the file.

## Register the B2B Data Exchange Server Plug-in for PowerCenter

If you installed the B2B Data Exchange server plug-in for PowerCenter, register the plug-in to the PowerCenter repository where you create B2B Data Exchange workflows. If you do not register the plug-in, you cannot create B2B Data Exchange transformations in the PowerCenter Designer, and B2B Data Exchange cannot run PowerCenter workflows. Under these conditions, when B2B Data Exchange attempts to run a PowerCenter workflow and fails, B2B Data Exchange logs the following error in the PowerCenter workflow session log:

```
[REP_12400 Repository Error ([REP_57140] Object does not exist).
```

The PowerCenter Repository Service must be running in exclusive mode when you register the plug-in. After the registration, restart the PowerCenter Repository Service in normal mode.

1. Log in to the Administration tool.
2. In the Navigator, select the Repository Service for which you want to register the plug-in.
3. On the Properties tab, edit the General Properties section and set the operating mode to Exclusive.
4. Restart the Repository Service.
5. After the Repository Service restarts, click the Plug-ins tab.
6. Click the link to register a Repository Service plug-in.
7. On the Register Plug-in for <Repository Service> page, click the **Browse** button to find the plug-in file.

Select the following file in the directory where you installed the B2B Data Exchange server plug-in for PowerCenter:

```
<DXInstallationDir>/powercenter/pluginVERSION/dxplugin.xml
```

**Note:** The B2B Data Exchange installer creates separate plug-in folders for each PowerCenter version. Make sure to select the plug-in folder for the PowerCenter version that you are using.

8. Enter the Repository Service administrator user name and password to log in to the repository.  
If the security group field appears, select the security group for the Repository Service administrator.
9. Click **OK**.  
The Repository Service registers the plug-in. Verify that the list of registered plug-ins for the Repository Service includes the B2B Data Exchange transformations.
10. On the Properties tab, edit the General Properties section and set the operating mode to Normal.
11. Restart the PowerCenter Integration Service.

## Connect to a Remote Informatica Domain

If you do not have the Informatica services installed on the same machine as B2B Data Exchange, you can configure B2B Data Exchange to connect to a remote Informatica domain.

Verify that you can access the machine that hosts B2B Data Exchange from the machine hosting the Informatica services.

Perform the following tasks to connect to a remote Informatica domain:

- Modify the B2B Data Exchange configuration files to explicitly use the host name of the machine where B2B Data Exchange is installed.
- Configure the remote domain to access B2B Data Exchange.
- Update the Java security file to allow remote access to B2B Data Exchange.

## Modify the B2B Data Exchange Host Name

Replace the default host name for the Operation Console with the actual name of the machine that hosts B2B Data Exchange.

Modify the host name information in the following files:

```
<DXInstallationDir>/conf/dx-configuration.properties  
<DXInstallationDir>/DataExchangeDataIntegrationHub/tomcat/shared/classes/dx-configuration.properties
```

Back up the files before you update them.

1. Go to the following directory and locate the file named dx-configuration.properties:

```
<DXInstallationDir>/conf/
```

2. Use a text editor to open the file.

3. Search for the following text:

```
dx.rmi.host=localhost
```

4. Replace **localhost** with the host name of the machine that hosts B2B Data Exchange.

```
dx.rmi.host=DXHostName
```

5. Save the dx-configuration.properties file.

B2B Data Exchange maintains two copies of the dx-configuration.properties. The contents of the files must be identical.

6. Copy the updated dx-configuration.properties file to the following directory:

```
<DXInstallationDir>/DataExchangeDataIntegrationHub/tomcat/shared/classes/
```

## Configuring a PowerCenter Integration Service to Access B2B Data Exchange

During the B2B Data Exchange installation or upgrade, you define a PowerCenter Integration Service that B2B Data Exchange uses to run workflows. If required, you can configure a different PowerCenter Integration Service to access B2B Data Exchange.

In the Java classpath for the PowerCenter Integration Service, add the path to the B2B Data Exchange class files.

1. Log in to the Administrator tool and select the PowerCenter Integration Service that runs the workflows for B2B Data Exchange.
2. On the **Processes** tab, edit the Java SDK ClassPath property and add the location of the B2B Data Exchange Java classes at the beginning of the ClassPath property:

```
<DXInstallationDir>/powercenter/lib/dx-client-powercenter-10.2.0.jar;  
<DXInstallationDir>/powercenter/lib/commons-logging-1.1.3.jar;  
<DXInstallationDir>/powercenter/lib/log4j-1.2.17.jar;  
<DXInstallationDir>/powercenter/lib/activemq-all-5.12.1.1.jar
```

**Note:** You can reference the libraries if the you can access the <DXInstallationDir> from PowerCenter, or you can copy the library files locally.

3. Add environment variables to the B2B Data Exchange console and server integration services.

Integration Service	Environment Variable
DX_CONSOLE_URL	rmi://<HostName>:<dx.tpm.rmi.port>
DX_SERVER_URL	rmi://<HostName>:<dx.rmi.port>

You can find the RMI port numbers for the console and server in the following location:

```
<DXInstallationDir>\conf\dx-configuration.properties
```

By default:

- dx.tpm.rmi.port: 18096
- dx.rmi.port: 18095

4. Save the changes.

## Configure Remote Access to B2B Data Exchange

Update the Java security file in PowerCenter to enable remote access to B2B Data Exchange.

1. Go to the PowerCenter installation directory on the remote machine and locate the files named java.policy and javaws.policy in the following directory:

```
<PowerCenterInstallationDirectory>\java\jre\lib\security
```

2. Back up the files before you modify them.
3. Use a text editor to open the java.policy and the javaws.policy files.



4. Search for the following text:

```
permission java.security.AllPermission;
```

If you do not find the text, add it to the list of permissions. To add to the list of permissions, add the permission to the end of the grant command before the closing bracket:

```
permission java.security.AllPermission;
```

5. If you modify the `java.policy` or the `javaws.policy` files, save the files.

## Set Up the Run Publication Subscription B2B Data Exchange Web Services

If you want to use the Run Publication Subscription web services API, import the web service workflows into PowerCenter.

If the PowerCenter services and the B2B Data Exchange server run on separate machines, verify that the settings for the B2B Data Exchange server are set correctly.

### Importing the Web Services to PowerCenter

When you install B2B Data Exchange, the B2B Data Exchange web services workflows are installed in the `<DX_INSTALLATION_DIR>/powercenter/webservices<DIH_InstallationDir>\powercenter\webservices` folder. You must import the B2B Data Exchange web service workflows into PowerCenter before you can access the web services.

To use the web services, the Informatica domain must contain the following services:

- PowerCenter Repository Service
- Web Services Hub
- PowerCenter Integration Service

1. Use the PowerCenter Repository Manager to import the following workflow files into the PowerCenter repository: `wf_m_DIH_WS_StartPublicationSubscription.xml`.

- `wf_m_DX_WS_TPM.XML`. Contains the workflows for the `DX_TPM_Partner`, `DX_TPM_Account`, and `DX_TPM_Profile` web services.
- `wf_m_DX_WS_Endpoint.XML`. Contains the workflow for the `DX_Endpoint` web service.

2. In the Web Services Hub console, verify that the B2B Data Exchange web services are correctly imported into PowerCenter. If the import process is successful, the list of valid services includes the B2B Data Exchange web services.

3. You can use the Try-It application in the Web Services Hub console to test the B2B Data Exchange web services. On the **XML Input** tab, enter the data into the SOAP message and click **Send**. To avoid authentication errors, do not use the **Form Input** page to test the B2B Data Exchange web service.

After you verify that the web services are working, you can create a client application to send requests to the web services.

## Verifying the Server Settings

If the PowerCenter services and the B2B Data Exchange server run on separate machines, verify that the settings for the B2B Data Exchange server and Operation Console are set correctly.

In the Informatica Administrator, select the PowerCenter Integration Service that runs B2B Data Exchange workflows. Verify the following environment variable settings:

Environment Variable	Value
DX_SERVER_URL	The RMI URL for B2B Data Exchange server. For example: <code>rmi://&lt;DXServerHostname&gt;:&lt;RMIPort&gt;/TSSARuntime rmi://&lt;DIHServerHostname&gt;:&lt;RMIPort&gt;/TSSARuntime</code> <b>Note:</b> <RMIPort> must match the <code>dx.rmi.port</code> parameter in the <code>dx-configuration.properties</code> file. The default port number is 18095.
DX_CONSOLE_URL	The RMI URL for the B2B Data Exchange Operation Console. For example: <code>rmi://&lt;DXServerHostname&gt;:&lt;RMIPort&gt;/PartnerManagementService</code> <b>Note:</b> <RMIPort> must match the <code>dx.tpm.rmi.port</code> parameter in the <code>dx-configuration.properties</code> file. The default port number is 18096.

## Configure Credentials for Windows Authentication

If you installed any of the B2B Data Exchange repositories on a Microsoft SQL Server and you selected to use Windows authentication, configure the credentials that B2B Data Exchange uses to access the Microsoft SQL Server instance.

Before you start the configuration process, verify that all B2B Data Exchange Windows services are stopped and that the B2B Data Exchange Operation Console and the B2B Data Exchange server are not running.

1. Access the Windows **Services** window.
2. Double-click the service **Informatica B2B Data Exchange Server version**.  
The B2B Data Exchange Server Properties window appears.
3. Select the **Log On** tab.
4. Select **This account**, click **Browse**, and then specify a user account in the **Select User** dialog box. When you are finished, click **OK**.
5. Type the password for the user account in **Password** and in **Confirm password**, and then click **OK**.
6. Repeat steps [2](#) through [5](#) for the service **Informatica B2B Data Exchange Console version**.

# Set Up Database Partitions on the Publication Repository

It is highly recommended that you set up partitions on the publication repository database that stores published data sets. Partitions divide the stored published data set according to creation date, where each partition stores data sets that all applications publish on a specific date. By default, the publication repository does not use partitions.

When you set up partitioning, B2B Data Exchange reduces fragmentation by deleting expired data sets and reducing the time of data set creation and data consumption. You can set up partitions on Oracle and Microsoft SQL Server databases.

Use the B2B Data Exchange repository utility command `enablePartitioning` to create and manage the partitions in the publication repository database. The partitions state appears in the `dih.staging.use.partitions.default` system property. For more information about the B2B Data Exchange repository utility see the *B2B Data Exchange Administrator Guide*.

If you switch between a partitioned database and a non-partitioned database, the change affects topics, publications, and subscriptions that you create after the switch. Therefore, it is recommended that you choose a partition state before you start to use B2B Data Exchange. To switch the partition state for existing topics, publications, or subscriptions, contact Informatica Global Customer Service.

## Configuring the Environment for a Hadoop Publication Repository

If you installed the B2B Data Exchange Hadoop Service component, configure the environment for a Hadoop publication repository.

To complete the task you perform the following actions:

1. Configure settings in the `dx-configuration.properties` file.
  2. Verify references in the `dih-hadoop-service.xml` file.
  3. Enable an option in Cloudera Manager.
1. On the machine where the B2B Data Exchange Hadoop Service is installed, use a text editor to open the `dx-configuration.properties` file from the following location:  
`<DXInstallationDir>/DataIntegrationHub/tomcat/shared/classes/`
  2. Set the properties in the following sections of the file and then save the file:

### HIVE settings

Property	Description
<code>dih.hadoop.hive.username</code>	User name for connecting to the Apache Hive server.
<code>dih.hadoop.hive.password</code>	Password of the user that connects to the Apache Hive server.

Property	Description
dih.hadoop.hive.url	<p>URL to the Apache Hive server in the following format:</p> <pre>jdbc:hive2://&lt;hostname&gt;:&lt;port&gt;/&lt;schema&gt;</pre> <p>Where:</p> <ul style="list-style-type: none"> <li>- <code>hostname</code> is the host name or IP number of the server.</li> <li>- <code>port</code> is the port number of the server. Default is 10000.</li> <li>- <code>schema</code> is the schema used with the Hive warehouse. Default is default. If the Hive warehouse uses a non default schema, set the property <code>dih.hadoop.service.warehouse.dir</code>.</li> </ul>
dih.hadoop.service.warehouse.dir	<p>Path to the Hive warehouse directory. Required if the Apache Hive server uses a non default schema. If the Apache Hive server uses a default schema, do not enter a value for this property.</p> <p>For example:</p> <pre>dih.hadoop.hive.username=hive dih.hadoop.hive.password=password dih.hadoop.hive.url=jdbc:hive2://hive_host:10000/ myschema dih.hadoop.service.warehouse.dir=/user/hive/ mydatawarehousedir</pre>

### SPARK settings

Property	Description
dih.hadoop.service.spark.version	<p>Apache Spark version. You can configure the version to be 1.3 or 1.2. Default is 1.3.</p>
dih.hadoop.service.spark.url	<p>Apache Spark URL.</p> <ul style="list-style-type: none"> <li>- If Apache Spark is running in YARN mode, use the default value: <code>dih.hadoop.service.spark.url=yarn</code></li> <li>- If Apache Spark is running in standalone mode, enter the URL in the following format: <code>spark://master_host:&lt;port_number&gt;</code></li> </ul> <p>Where:</p> <ul style="list-style-type: none"> <li>- <code>master_host</code> is the Master daemon which coordinates the operations of the Workers, which run the executors.</li> <li>- <code>&lt;port_number&gt;</code> is the port number of the Master daemon. Default is 7077.</li> </ul> <p>For example: <code>spark://Mymasterhost:7077</code></p> <p><b>Note:</b> The value you enter here must be identical to the value that is shown in the Spark console. By default, the Spark console is located at <code>http://&lt;host_name&gt;:18080</code>.</p>
dih.hadoop.service.spark.additional.args	<p>Additional arguments for running jobs.</p> <p>For example:</p> <pre>--executor-memory 20G --total-executor-cores 100</pre> <p>For a complete list of arguments see the Spark documentation.</p>

## KERBEROS settings

If the Hadoop cluster uses Kerberos authentication, configure the following settings:

Property	Description
dih.hadoop.principal	Kerberos principal name in the following format: <code>&lt;principal&gt;/&lt;domain&gt;@&lt;realm&gt;</code>
dih.hadoop.keytab.path	Location and name of the keytab file. For example: <code>dih.hadoop.principal=infa/admin@informatica.com</code> <code>dih.hadoop.keytab.path=/etc/security/keytabs/infa.keytab</code> <b>Note:</b> The file name does not have to be <code>infa.keytab</code> .

3. On the machine where the B2B Data Exchange Hadoop Service is installed, use a text editor to open the `dih-hadoop-service.xml` file from the following location:

```
<DXInstallationDir>/DataIntegrationHub/tomcat/conf/Catalina/localhost
```

4. Verify that the file contains the correct references to your Hadoop classpath configuration. By default, the file references a Cloudera VM configuration in the section `Cloudera VM - sample default configurations`.

The file also contains references to Cloudera Manager and to Hortonworks VM, in the following commented out sections: `Cloudera CDH - sample cloudera manager configurations` and `Hortonworks VM - sample default configurations`. If required, comment out the `Cloudera VM - sample default configurations` section and uncomment the section that is appropriate to your configuration.

5. In Cloudera Manager, enable the option **Bind NameNode to Wildcard Address** and then restart the HDFS service.

## Log in to the Operation Console

You log in to the Operation Console with the administrator user account that you defined during installation.

If you use Informatica platform authentication, verify that all user accounts and user passwords exist on the authentication server.

1. Make sure that the Operation Console service is running.
2. Access the Operation Console login page.
  - On Microsoft Windows or UNIX operating systems, open a browser window and enter the URL for the Operation Console in one of the following formats:

```
HTTP: http://<HostName>:<HTTPPortNumber>/
HTTPS: https://<HostName>:<HTTPSPortNumber>/
```
  - On Microsoft Windows operating systems, click the Desktop shortcut to open a new browser window to the Operation Console URL.
3. Enter your user name and password and click **Log In**.

# Configure Connections to the B2B Data Exchange Repositories

Configure connections to the B2B Data Exchange repositories. After you configure the connections, B2B Data Exchange creates the connections in the PowerCenter repository. B2B Data Exchange uses the connections details to create workflows for publications and for subscriptions, and to create data sources and data targets in PowerCenter .

To configure the connections, you must be logged in to the B2B Data Exchange Operation Console with the administrator user account.

1. In the Navigator, click **Hub Management > Connections**.  
The **Connections** page appears, showing the DIH\_\_REPO and DIH\_\_STAGING connections.
2. Click the **Edit** icon next to the DIH\_\_REPO connection.  
The **Edit Connection** page appears, showing the DIH\_\_REPO connection details. DIH\_\_REPO is the connection to the B2B Data Exchange metadata repository that you defined during installation.
3. Configure the **Database Name** if applicable and the **Data Access** properties of the connection. For more information, see the *B2B Data Exchange Administrator Guide*.
4. In the **Edit Connection** page, click **Save**.  
The **Edit Connection** page closes.
5. Click the **Test Connection** icon next to the DIH\_\_REPO connection.  
B2B Data Exchange tests the connection. The process might take a few moments.
6. When the message "Connection successful" shows, click **OK** in the **Test Connection** dialog box.  
**Note:** The first time that you test connections in B2B Data Exchange, the test might fail with an error. Wait one minute and then test the connection.  
If the test fails after you wait a few seconds, delete the folder `DIH__SYSTEM_WORKFLOWS` in PowerCenter, and then test the connection.
7. In the Navigator, click **Connections**.  
The **Connections** page appears.
8. Click the **Edit** icon next to the DIH\_\_STAGING connection.  
The **Edit Connection** page appears, showing the DIH\_\_STAGING connection details. DIH\_\_STAGING is the connection to the B2B Data Exchange publication repository that you defined during installation.
9. Repeat steps [3](#) through [6](#) to configure and test the DIH\_\_STAGING connection.
10. If you installed the B2B Data Exchange Hadoop Service component, click the **Edit** icon next to the DIH\_\_STAGING\_\_HADOOP connection.  
The **Edit Connection** page appears, showing the DIH\_\_STAGING\_\_HADOOP connection details. DIH\_\_STAGING\_\_HADOOP is the connection to the B2B Data Exchange Hadoop-based publication repository.
11. Configure the following Hadoop Settings properties of the connection:  
**Hadoop Cluster User**  
Name of the Hadoop cluster user account.

### NameNode URI

Use the following connection URI:

```
hdfs://<namenode>:<port>/<path>
```

Where

- <namenode> is the host name or IP address of the NameNode.
- <port> is the port on which NameNode listens for remote procedure calls (RPC).
- <path> is a working directory in HDFS. The Hadoop cluster user account must have full permissions to the working directory.

For example:

```
hdfs://mycluster:8020/user/claudera
```

**Note:** `hdfs://<namenode>:<port>` must be identical to property `fs.defaultFS` as it appears in the file `core-site.xml`.

### Hadoop Distribution

Type of Hadoop distribution that the Hadoop cluster uses.

12. In the **Edit Connection** page, click **Save**.  
The **Edit Connection** page closes.
13. Click the **Test Connection** icon next to the `DIH__STAGING__HADOOP` connection.  
B2B Data Exchange tests the connection. The process might take a few moments.
14. When the message "Connection successful" shows, click **OK** in the **Test Connection** dialog box.

## Configure the Mail Server

When you set up an event monitor in the Operation Console, you can specify that the B2B Data Exchange server sends email notifications to users in the organization when the conditions of the monitor are met, such as when an error occurs. You must configure a mail server to send email notifications.

**Note:** To invite partners to use the Partners Portal, you must set up the mail server.

To configure a mail server, edit the following B2B Data Exchange system properties:

System Property	Edit
<code>dx.smtp.server</code>	Replace <b>localhost</b> with the host name of the mail server.
<code>dx_email_from_field</code>	Replace the sample email address <b>noreply@example.com</b> with the return address for the email notification.
<code>dx.smtp.port</code>	Replace the default port <b>25</b> with the port of the mail server.
<code>dx.smtp.login</code>	Enter the user name for the mail server.
<code>dx.smtp.password</code>	Enter the password for the mail server. B2B Data Exchange stores the password as an encrypted string.
<code>dx.smtp.ssl</code>	If you use ssl (SMTPS) replace the default value <b>false</b> with <b>true</b> .

# Synchronize B2B Data Exchange Users

If you installed B2B Data Exchange with Informatica domain authentication or with Informatica domain with Kerberos authentication, synchronize B2B Data Exchange users in the B2B Data Exchange Operation Console.

To synchronize users in the Informatica security domain with B2B Data Exchange, the following conditions must be true:

- The Informatica security domain is configured on the **Security** page of Informatica Administrator.
- At least one security group in the Informatica security domain contains the B2B Data Exchange users to synchronize.
- The B2B Data Exchange system property `dx.authentication.groups` contains the list of groups from the Informatica security domain to synchronize, in the following format:  

```
<group name>@<security domain> [;<groupname>@<security domain>]
```
- One of the groups that are defined in `dx.authentication.groups` contains the user that performs the synchronization.
- The user that is defined in the B2B Data Exchange system property `pwc.repository.user.name` has privileges to manage users, groups, and roles.
- The B2B Data Exchange user has privileges to synchronize users.

1. In the Navigator, click **Administration > Users**.  
The **Users** page appears.
2. Click **Synchronize users** and follow the instructions on the screen.
3. For each user that is added to the **Users** page, assign the required privileges. For more information see the *B2B Data Exchange Administrator Guide*.

# Activate the Dashboard and Reports Component

If you installed the Dashboard and Reports component, perform the following tasks to activate the component:

- Register the license of the Dashboard and Reports component.
- Import the operational data store event loader to PowerCenter.

## Register the Dashboard and Reports License

Register the license of the B2B Data Exchange Dashboard and Reports component.

1. Contact Informatica Global Customer Support to receive the Logi Info Dashboard license files.
2. Start the B2B Data Exchange services.
3. Move the file `_Settings.lgx` from the following location:

```
<DXInstallationDir>\DataExchangeDataIntegrationHub\tomcat\webapps\dx-dashboard  
\_Definitions
```

To the following location:

```
<DXInstallationDir>\DataExchangeDataIntegrationHub\tomcat\shared\classes
```



Rename the file to the following name:

dx\_dashboard\_configuration.xml

4. Copy the Logi Info Dashboard license file `_Settings_encrypted.lgx` to the following location:

`<DXInstallationDir>\DataExchangeDataIntegrationHub\tomcat\webapps\dx-dashboard\_Definitions`

5. Rename the file `_Settings_encrypted.lgx` to `_Settings.lgx`.
6. Restart the B2B Data Exchange services.

To customize and enhance the Dashboard, the B2B Data Exchange developer installs and registers Logi Info Studio. For more information and installation instructions, see the *B2B Data Exchange Developer Guide*.

If the IP addresses of the machine that hosts B2B Data Exchange change any time after the installation, you must update the IP addresses in the Logi Info Dashboard license file. For more information, see [“Updating the Dashboard Configuration File” on page 150](#).

## Import the Operational Data Store Event Loader Workflow to PowerCenter

Import the operational data store (ODS) event loader workflow to load event information from the B2B Data Exchange repository to the B2B Data Exchange ODS.

If you use an existing workflow with the name `DX_ETL`, rename the existing workflow in PowerCenter Repository Manager before you import the ODS event loader workflow, or import the workflow to a different folder.

**Note:** After you import the ODS event loader workflow, do not run the workflow manually. The workflow must start at the scheduled time. If you start the workflow manually it might fail to store aggregated events in the B2B Data Exchange ODS.

1. In the PowerCenter Workflow Manager, select **Connections > Relational**.
2. Add the **DX\_REPO** connection for the B2B Data Exchange repository.
3. Add the **DX\_ODS** connection for the B2B Data Exchange ODS.
4. In the PowerCenter Repository Manager, import the B2B Data Exchange ODS workflow file. The name of the workflow file depends on type of database on which the ODS is installed.

Database Type	Workflow Location and Name
Oracle	<code>&lt;DXInstallationDir&gt;\powercenter\ETL\DX_ETL.xml</code>
Microsoft SQL Server	<code>&lt;DXInstallationDir&gt;\powercenter\ETL\DX_ETL_SQLSERVER.xml</code>

5. In the PowerCenter Workflow Manager, connect to the PowerCenter repository.
6. If B2B Data Exchange was previously installed at your site, and you want to exclude old events from the dashboard reports, instruct the workflow to load only events that finished processing after a specific date and time. Click **Workflow > Edit > Variables** and change the value of the **\$SWF\_Last\_Load\_End\_Time** variable.

**Note:** Do not change the variable after the first time the workflow runs.

7. By default, the workflow runs every 15 minutes. You can schedule the workflow start time.
8. Right-click the PowerCenter Integration Service that you want to assign to the ODS event loader workflow and select **Assign to Workflows**.

The **Assign Integration Service** dialog box appears.

9. Select the **DX\_ETL** check box and then click **Assign**.

PowerCenter assigns the Data Integration Service to the ODS event loader workflow.

## Synchronize B2B Data Exchange Users

If you installed B2B Data Exchange with Informatica domain authentication or with Informatica domain with Kerberos authentication, synchronize B2B Data Exchange users in the B2B Data Exchange Operation Console.

1. In the Navigator, click **Administration > Users**.

The **Users** page appears.

2. Click **Synchronize users** and follow the instructions on the screen.
3. For each user that is added to the **Users** page, assign the required privileges. For more information see the *B2B Data Exchange Administrator Guide*.

## Customize the Partners Portal Logo

If you installed the Partners Portal component, you can brand the Partners Portal with the organization logo.

The Partners Portal requires two logo graphic files in .png format, a small logo and a large logo. The file for the small logo must be named `Organization_logo.png` and must be 144 pixels by 50 pixels. The file for the large logo must be named `Login_Organization_logo.png` and must be 170 pixels by 100 pixels. The logo graphics must be transparent.

1. Copy the `Login_Organization_logo.png` file to the following directory: `dx\tomcat\webapps\dx-portal\img>Login_Organization_logo.png`.

This logo appears in the upper right corner of the Partners Portal login page.

2. Copy the `Organization_logo.png` file to the following directory: `dx\tomcat\webapps\dx-portal\img\Organization_logo.png`.

This logo appears in the upper right corner of the Partners Portal tabs.

## CHAPTER 6

# Installing the Partners Portal on Non-B2B Data Exchange Nodes

This chapter includes the following topics:

- [Installing the Partners Portal on Non-B2B Data Exchange Nodes Overview, 83](#)
- [Installing the Partners Portal on Non-B2B Data Exchange Nodes Requirements, 84](#)
- [Step 1. Install the Partners Portal, 85](#)
- [Step 2. Configure the Partners Portal Logo, 92](#)
- [Step 3. Set the Dashboard Properties, 93](#)

## Installing the Partners Portal on Non-B2B Data Exchange Nodes Overview

You can install the Partners Portal in your organization on a different node than the B2B Data Exchange node.

You can install the Partners Portal on Windows and UNIX operating systems. On Windows, run the B2B Data Exchange installer in graphical mode. On UNIX, run the B2B Data Exchange installer in console mode. When you run the installer, you must select only the **B2B Data Exchange Partners Portal** component.

Before you install, verify that your environment meets the installation requirements.

### Verify the Minimum System Requirements

Verify that your system meets the minimum requirements.

The following table describes the minimum system requirements:

System	Requirement
Operating system	<ul style="list-style-type: none"><li>- Microsoft Windows</li><li>- IBM AIX</li><li>- Sun Solaris</li><li>- Red Hat Linux</li><li>- SUSE Linux</li></ul>
Processor	2 CPU cores

System	Requirement
RAM	2 GB for the B2B Data Exchange Partners Portal
Disk space	3 GB
Browser	<ul style="list-style-type: none"> <li>- Microsoft Internet Explorer</li> <li>- Google Chrome</li> </ul>

The following table describes the minimum system requirements to run the installer:

System	Requirement
Operating system	X Window server if you run the installer on a UNIX operating system in graphical mode.
RAM	512 MB
Disk space	1 GB

For more information about product requirements and supported platforms, see the Product Availability Matrix on the Informatica My Support Portal: <https://mysupport.informatica.com/community/my-support/product-availability-matrices>

## Installation Process

The Partners Portal installation process consists of the following tasks:

1. Install the Partners Portal.  
Run the installer in graphical mode or in console mode to install the Partners Portal.
2. Optionally, configure the Partners Portal logo.

# Installing the Partners Portal on Non-B2B Data Exchange Nodes Requirements

Before you install the Partners Portal, set up the node to run the installer. If you plan to brand the portal with your organization logo, follow the logo branding guidelines.

### Partners Portal node

Follow these guidelines to set up the node where you plan to install the Partners Portal:

- B2B Data Exchange must be installed in the network.
- B2B Data Exchange and the Partners Portal must be deployed on the same operating system type.
- The Partners Portal requires file system level access to the B2B Data Exchange Document Store.
- Open HTTP or HTTPS ports from the external network to the node where you plan to install the Partners Portal. Configure the firewall to allow URLs that start with the suffix `/dx-portal` or `/dx-portal-help`.

## Logo branding

Follow these guidelines if you plan to brand the Partners Portal with the organization logo:

- The Partners Portal requires two graphic files for a small logo and a large logo in .png format.
- The file for the small logo must be named `Organization_logo.png` and must be 144 pixels by 50 pixels.
- The file for the large logo must be named `Login_Organization_logo.png` and must be 170 pixels by 100 pixels.
- The logo graphics must be transparent.

# Step 1. Install the Partners Portal

Based your operating system, install the Partners Portal in graphical mode or in console mode.


## Installing the Partners Portal on Windows in Graphical Mode

1. Log in to the machine with the user account that you want to use to install the Partners Portal.
2. Close all other applications.
3. Run the `Install.exe` installer file from the root directory of the DVD or from the directory where you downloaded the installer.

The **Introduction** page appears.


4. Read the instructions, and then click **Next**.

The **Install or Upgrade** page appears.

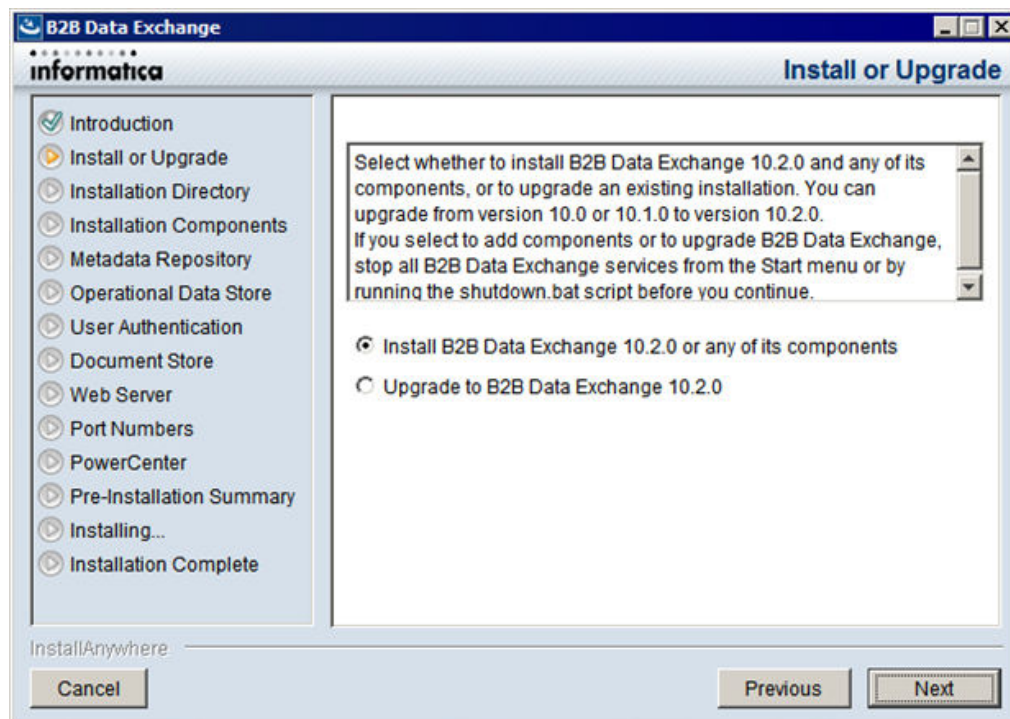

5. Select the option to install B2B Data Exchange, and then click **Next**.


The **Installation Directory** page appears.

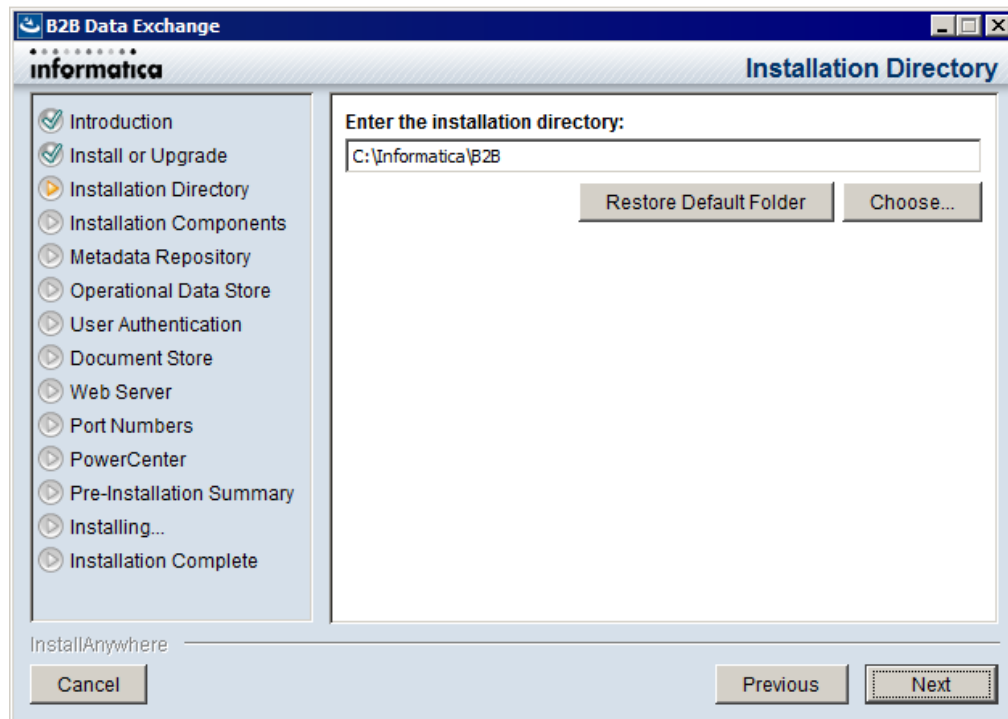

6. Enter the absolute path to the installation directory or accept the default directory.


7. Click **Next**.

The **Installation Components** page appears.

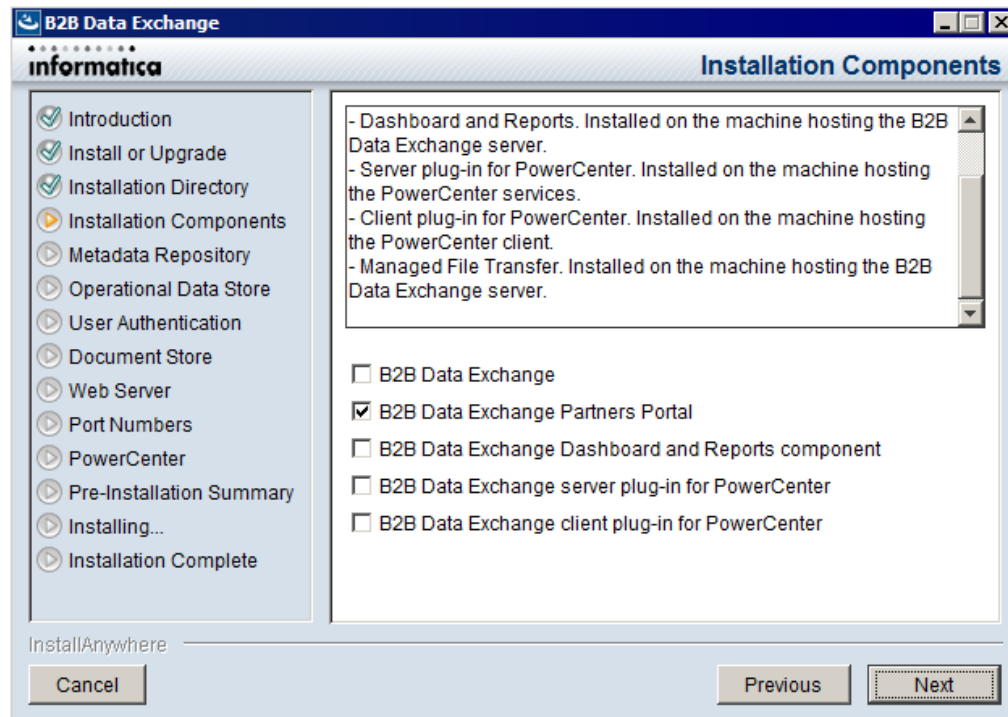

8. Select **B2B Data Exchange Partners Portal**, and then click **Next**.

The **Metadata Repository Connection** page appears.

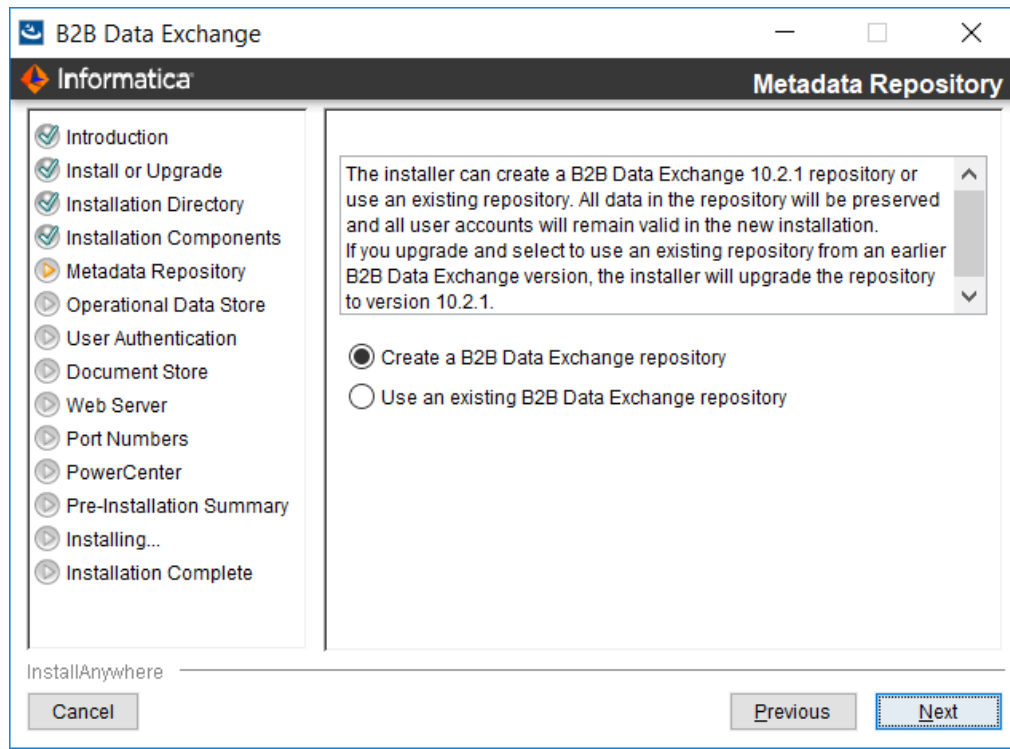

Select to use an existing repository.

9. Enter values in the following fields:

Field	Description
Database type	Type of database to use for the B2B Data Exchange metadata repository. You can choose one of the following options: <ul style="list-style-type: none"> <li>- Oracle</li> <li>- Microsoft SQL Server</li> </ul>
Database URL	Location of the database. If you select this option, enter the values in the following fields: <ul style="list-style-type: none"> <li>- Database host name. Host name of the machine where the database server is installed.</li> <li>- Database port. Port number for the database. The default port number for Oracle is 1521. The default port number for Microsoft SQL Server is 1433.</li> <li>- Oracle database. Database SID. System identifier for the database. Enter either a fully qualified ServiceName or a fully qualified SID.</li> </ul> <p><b>Note:</b> It is recommended that you enter a ServiceName in this field.</p> <ul style="list-style-type: none"> <li>- Microsoft SQL Server database. Database name.</li> </ul>


Field	Description
Custom Connection String	<p>Connection string to the database. If you select this option, enter values in one of the following fields:</p> <ul style="list-style-type: none"> <li>- JDBC string. JDBC connection string to the metadata repository.</li> <li>- ODBC string. ODBC connection string to the metadata repository. Available if you install the PowerCenter Client plug-in. The installer cannot verify the validity of the ODBC string.</li> </ul> <p><b>Note:</b> If you use a named Microsoft SQL Server database instance, you must specify a custom connection string. You cannot connect to the database instance with a database URL. For example,</p> <pre>jdbc:informatica:sqlserver://MYSQLSERVERCOMPUTERHOSTNAME \MYDBINSTANCENAME;DatabaseName=MYDATABASENAME;</pre>
Microsoft SQL Server database: Use Windows Authentication	Instructs B2B Data Exchange to authenticate user names against the Microsoft Windows authentication mechanism. Available when you select a Microsoft SQL Server database.
Oracle database or Microsoft SQL Server database where you do not use Windows authentication: Database username	Name of the database user account.
Oracle database or Microsoft SQL Server database where you do not use Windows authentication: Database user password	Password for the database account. B2B Data Exchange stores the password as an encrypted string.

**Note:** The values that you enter here must be identical to the values that you entered in this page during B2B Data Exchange installation.

10. Click **Next**.



The **Web Server** page appears.

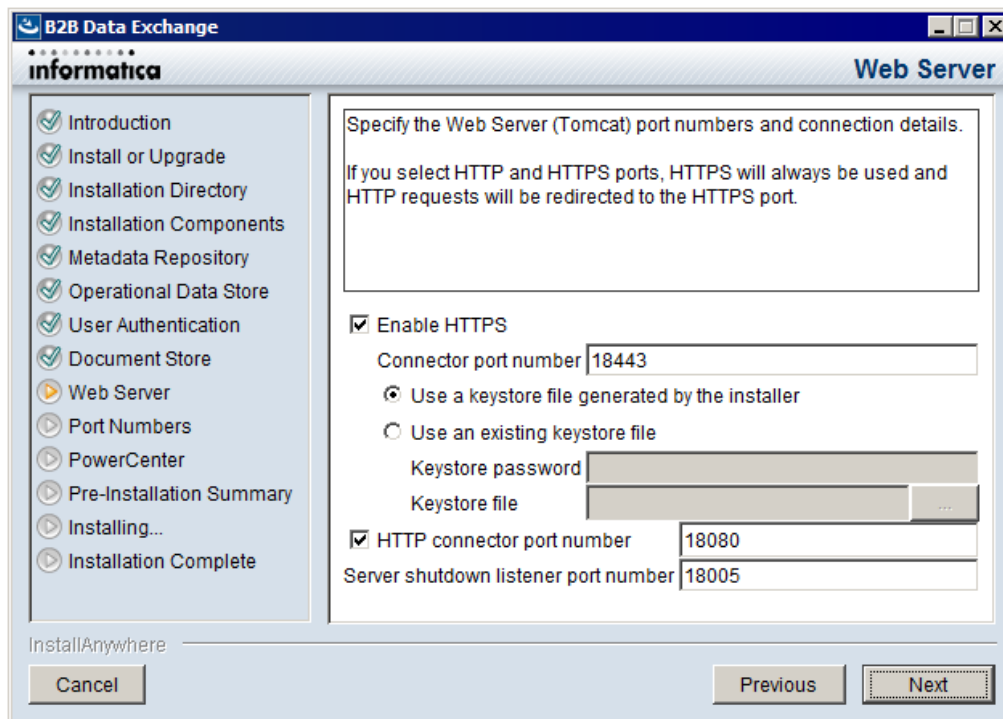


11. Enter values in the following fields:

Field	Description
Enable HTTPS	Instructs B2B Data Exchange to use secure network communication when you open the Operation Console in the browser. If you select HTTPS and HTTP, the Operation Console switches existing HTTP connections with HTTPS connections.
Connector port number	Port number for the Tomcat connector to use when you open the Partners Portal or Operation Console with HTTPS. The default value is 18443.
Use a keystore file generated by the installer	Instructs the installer to generate a keystore file with an unregistered certificate. If you select this option, ignore the security warning that you receive from the browser the first time you open the Operation Console.
Use an existing keystore file	Instructs the installer to load an existing keystore file. Enter values in the following fields: - Keystore password. Password for the keystore file. - Keystore file. Path to the keystore file. The keystore file must be in the Public Key Cryptography Standard (PKCS) #12 format.
HTTP connector port number	Port number for the HTTP connector. If you clear this field, your browser must connect to the B2B Data Exchange server with HTTPS when you log in to the Operation Console. The default value is 18080.
Server shutdown listener port number	Port number for the listener that controls the Tomcat server shutdown. The default value is 18005.

12. Click **Next**.

The **Pre-Installation Summary** page appears.

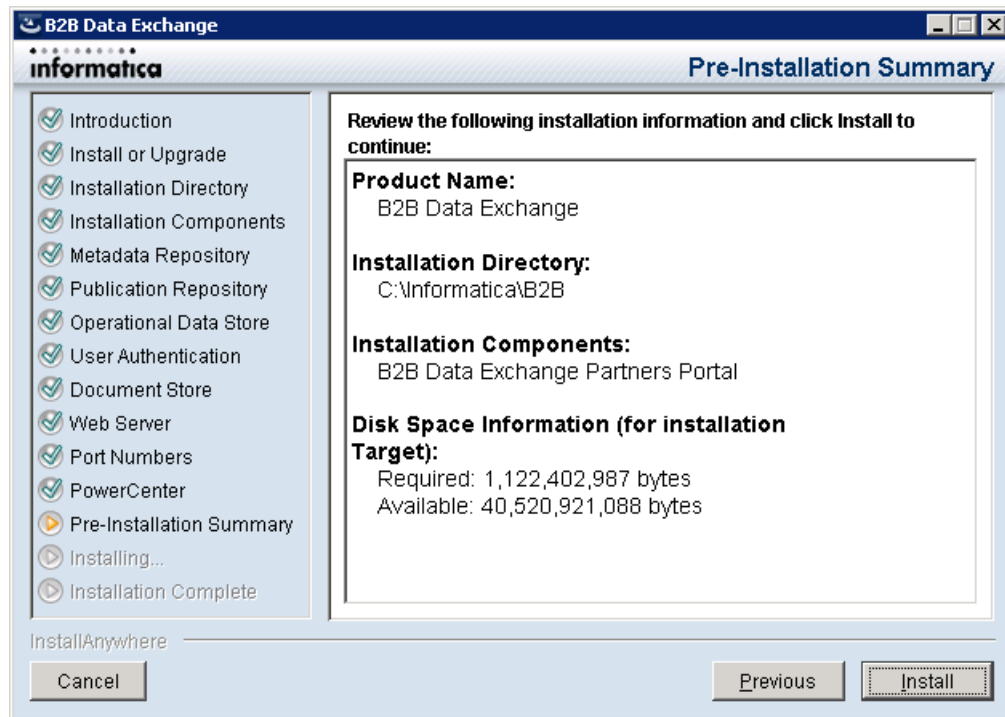

13. Verify that the installation information is correct, and then click **Install**.

During the installation process, the installer displays progress information. When the installation process ends, the **Installation Complete** page appears.

14. Click **Done** to close the installer.
15. To view the log files that the installer generates, navigate to the following directory:  
<DXInstallationDir>\logs.

## Installing the Partners Portal on UNIX in Console Mode

1. Log in to the machine with the user account that you want to use to install the Partners Portal.
2. Close all other applications.
3. Run the `Install.bin -i console` command.  
The **Introduction** section appears.
4. Read the installation instructions, and then press **Enter**.  
The **Install or Upgrade** section appears.
5. Select **1- Install B2B Data Exchange or any of its components**, and then press **Enter**.  
The **PowerCenter Version** section appears.
6. Select the PowerCenter version for which you want to install B2B Data Exchange, and then press **Enter**.  
The **Installation Directory** section appears.
7. Enter the absolute path to the installation directory or accept the default directory, and then press **Enter**.  
The **Installation Components** section appears and displays a numbered list of the components to install.
8. Select **2- B2B Data Exchange Partners Portal**, and then press **Enter**.  
The **Metadata Repository Connection** section appears.

9. Enter the number for the B2B Data Exchange metadata repository database type or accept the default database type:

Option	Description
1- Oracle	Oracle database.
2- Microsoft SQL Server	Microsoft SQL Server database.

10. Enter the number for the metadata repository database connection type or accept the default connection type.

Option	Description
1- Database URL	<p>Location of the database. If you select this option, enter values in the following fields:</p> <ul style="list-style-type: none"> <li>- Database host name. Host name of the machine where the database server is installed.</li> <li>- Database port number. Port number for the database. The default port number for Oracle is 1521. The default port for Microsoft SQL Server is 1433.</li> <li>- Oracle database. Database SID. System identifier for the database.</li> <li>- Microsoft SQL Server database. Database name. Name of the database instance.</li> </ul>
2- Custom Connection String	<p>Connection string to the database. If you select this option, enter values in one of the following fields:</p> <ul style="list-style-type: none"> <li>- JDBC string. JDBC connection string to the metadata repository.</li> <li>- If you install the PowerCenter client plug-in: ODBC string. ODBC connection string to the metadata repository. The installer cannot verify the validity of the ODBC string.</li> </ul> <p><b>Note:</b> If you use a named Microsoft SQL Server database instance, you must specify a custom connection string. You cannot connect to the database instance with a database URL. For example, <code>jdbc:informatica:sqlserver://MYSQLSERVERCOMPUTERHOSTNAME\MYDBINSTANCENAME;DatabaseName=MYDATABASENAME;</code></p>

**Note:** The values that you enter here must be identical to the values that you entered in this section during B2B Data Exchange installation.

11. Press **Enter**.

The **Web Server** section appears.

12. Configure the Web Server connection.

- a. Enter the number for the network communication protocol or accept the default protocol:

Option	Description
1- Enable HTTPS	<p>Instructs B2B Data Exchange to use secure network communication when you open the Operation Console in the browser.</p> <p>If you select HTTPS and HTTP, the Operation Console switches existing HTTP connections with HTTPS connections.</p>
2- Enable HTTP	<p>Instructs B2B Data Exchange to use regular HTTP network communication when you open the Operation Console in the browser.</p>

- b. If you selected **Enable HTTPS**, enter values in the following fields:

Field	Description
Connector port number	Port number for the Tomcat connector to use when you open the Operation Console with HTTPS. The default value is 18443.
Use a keystore file generated by the installer	Instructs the installer to generate a keystore file with an unregistered certificate. If you select this option, ignore the security warning that you receive from the browser the first time you open the Operation Console.
Use an existing keystore file	Instructs the installer to load an existing keystore file. Enter values in the following fields: <ul style="list-style-type: none"> <li>- Keystore password. Password for the keystore file.</li> <li>- Keystore file. Path to the keystore file.</li> </ul> The keystore file must be in the Public Key Cryptography Standard (PKCS) #12 format.

- c. If you selected **Enable HTTP**, enter values in the following fields:

Field	Description
HTTP connector port number	Port number for the HTTP connector. If you clear this field, your browser must connect to the B2B Data Exchange server with HTTPS when you log in to the Operation Console. The default value is 18080.
Server shutdown listener port number	Port number for the listener that controls the Tomcat server shutdown. The default value is 18005.

13. Click **Next**.  
The **Pre-Installation Summary** section appears.
14. Verify that the installation information is correct, and then press **Enter**.  
During the installation process, the installer displays progress information.
15. To view the log files that the installer generates, navigate to the following directory:  
<DXInstallationDir>\logs

## Step 2. Configure the Partners Portal Logo

1. Copy the `Login_Organization_logo.png` file to the following directory: `dx\tomcat\webapps\dx-portal\img\`.  
This logo appears in the upper right corner of the Partners Portal login page.
2. Copy the `Organization_logo.png` file to the following directory: `dx\tomcat\webapps\dx-portal\img\`.  
This logo appears in the upper right corner of the Partners Portal tabs.

## Step 3. Set the Dashboard Properties

When you install the Partners Portal with a stand-alone installation, set the Dashboard properties to ensure that you can view all the Dashboard charts in the Partners Portal.

1. Log in to the machine where you installed the Partners Portal.
2. Edit the following properties in the `dx-configuration.properties` file in the directory `\DX Installation directory\DataExchange\conf\`:

System Property	Description
<code>dx.dashboard.jdbc.username</code>	User name for the operational data store database.
<code>dx.dashboard.jdbc.password</code>	Password for the operational data store in an encrypted string database. If you change the password you must encrypt the string with the password encryption utility and use the encrypted string.
<code>dx.dashboard.jdbc.url</code>	Location of operational data store. The location must be different from the B2B Data Exchange repository.

3. Edit the same properties in the `dx-configuration.properties` file in the directory `\DX Installation directory\DataExchange\tomcat\shared\classes\`.

# CHAPTER 7

## Upgrading B2B Data Exchange

This chapter includes the following topics:

- [Upgrading B2B Data Exchange Overview, 94](#)
- [Before You Upgrade, 95](#)
- [Upgrading B2B Data Exchange on a Windows Operating System, 96](#)
- [Upgrading B2B Data Exchange on a UNIX Operating System, 118](#)
- [After You Upgrade, 126](#)

### Upgrading B2B Data Exchange Overview

You can upgrade the following versions of B2B Data Exchange directly to the latest version:

- B2B Data Exchange 10.0
- B2B Data Exchange 10.1
- B2B Data Exchange 10.1
- B2B Data Exchange 10.1.1

When you upgrade B2B Data Exchange, the installer backs up the files of the previous version of B2B Data Exchange and installs the new version. If the document store is found under the B2B Data Exchange Installation folder, you must move the document store to its original location after the upgrade process completes and before you start the DX service. You can create a new repository for the new version or you can use the existing repository. If you use the repository from the previous version, the installer upgrades the repository to the latest version. When you upgrade the B2B Data Exchange repository, you cannot change the database server type and server location.

Before you start the upgrade process, perform the procedures that are described in [“Before You Upgrade” on page 95](#). Then run the B2B Data Exchange installer. After the upgrade, perform the procedures that are described in [“After You Upgrade” on page 126](#).

For more information about the B2B Data Exchange configuration that you can perform after you upgrade, see [Chapter 4, “B2B Data Exchange Installation” on page 22](#).

**Note:** During the upgrade you cannot change the user authentication method that B2B Data Exchange uses. To change the user authentication method you must first upgrade the system and then switch to the required authentication method. For information about switching between authentication methods see the *B2B Data Exchange Administrator Guide*.

# Before You Upgrade

To prepare for the upgrade, perform the following tasks:

1. Verify that you have the user names and passwords for the required database accounts.
2. Verify that no publications or subscriptions are running and that all events are in a Final state.  
**Tip:** You can view the state of all events in the B2B Data Exchange Operation Console, on the **Event List** page.
3. Ensure that the all topics are in a Valid status.  
**Tip:** You can view the status of all topics in the B2B Data Exchange Operation Console, on the **Topics** page.
4. Ensure that the retention management job is not running. If the retention management job is running, you will see an incomplete System Event for the retention management job.  
**Note:** If the publication repository is used by applications other than B2B Data Exchange, you might lose data in the tables that are not managed by B2B Data Exchange when the upgrade is complete.
5. Ensure that the `dx.endpoint.file.prefix` property is empty.  
**Note:** This property is the landing zone path. Earlier releases of Data Integration Hub do not support this property. If this property value is not empty, then set it to an empty value.
6. Stop all B2B Data Exchange services. The B2B Data Exchange upgrade modifies the B2B Data Exchange files. The installer cannot proceed if the files are in use.  
**Note:** If the B2B Data Exchange Hadoop Service component is installed on a different machine than the machine where you installed B2B Data Exchange, stop the services on both machines. For more information, see [“Starting and Stopping B2B Data Exchange on UNIX” on page 137](#).
7. Stop all PowerCenter workflows that process B2B Data Exchange documents. In PowerCenter, stop all workflows that process B2B Data Exchange documents. Do not start the workflows again until the upgrade is complete.
8. Unschedule all custom workflows in PowerCenter. In PowerCenter, unschedule all custom workflows and verify that they do not run until the upgrade is complete.
9. Back up the B2B Data Exchange repository to be upgraded. Use the database server backup utility to back up the repository. This ensures that you can recover from any errors that you encounter during the upgrade.
10. Back up the B2B Data Exchange publication repository to be upgraded. Use the database server backup utility to back up the repository. This ensures that you can recover from any errors that you encounter during the upgrade.
11. Back up the existing B2B Data Exchange installation folder. Perform this action to help ensure that you can recover from any errors encountered during the upgrade, and that, after the upgrade, you can reapply modifications that were made to the configuration in previous versions.
12. If the PowerCenter services are not installed on the same machine where B2B Data Exchange is installed and you have upgraded the pmrep command line utility after you installed the previous version of B2B Data Exchange, clean up all CNX files from the `Temp` folder on your root directory.
13. If the Partners Portal was not installed on your system in previous versions and you want to install the portal when you upgrade to the new version, open ports to the portal in your firewall.

## Opening Ports to the Partners Portal

If you want to install the Partners Portal, enable access to the portal in the firewall by opening the HTTP or HTTPS ports from the external network to the Portal server.

Configure the firewall to allow URLs that start with the suffix `/dx-portal` and `/dx-portal-help` only.

To ensure that outside access to the Partners Portal is securely performed, assign the external hostname URL for the portal to the `dx.portal.url` system property. For more information about configuring system properties in the B2B Data Exchange Operation Console, see the *B2B Data Exchange Administrator Guide*.

## Upgrading B2B Data Exchange on a Windows Operating System

Upgrade B2B Data Exchange on Windows operating systems in graphical mode. On UNIX operating systems, upgrade B2B Data Exchange in console mode.

Before you install, verify that your environment meets the minimum system requirements, perform the pre-installation tasks, and verify that the PowerCenter services are running.



**Note:** During the upgrade, B2B Data Exchange saves log files in the home directory of the user in the subdirectory named `DXLogs`. If the upgrade does not complete successfully, you can view the log files in this location.

### Step 1. Run the Installer

1. Log in to the machine with the user account that you want to use to install B2B Data Exchange.  
To prevent permission errors, use the same account to install B2B Data Exchange and PowerCenter.
2. Close all other applications.
3. Run `Install.exe` from the root directory of the DVD or from the directory where you downloaded the installer.  
The **Introduction** page appears.
4. Read the instructions, and then click **Next**.





The **Install or Upgrade** page appears.

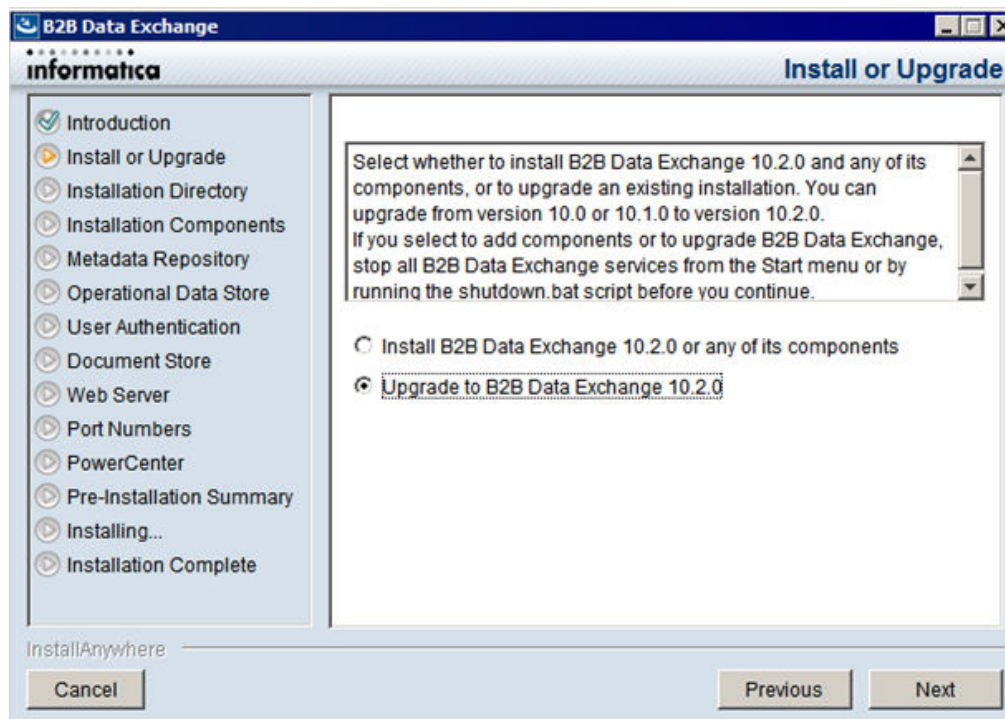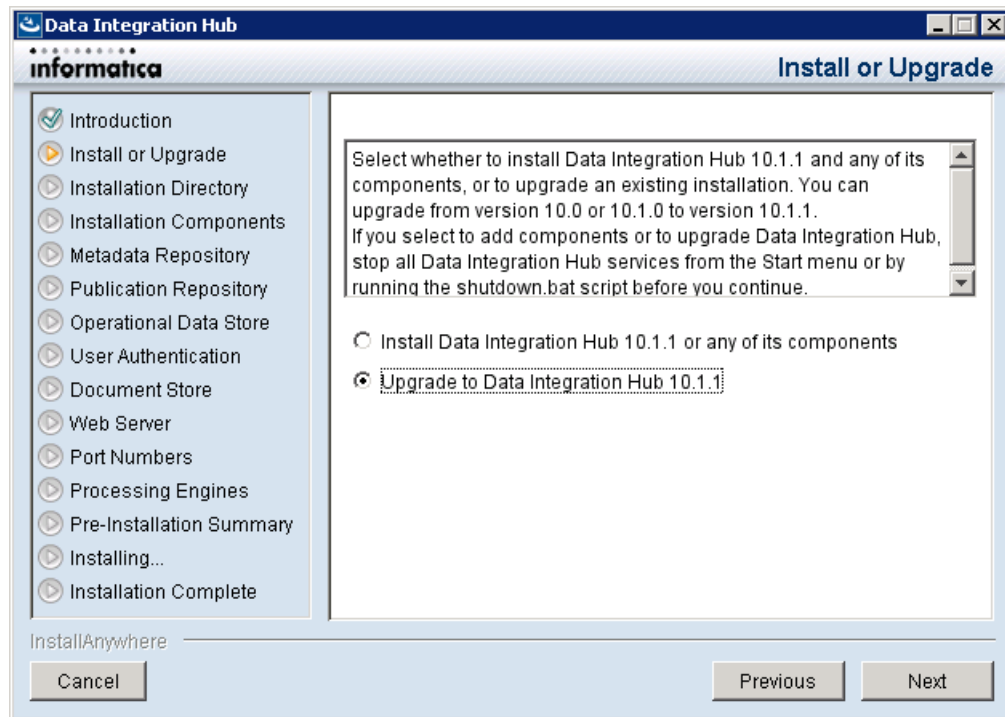

5. Select the option to upgrade B2B Data Exchange, and then click **Next**.  
The **Installation Directory** page appears.

## Step 2. Define Installation Settings



1. On the **Installation Directory** page, enter the absolute path to the installation directory or accept the default directory.

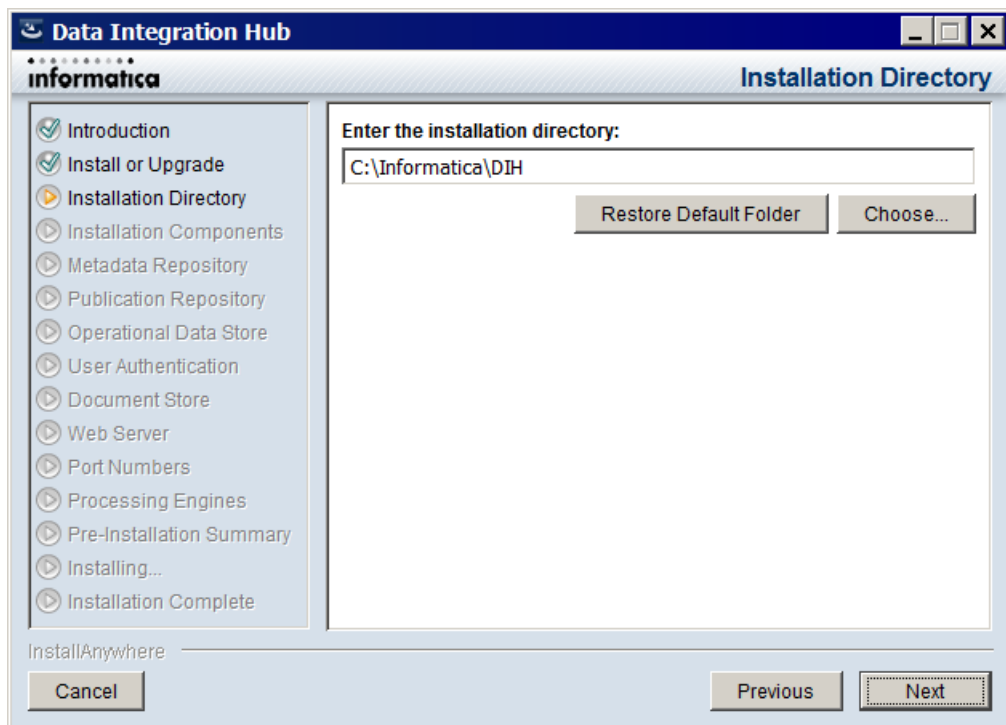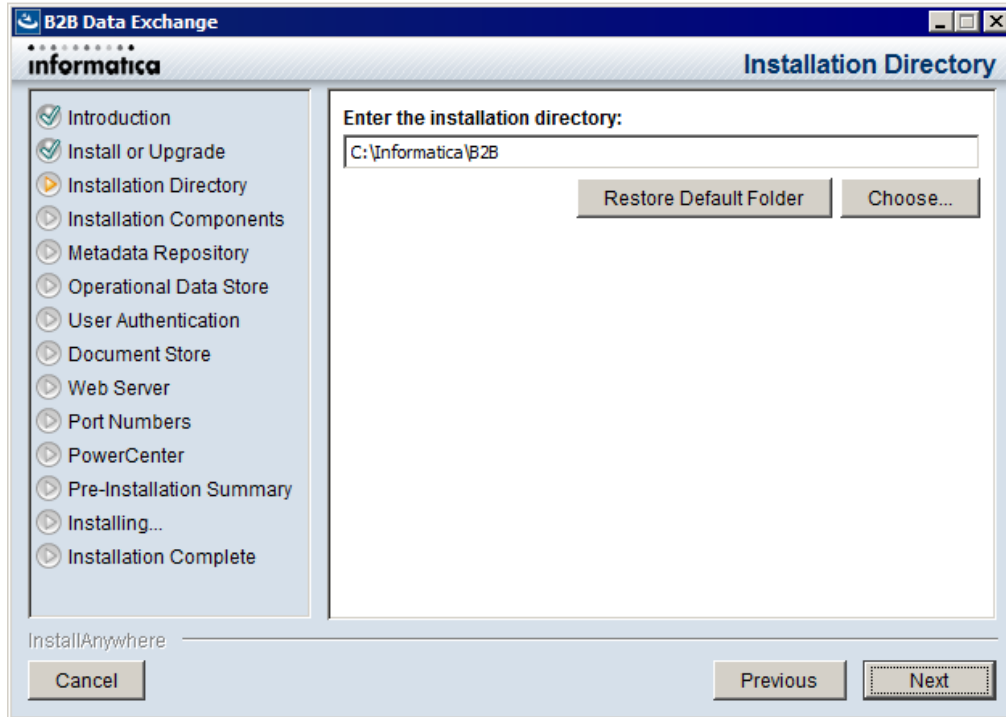

**Note:** You must select the same installation directory where you installed the previous B2B Data Exchange version.

2. Click **Next**.

The **Installation Components** page appears.

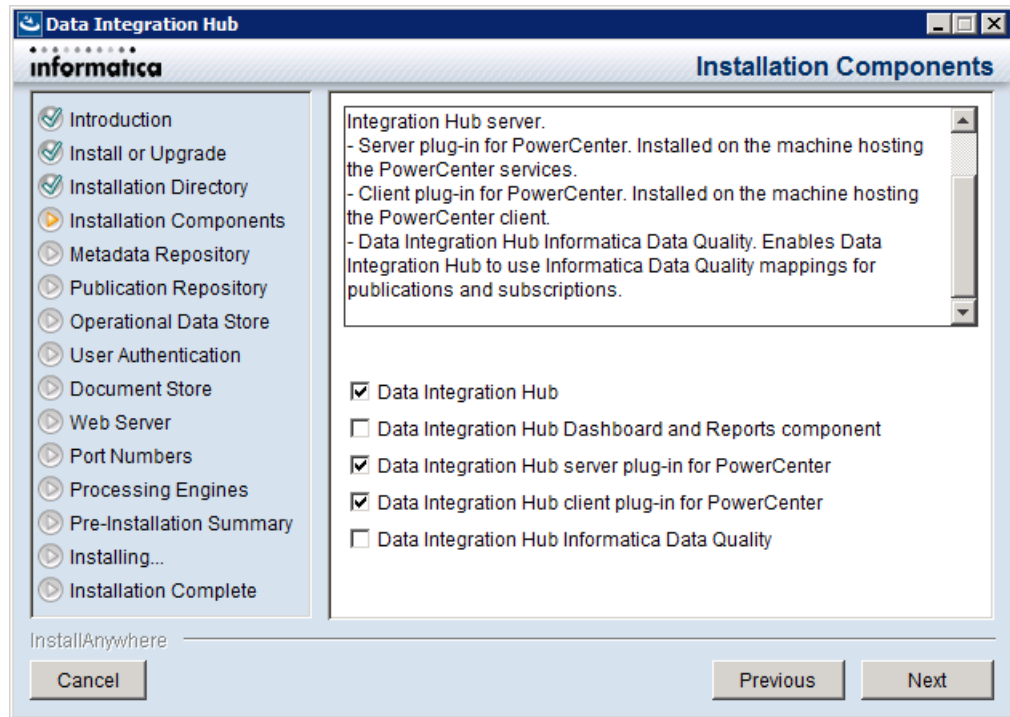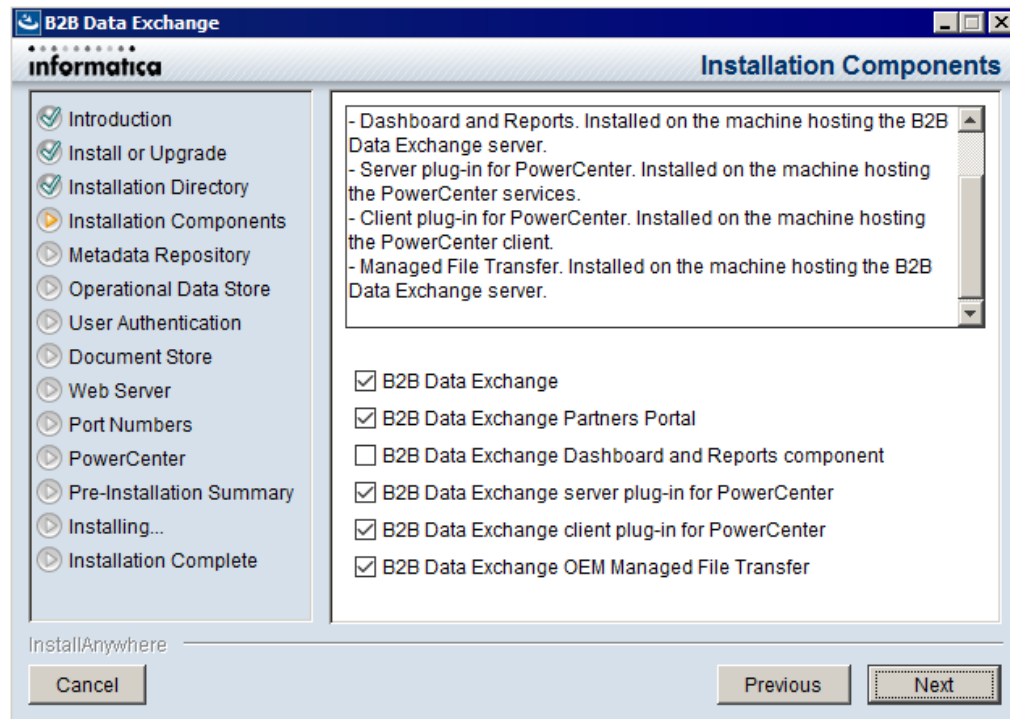

3. Select the components to install:

**B2B Data Exchange**

Installs the core B2B Data Exchange application.  
Selected by default.

**B2B Data Exchange Partners Portal**

Installs the B2B Data Exchange Partners Portal component. You must install B2B Data Exchange to install the Partners Portal component.  
Selected by default.

**B2B Data Exchange Dashboard and Reports**

Installs the B2B Data Exchange Dashboard and Reports component. You must install B2B Data Exchange to install the Dashboard and Reports component.  
Cleared by default.

**Note:**

- If you install the Dashboard and Reports component, you must import the operational data store event loader after you install B2B Data Exchange.
- If you install the Dashboard and Reports component, your B2B Data Exchange and operational data store repositories are installed on Microsoft SQL Servers, and you use PowerCenter version 10, you must configure the repository connections in PowerCenter Workflow Manager. For details, see [“Configuring Repository Connections on PowerCenter Version 10” on page 151](#).
- If you do not install the Dashboard and Reports component, the Dashboard will not be available in the Partners Portal.

**B2B Data Exchange PowerCenter server plug-in**

Installs the B2B Data Exchange plug-in for the PowerCenter services. After the installation, you register the plug-in to the PowerCenter repository.  
Selected by default.

**B2B Data Exchange PowerCenter client plug-in**

Installs the B2B Data Exchange plug-in for the PowerCenter Client. Install this component on every machine that runs the PowerCenter Client.  
Selected by default.

**B2B Data Exchange Informatica Data Quality**

Enables B2B Data Exchange to use Data Quality mappings for custom publications and subscriptions.

Select this component if you want to create custom publications and subscriptions that use Data Quality mappings in B2B Data Exchange.

Cleared by default.

**B2B Data Exchange OEM Managed File Transfer**

Adds the OEM Managed File Transfer component to B2B Data Exchange. You must install B2B Data Exchange to install the OEM Managed File Transfer component.  
Selected by default.

**4. Click Next.**



The **Metadata Repository** page appears.

## Step 3. Configure B2B Data Exchange Repositories Repository

1. On the **Metadata Repository** page, select one of the following options:

- **Create a B2B Data Exchange repository.** Creates a repository in the database.
- **Create a Data Integration Hub repository.** Creates a repository in the database.
- **Use an existing B2B Data Exchange repository.** Uses the tables and data in an existing B2B Data Exchange repository and upgrades the repository.

- **Use an existing Data Integration Hub repository.** Uses the tables and data in an existing B2B Data Exchange repository and upgrades the repository.

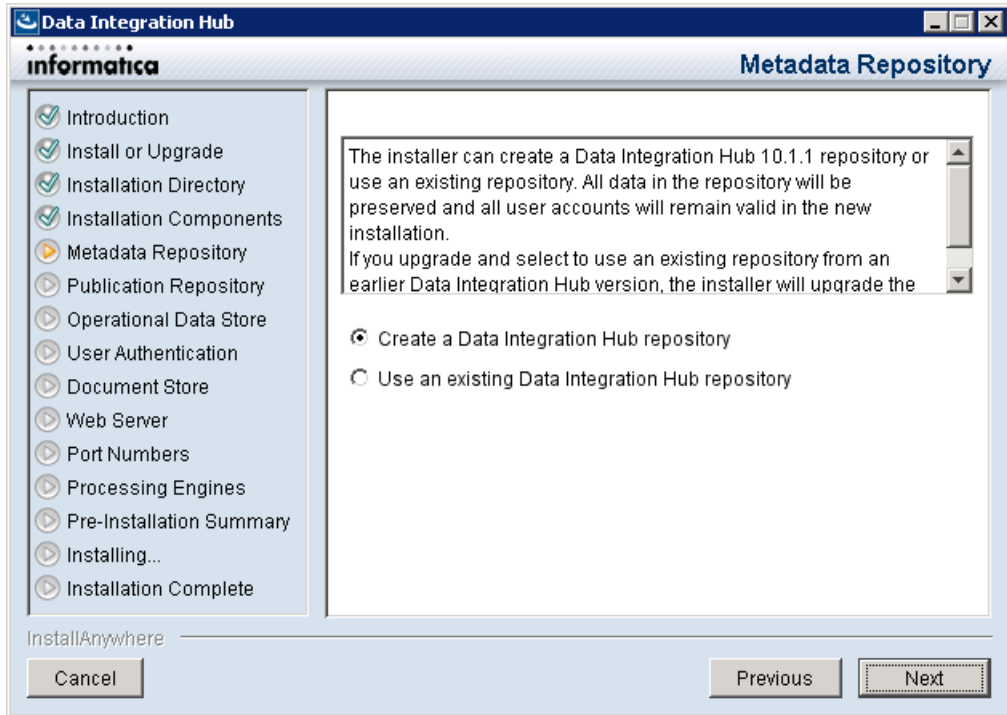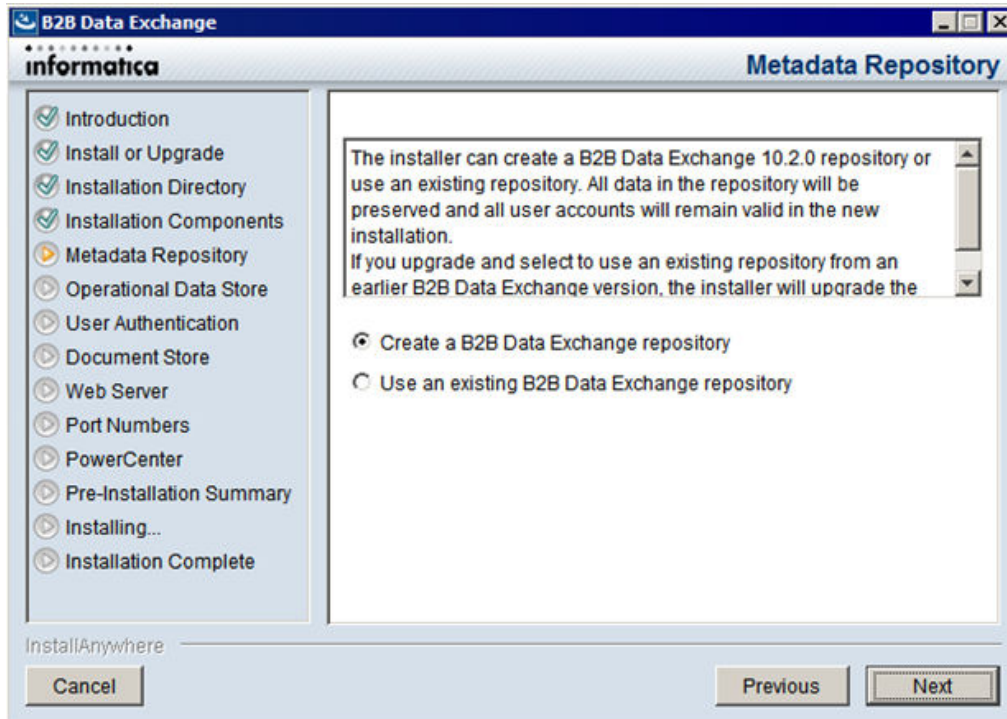

2. Click **Next**.

The **Metadata Repository Connection** page appears.

The screenshot shows the 'Metadata Repository Connection' window in the 'B2B Data Exchange' installer. The left sidebar lists installation steps, with 'Metadata Repository' selected. The main area contains a text box with instructions: 'Enter the repository connection details. The repository you specify will store information about Operation Console objects. Note: When using Microsoft SQL Server named instances, you must define a custom connection string.' Below this, the 'Database type' is set to 'SQLServer'. The 'Database URL' radio button is selected, with fields for 'Database host name', 'Database port number' (1433), and 'Database name'. The 'Custom connection string' radio button is unselected, with fields for 'JDBC string' (informatica:sqlserver://localhost:1433;DatabaseName=sa;) and 'ODBC string' (D=%1;PWD=%2;Server=localhost, 1433;Database=sa). There are also checkboxes for 'Use Windows Authentication', and fields for 'Database username' and 'Database user password'. At the bottom, there are 'Cancel', 'Previous', and 'Next' buttons.

The screenshot shows the 'Metadata Repository Connection' window in the 'Data Integration Hub' installer. The left sidebar lists installation steps, with 'Metadata Repository' selected. The main area contains a text box with instructions: 'Enter the repository connection details. The repository you specify will store information about Operation Console objects. Note: When using Microsoft SQL Server named instances, you must define a custom connection string.' Below this, the 'Database type' is set to 'Oracle'. The 'Database URL' radio button is selected, with fields for 'Database host name', 'Database port number' (1521), and 'Database SID'. The 'Custom connection string' radio button is unselected, with fields for 'JDBC string' (jdbc:informatica:oracle://localhost:1521;SID=orcl;) and 'ODBC string' (UID=%1;PWD=%2;Host=localhost;Port=1521;SN=orcl). There are also checkboxes for 'Use Windows Authentication', and fields for 'Database username' and 'Database user password'. At the bottom, there are 'Cancel', 'Previous', and 'Next' buttons.

3. Enter values in the following fields:

### Database type

Type of database to use for the B2B Data Exchange metadata repository. You can choose one of the following options:

- Oracle
- Microsoft SQL Server

### Database URL

Location of the database.

If you select this option, enter the values in the following fields:

- **Database host name.** Host name of the machine where the database server is installed.
- **Database port.** Port number for the database. The default port number for Oracle is 1521. The default port number for Microsoft SQL Server is 1433.
- **Database SID.** System identifier for the database if the database is Oracle. Enter either a fully qualified ServiceName or a fully qualified SID.

**Note:** It is recommended that you enter a ServiceName in this field.

- **Microsoft SQL Server database.** Database name.

### Custom Connection String

Connection string to the database.

If you select this option, enter values in one of the following fields:

- **JDBC string.** JDBC connection string to the metadata repository.
- **ODBC string.** ODBC connection string to the metadata repository. Available if you install the PowerCenter Client plug-in. The installer cannot verify the validity of the ODBC string.

**Note:** If you use a named Microsoft SQL Server database instance, you cannot connect to the database instance using the **Database URL** option. Use the **Custom Connection String** option.

For example:

```
jdbc:informatica:sqlserver://MYSQLSERVERCOMPUTERHOSTNAME  
\MYDBINSTANCENAME;DatabaseName=MYDATABASENAME;
```

### Use Windows Authentication

Instructs B2B Data Exchange to authenticate user names against the Microsoft Windows authentication mechanism. Available when you select a Microsoft SQL Server database.

### Database username

Name of the database user account for the Oracle database or Microsoft SQL Server database where you do not use Windows authentication.


### Database user password

Password for the database account for the Oracle database or Microsoft SQL Server database where you do not use Windows authentication. B2B Data Exchange stores the password as an encrypted string.

4. Click **Next**.



The **Publication Repository Connection** page appears.

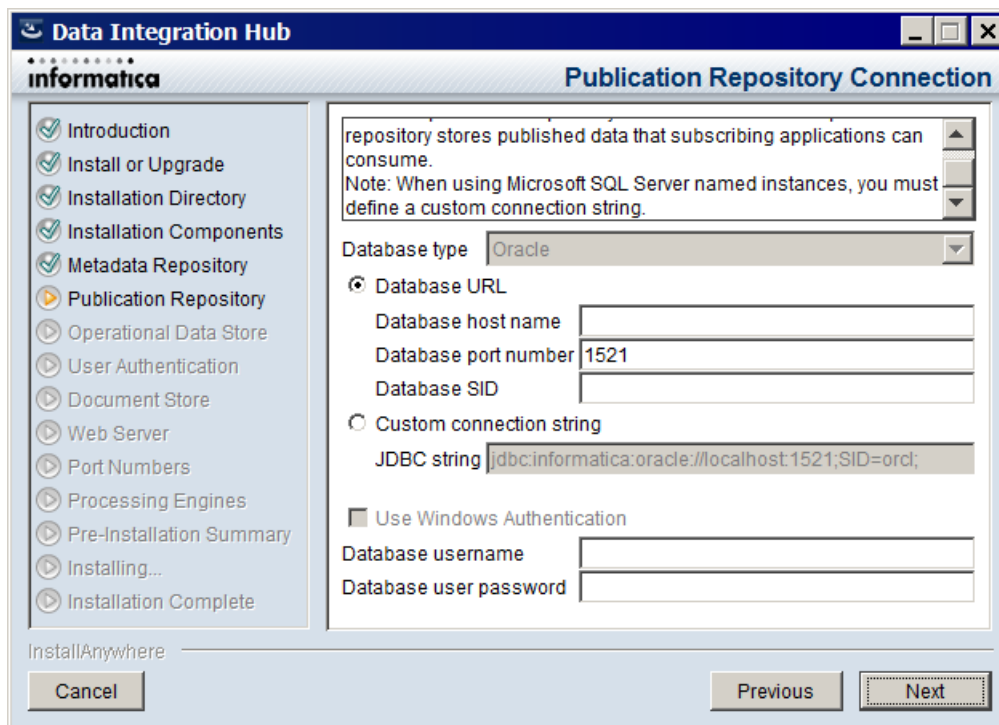

5. Enter values in the following fields:

**Database type**

Type of database to use for the publication repository. The database type must match the B2B Data Exchange metadata repository database type and appears in read-only mode.

**Database URL**

Location of the database.

If you select this option, enter values in the following fields:

- **Database host name.** Host name of the machine where the database server is installed.
- **Database port.** Port number for the database. The default port number for Oracle is 1521. The default port for Microsoft SQL Server is 1433.
- **Database SID.** System identifier for the database if the database is Oracle. Enter either a fully qualified ServiceName or a fully qualified SID.  
**Note:** It is recommended that you enter a ServiceName in this field.
- **Microsoft SQL Server database: Database name.** Name of the database instance.

**Custom Connection String**

JDBC connection string to the database.

**Note:** If you use a named Microsoft SQL Server database instance, you cannot connect to the database instance using the **Database URL** option. Use the **Custom Connection String** option.

**Use Windows Authentication**

Instructs B2B Data Exchange to authenticate user names against the Microsoft Windows authentication mechanism. Available when you select a Microsoft SQL Server database.

**Database username**

Name of the database user account for the Oracle database or Microsoft SQL Server database where you do not use Windows authentication.

**Database user password**

Password of the database account for the Oracle database or Microsoft SQL Server database where you do not use Windows authentication. B2B Data Exchange stores the password as an encrypted string.



6. Click **Next**.

If you selected the **B2B Data Exchange Dashboard and Reports** component, the **Operational Data Store** page appears. If you did not select the Dashboard and Reports component, go to [“Step 5. Configure the Web Server Configure Web Server and Port Numbers” on page 109](#).

## Step 4. Set Up the Operational Data Store

1. On the **Operational Data Store** page, select one of the following options:
  - **Create an operational data store repository**. Creates an operational data store repository in the database.

- **Use an existing operational data store repository.** Uses the tables and data in an existing operational data store repository.

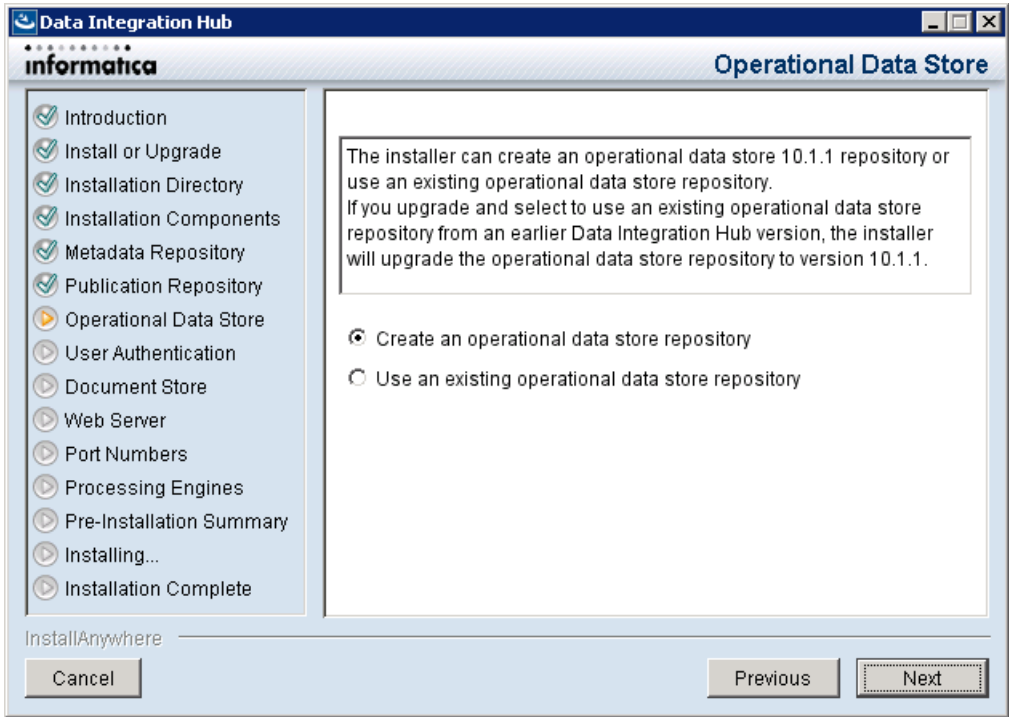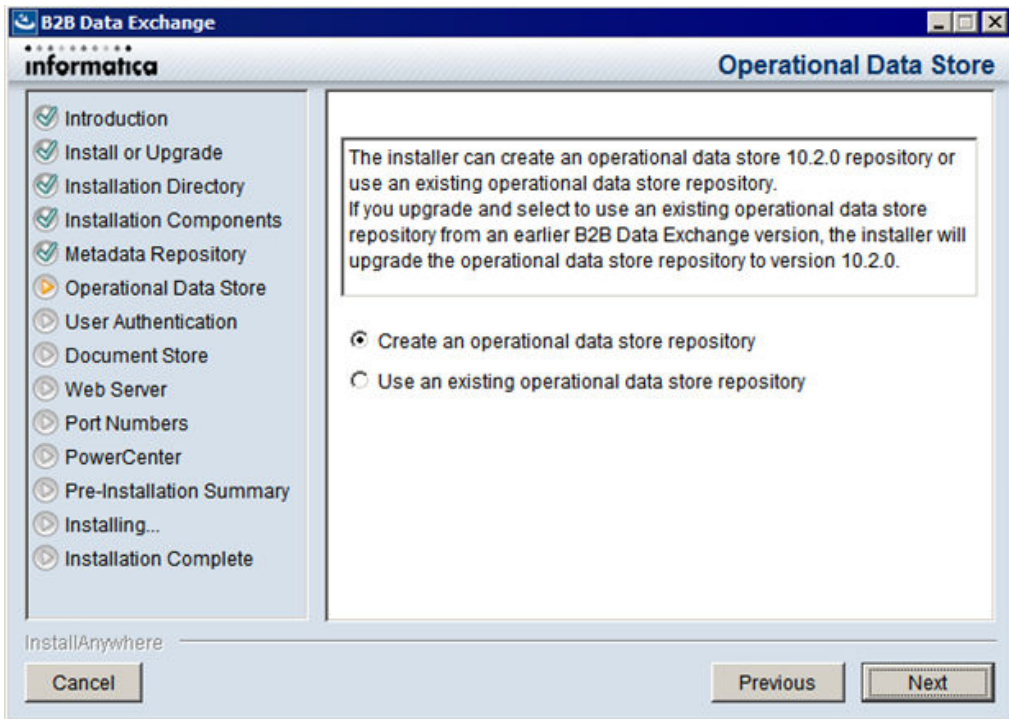

2. Click **Next**.

The **Operational Data Store Database Connection** page appears.

The screenshot shows the 'Operational Data Store Database Connection' window for 'B2B Data Exchange'. The left sidebar lists installation steps, with 'Operational Data Store' selected. The main area contains a text box with instructions: 'Enter the database connection details for the operational data store. Note: When using Microsoft SQL Server named instances, you must define a custom connection string.' Below this, the 'Database type' is set to 'SQLServer'. The 'Database URL' radio button is selected, with fields for 'Database host name', 'Database port number' (1433), and 'Database name'. The 'Custom connection string' radio button is unselected, with a 'JDBC string' field containing 'jdbc:sqlserver://localhost:1433;DatabaseName=dxods;'. There are also checkboxes for 'Use Windows Authentication', and fields for 'Database username' and 'Database user password'. At the bottom, there are 'Cancel', 'Previous', and 'Next' buttons.

The screenshot shows the 'Operational Data Store Database Connection' window for 'Data Integration Hub'. The left sidebar lists installation steps, with 'Operational Data Store' selected. The main area contains a text box with instructions: 'Enter the database connection details for the operational data store. Note: When using Microsoft SQL Server named instances, you must define a custom connection string.' Below this, the 'Database type' is set to 'Oracle'. The 'Database URL' radio button is selected, with fields for 'Database host name', 'Database port number' (1521), and 'Database SID'. The 'Custom connection string' radio button is unselected, with a 'JDBC string' field containing 'jdbc:informatica:oracle://localhost:1521;SID=ord;'. There are also checkboxes for 'Use Windows Authentication', and fields for 'Database username' and 'Database user password'. At the bottom, there are 'Cancel', 'Previous', and 'Next' buttons.

3. Enter values in the following fields:

### Database URL

Location of the database. If you select this option, enter the values in the following fields:

- **Database host name.** Host name of the machine where the database server is installed.
- **Database port.** Port number for the database. The default port number for the Oracle is 1521. The default port number for the Microsoft SQL Server is 1433.
- **Database SID.** System identifier for the database if you select Oracle as the database. Enter either a fully qualified ServiceName or a fully qualified SID.  
**Note:** It is recommended that you enter a ServiceName in this field.
- **Microsoft SQL Server database.** Database name.

### Custom Connection String

Connection string to the database. If you select this option, enter values in one of the following fields:

- **JDBC string.** JDBC connection string to the Operational Data Store.
- **ODBC string.** ODBC connection string to the Operational Data Store. Available if you install the PowerCenter Client plug-in. The installer cannot verify the validity of the ODBC string.

**Note:** If you use a named Microsoft SQL Server database instance, you cannot connect to the database instance using the **Database URL** option. Use the **Custom Connection String** option.

For example:

```
jdbc:informatica:sqlserver://MYSQLSERVERCOMPUTERHOSTNAME  
\MYDBINSTANCENAME;DatabaseName=MYDATABASENAME;
```

### Use Windows Authentication

Instructs B2B Data Exchange to authenticate user names against the Microsoft Windows authentication mechanism. Available when you select a Microsoft SQL Server database.

### Database username

Name of the operational data store user account for the Oracle database or the Microsoft SQL Server database where you do not use Windows authentication.

### Database user password

Password for the operational data store account for the Oracle database or the Microsoft SQL Server database where you do not use Windows authentication. B2B Data Exchange stores the password as an encrypted string.

4. Click **Next**.

The **Web Server** page appears.

## Step 5. Configure the Web Server Configure Web Server and Port Numbers

1. On the **Web Server** page enter values in the following fields:

### Enable HTTPS

Instructs B2B Data Exchange to use secure network communication when you open the Operation Console in the browser. If you select HTTPS and HTTP, the Operation Console switches existing HTTP connections with HTTPS connections.

### Connector port number

Port number for the Tomcat connector to use when you open the Operation Console with HTTPS. The default value is 18443.

### Use a keystore file generated by the installer

Instructs the installer to generate a keystore file with an unregistered certificate. If you select this option, ignore the security warning that you receive from the browser the first time you open the Operation Console.

### Use an existing keystore file


Instructs the installer to load an existing keystore file. Enter values in the following fields:

- Keystore password. Password for the keystore file.
- Keystore file. Path to the keystore file.

The keystore file must be in the Public Key Cryptography Standard (PKCS) #12 format.

2. Click **Next**.

The **Port Numbers** page appears.

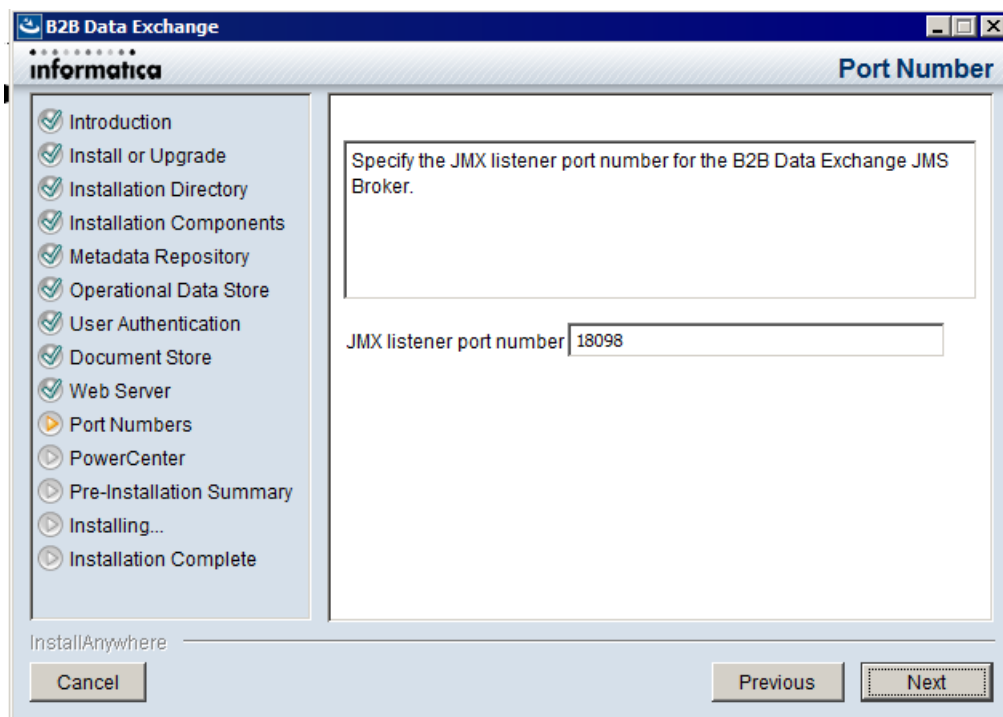

If you selected to install the B2B Data Exchange server plug-in for PowerCenter or the B2B Data Exchange client plug-in for PowerCenter components, the **PowerCenter Location** page appears. If you did not select the PowerCenter server or client components, the **PowerCenter Web Services Hub** page appears.

3. Enter the port number for the B2B Data Exchange JMS Broker JMX listener port or accept the default port, and then click **Next**.

If you selected to install the B2B Data Exchange server plug-in for PowerCenter or the B2B Data Exchange client plug-in for PowerCenter components, the **PowerCenter Location** page appears. If you did not select the PowerCenter server or client components, the **PowerCenter Web Services Hub** page appears.

## Step 6. Configure PowerCenter Settings

1. On the **PowerCenter Web Services Hub** page, enter the PowerCenter web services details.

### **Web Services Hub URL**

URL that the PowerCenter Web Services Hub uses when B2B Data Exchange transfers documents to PowerCenter for processing with batch workflows to process publication and subscription workflows.

### **Service name**

Name of the PowerCenter Repository Service.

### **Node host name**

Host name of the node that runs the PowerCenter Repository Service.

### **Node port number**

Port number of the node that runs the PowerCenter Repository Service.

### **Username**

Name of the PowerCenter Repository Service user.

### **Password**

Password for the PowerCenter Repository Service user. B2B Data Exchange stores the password as an encrypted string.

### **Security domain**

Optional. Name of the Informatica security domain in which the PowerCenter Repository Service user is stored.

Default is Native.

2. Click **Next**.

If you selected to install the B2B Data Exchange server plug-in for PowerCenter component, the **Informatica Domain PowerCenter Domain Settings** page appears.

If you did not select the PowerCenter server component, the **PowerCenter pmrep Command Line Utility Location** page appears. Go to step [5](#).

If you did not select the PowerCenter server component, the **Pre-Installation Summary** page appears. Go to [“Step 78. Complete the Installation” on page 117.](#)

The screenshot shows the 'B2B Data Exchange' window with the 'PowerCenter Domain Settings' dialog. The left sidebar lists installation components, with 'PowerCenter' selected. The main area contains a text box with instructions and five input fields: 'Domain name', 'Node name', 'Domain administrator username', 'Domain administrator password', and 'Integration Service name'. Navigation buttons 'Cancel', 'Previous', and 'Next' are at the bottom.

The screenshot shows the 'Data Integration Hub' window with the 'PowerCenter Domain Settings' dialog. The left sidebar lists installation components, with 'Processing Engines' selected. The main area contains a text box with instructions and five input fields: 'Domain name', 'Node name', 'Domain administrator username', 'Domain administrator password', and 'Integration Service name'. Navigation buttons 'Cancel', 'Previous', and 'Next' are at the bottom.

3. Enter values in the following fields:



**Domain name**

Name of the Informatica domain that contains the PowerCenter Integration Service that runs B2B Data Exchange workflows.

**Node name**

Node in the Informatica domain on which the PowerCenter Integration Service runs.

**Domain administrator username**

Name of the Informatica domain administrator.

**Domain administrator password**


Password for the Informatica domain administrator. B2B Data Exchange stores the password as an encrypted string.

**Integration Service name**

The name of the PowerCenter Integration Service that B2B Data Exchange uses to run workflows.

- 4. Click **Next**.

The **PowerCenter pmrep Command Line Utility Location** page appears.

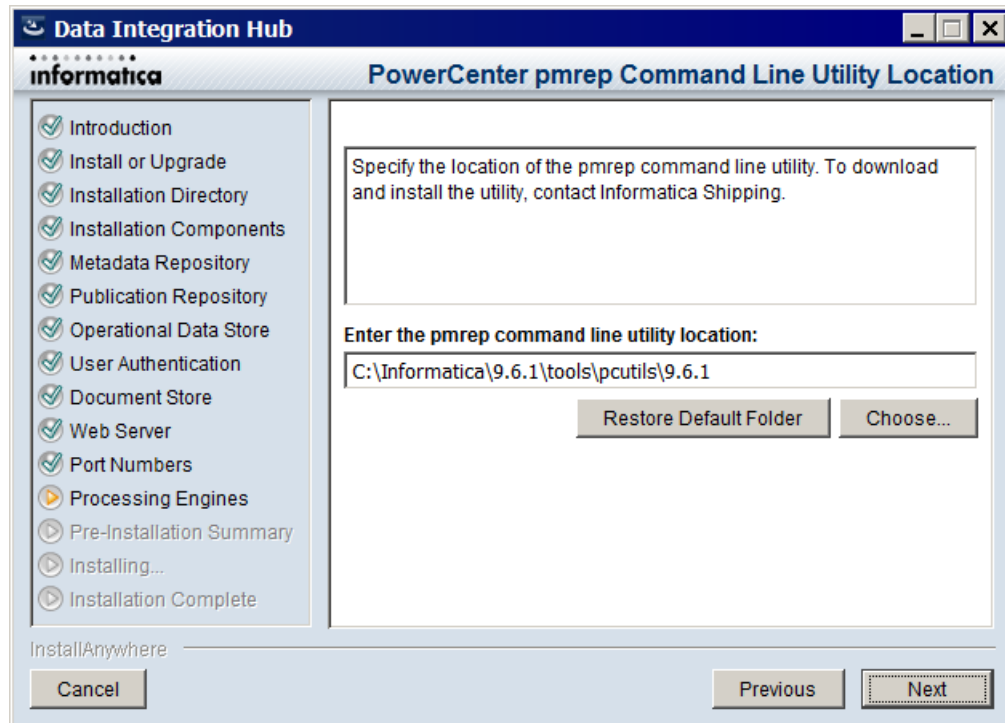

- 5. Specify the location of the pmrep command line utility.

The location of the utility depends on whether or not you install B2B Data Exchange on the machine where the PowerCenter services are installed.

Environment	Location of the pmrep command line utility
B2B Data Exchange installed on the machine where the PowerCenter services are installed	<pre data-bbox="776 401 1295 474">&lt;PowerCenter_services_installation_folder&gt; &lt;PowerCenter_version&gt;\tools\pcutils &lt;PowerCenter_version&gt;</pre>
B2B Data Exchange and PowerCenter services installed on different machines	<pre data-bbox="776 527 1370 600">&lt;PowerCenter_client_installation_folder&gt; &lt;PowerCenter_version&gt;\clients\PowerCenterClient client\bin</pre>

6. Click **Next**.

If you selected to install the B2B Data Exchange Informatica Data Quality component, the **Informatica Data Quality Domain Settings** page appears. If you did not select to install the B2B Data Exchange Informatica Data Quality component, the **Pre-Installation Summary** page appears.

## Step 7. Configure Data Quality Settings

1. If you selected to install the B2B Data Exchange Informatica Data Quality component, the **Informatica Data Quality Domain Settings** page appears.

The screenshot shows the 'Informatica Data Quality Domain Settings' dialog box. The left-hand navigation pane lists various installation steps, with 'Installing...' currently selected. The main content area contains a text box with the instruction: 'Specify the Informatica Data Quality domain, the administrator user account, and the Data Integration Service to run mappings.' Below this text box are several input fields for configuration: 'Domain name', 'Host name', 'Port number', 'Domain administrator username', 'Domain administrator password', 'Security domain (optional)', 'Data Integration Service name', and 'Model Repository Service name'. At the bottom of the dialog, there are three buttons: 'Cancel', 'Previous', and 'Next'.

Enter values in the following fields:

**Domain name**

Domain name of the node on which the Data Integration Service runs.

**Host name**

Host name of the node on which the Data Integration Service runs.

**Port number**

Port number of the node on which the Data Integration Service runs.

**Domain administrator username**

User name for the node on which the Data Integration Service runs.

**Domain administrator password**

Password for the node on which the Data Integration Service runs.

**Security Domain**

Optional. Name of the Informatica security domain in which the Model Repository Service user is stored.

**Data Integration Service name**


Name of the Data Integration Service.

**Model Repository Service name**

Name of the Model Repository Service.

2. Click **Next**.

The **Informatica Data Quality infacmd Command Line Utility** page appears.

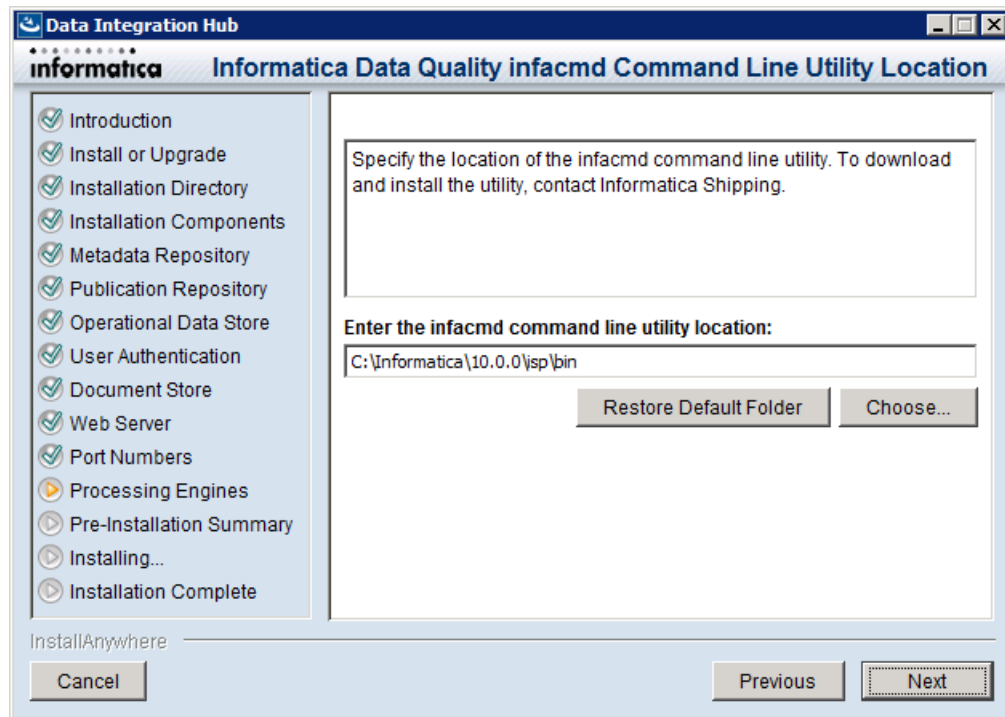


3. Enter the location of the infacmd command line utility or accept the default directory, and then click **Next**.

The **Pre-Installation Summary** page appears.

## Step 78. Complete the Installation

1. On the **Pre-Installation Summary** page, verify that the installation information is correct, and then click **Install**.

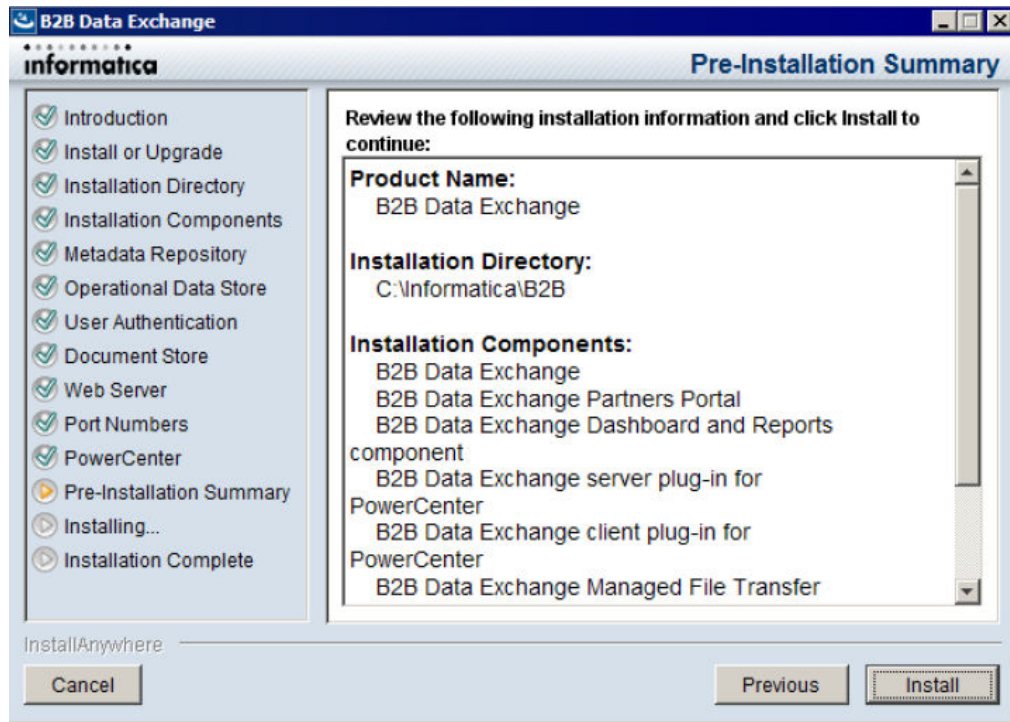

During the installation process, the installer displays progress information. When the installation process ends, the **Post-Installation Actions** page appears.

2. If you installed the B2B Data Exchange PowerCenter server plug-in, follow the wizard instructions to register the plug-in to the PowerCenter repository, and then click **Next**.

The **Installation Complete** page appears.

3. Click **Done** to close the installer.
4. To view the log files that the installer generates, navigate to the following directory:  
<DXInstallationDir>\logs.

5. Perform the required post-installation tasks.

For more information, see [Chapter 5, "Post-Installation Tasks" on page 68](#).

**Note:** Perform only the tasks that are relevant for your environment.

6. Optionally, perform additional configuration tasks. For more information, see [Chapter 9, "Optional B2B Data Exchange Configuration" on page 138](#).

# Upgrading B2B Data Exchange on a UNIX Operating System

Upgrade B2B Data Exchange on UNIX operating systems in console mode. On Windows operating systems, upgrade B2B Data Exchange in graphical mode.

Before you install, verify that your environment meets the minimum system requirements, perform the pre-installation tasks, and verify that the PowerCenter services are running.

**Note:** During the upgrade, B2B Data Exchange saves log files in the home directory of the user, in the subdirectory named `DXLogs`. If the upgrade does not complete successfully, you can view the log files in this location.

## Step 1. Run the Installer

1. Log in to the machine with the user account that you want to use to install B2B Data Exchange.  
To prevent permission errors, use the same account to install B2B Data Exchange and PowerCenter.
2. Close all other applications.
3. Run `Install.bin -i console` from the root directory of the DVD or from the directory where you downloaded the installer.  
The **Introduction** section appears.
4. Read the instructions, and then press **Enter**.  
The **Install or Upgrade** section appears.
5. Enter **2** to upgrade B2B Data Exchange, and then press **Enter**.  
The **Installation Directory** section appears.

## Step 2. Define Installation Settings

1. In the **Installation Directory** section, enter the absolute path to the installation directory or accept the default directory, and then press **Enter**.  
The **Installation Components** section appears and displays a numbered list of the components to install.
2. Enter a comma-separated list of numbers for the components to install or accept the default components:
  - 1- B2B Data Exchange**  
Installs the core B2B Data Exchange application.  
Selected by default.
  - 2- B2B Data Exchange Partners Portal**  
Installs the B2B Data Exchange Partners Portal component. You must install B2B Data Exchange to install the Partners Portal component.  
Selected by default.
  - 3-2- B2B Data Exchange Dashboard and Reports**  
Installs the B2B Data Exchange Dashboard and Reports component. You must install B2B Data Exchange to install the Dashboard and Reports component.  
Cleared by default.

#### 4-3- B2B Data Exchange Server Plug-in for PowerCenter

Installs the B2B Data Exchange PowerCenter server plug-in component. After the installation, register the plug-in to the PowerCenter repository.  
Selected by default.

#### 4- B2B Data Exchange Hadoop Service

Connecting module between B2B Data Exchange and the Hadoop cluster. Enables B2B Data Exchange to perform operations on the Hadoop publication repository.  
Select this component if you want to define a Hadoop-based publication repository and manage some of your topics on Hadoop.

**Note:** The B2B Data Exchange Hadoop Service must be installed on an edge node in the Hadoop cluster. Unless you are installing B2B Data Exchange on a Hadoop edge node, do not select this component during B2B Data Exchange installation. In this case, after you complete the B2B Data Exchange installation, run the installation again on the edge node and select to install only the B2B Data Exchange Hadoop Service component on the node.

#### 5- B2B Data Exchange Big Data Management/Informatica Data Quality

Enables B2B Data Exchange to use Big Data Management and Data Quality mappings for custom publications and subscriptions.

Select this component if you want to create custom publications and subscriptions that use Big Data Management or Data Quality mappings in B2B Data Exchange.

#### 5- B2B Data Exchange OEM Managed File Transfer

Adds the OEM Managed File Transfer component to B2B Data Exchange. You must install B2B Data Exchange to install the OEM Managed File Transfer component.  
Selected by default.

3. Press **Enter**.

The **Metadata Repository** section appears.

## Step 3. Configure B2B Data Exchange Repository Repositories

1. In the **Metadata Repository** section, enter the number for the metadata repository database configuration option or accept the default option:

#### 1- Create a B2B Data Exchange repository

Creates a repository in the database.

#### 1- Create a Data Integration Hub repository

Creates a repository in the database.

#### 2- Use an existing B2B Data Exchange repository

Uses the tables and data in an existing repository.

#### 2- Use an existing Data Integration Hub repository

Uses the tables and data in an existing repository.

2. Press **Enter**.

The **Metadata Repository Connection** section appears.

3. Enter 1 to use an Oracle database as the B2B Data Exchange metadata repository database.
4. Enter the number for the metadata repository database connection type or accept the default connection type:

### 1- Database URL

Location of the database. If you select this option, enter values in the following fields:

- Database host name. Host name of the machine where the database server is installed.
- Database port number. Port number for the database. The default port number for Oracle is 1521. The default port for Microsoft SQL Server is 1433.
- Database SID. System identifier for the database.

### 2- Custom Connection String

Connection string to the database. If you select this option, enter values in one of the following fields:

- JDBC string. JDBC connection string to the metadata repository.
- ODBC string. ODBC connection string to the metadata repository. Applicable if you install the PowerCenter client plug-in. The installer cannot verify the validity of the ODBC string.

**Note:** If you use a named Microsoft SQL Server database instance, you cannot connect to the database instance using the **Database URL** option. Use the **Custom Connection String** option.

For example:

```
jdbc:informatica:sqlserver://MYSQLSERVERCOMPUTERHOSTNAME  
\MYDBINSTANCENAME;DatabaseName=MYDATABASENAME;
```

5. Enter values in the following fields:

#### Database username

Name of the database user account for the Oracle database or the Microsoft SQL Server database.

#### Database user password

The password for the database account for the Oracle database or the Microsoft SQL Server database. B2B Data Exchange stores the password as an encrypted string.

6. Press **Enter**.

If you selected to install the B2B Data Exchange Dashboard and Reports component, the **Operational Data Store** section appears. If you did not select to install the Dashboard and Reports component, go to [“Step 5. Configure the Web Server Configure the Web Server and Port Numbers” on page 122.](#)

7. Enter the number for the publication repository connection type or accept the default connection type.

**Note:** When using Microsoft SQL Server named instances, you must define a custom connection string.

### 1- Database URL

Location of the database. If you select this option, enter values in the following fields:

- Database host name. Host name of the machine where the database server is installed.
- Database port number. Port number for the database. The default port number for Oracle is 1521. The default port for Microsoft SQL Server is 1433.
- Oracle database: Database SID. System identifier for the database.
- Microsoft SQL Server database: Database name. Name of the database instance.

### 2- Custom Connection String

Connection string to the database. If you select this option, enter values in one of the following fields:

- JDBC string. JDBC connection string to the publication repository.



- ODBC string. Applicable if you install the PowerCenter client plug-in. ODBC connection string to the publication repository. The installer cannot verify the validity of the ODBC string.

**Note:** If you use a named Microsoft SQL Server database instance, you cannot connect to the database instance using the **Database URL** option. Use the **Custom Connection String** option.

For example:

```
jdbc:informatica:sqlserver://MYSQLSERVERCOMPUTERHOSTNAME
\MYDBINSTANCENAME;DatabaseName=MYDATABASENAME;
```

8. Press **Enter**.
9. Enter values in the following fields:

**Database username**

Name of the database user account for the Oracle database or the Microsoft SQL Server database.

**Database user password**

The password for the database account for the Oracle database or the Microsoft SQL Server database. B2B Data Exchange stores the password as an encrypted string.

10. Press **Enter**.  
If you selected to install the B2B Data Exchange Dashboard and Reports component, the **Operational Data Store** section appears. If you did not select to install the Dashboard and Reports component, go to [“Step 5. Configure the Web Server Configure the Web Server and Port Numbers” on page 122.](#)

## Step 4. Set Up the Operational Data Store

1. In the **Operational Data Store** section, enter the number for the database configuration option for the operational data store or accept the default option:
  - 1- Create an operational data store repository**  
Creates an operational data store repository in the database.
  - 2- Use an existing operational data store repository**  
Uses the tables and data in an existing operational data store repository.
2. Enter the number for the database connection type for the operational data store or accept the default connection type:
  - 1- Database URL**  
Location of the database. If you select this option, enter values in the following fields:
    - Database host name. Host name of the machine where the database server is installed.
    - Database port number. Port number for the database. The default port number for Oracle is 1521. The default port for Microsoft SQL Server is 1433.
    - Oracle database: Database SID. System identifier for the database.
    - Microsoft SQL Server database: Database name. Name of the database instance.
  - 2- Custom Connection String**  
Connection string to the database. If you select this option, enter values in one of the following fields:
    - JDBC string. JDBC connection string to the Operational Data Store.
    - If you install the PowerCenter client plug-in: ODBC string. ODBC connection string to the Operational Data Store. The installer cannot verify the validity of the ODBC string.

**Note:** If you use a named Microsoft SQL Server database instance, you cannot connect to the database instance using the **Database URL** option. Use the **Custom Connection String** option.

For example:

```
jdbc:informatica:sqlserver://MYSQLSERVERCOMPUTERHOSTNAME  
\MYDBINSTANCENAME;DatabaseName=MYDATABASENAME;
```

3. Enter values for the operational data store in the following fields:

**Database username**

Name of the database user account for the Oracle database or the Microsoft SQL Server database.

**Database user password**

The password for the database account for the Oracle database or the Microsoft SQL Server database. B2B Data Exchange stores the password as an encrypted string.

4. Press **Enter**.

The **Web Server** section appears.

## Step 5. Configure the Web Server Configure the Web Server and Port Numbers

1. Configure the Web Server connection.

- a. Enter the number for the network communication protocol or accept the default protocol:

**1- Enable HTTPS**

Instructs B2B Data Exchange to use secure network communication when you open the Operation Console in the browser.

If you select HTTPS and HTTP, the Operation Console switches existing HTTP connections with HTTPS connections.

**2- Enable HTTP**

Instructs B2B Data Exchange to use regular HTTP network communication when you open the Operation Console in the browser.

- b. If you selected **Enable HTTPS**, enter values in the following fields:

**Connector port number**

Port number for the Tomcat connector to use when you open the Operation Console with HTTPS.

The default value is 18443.

**Use a keystore file generated by the installer**

Instructs the installer to generate a keystore file with an unregistered certificate. If you select this option, ignore the security warning that you receive from the browser the first time you open the Operation Console.

**Use an existing keystore file**

Instructs the installer to load an existing keystore file. Enter values in the following fields:

- Keystore password. Password for the keystore file.
- Keystore file. Path to the keystore file.

The keystore file must be in the Public Key Cryptography Standard (PKCS) #12 format.

- c. If you selected **Enable HTTP**, enter values in the following fields:

**HTTP connector port number**

Port number for the HTTP connector. If you clear this field, your browser must connect to the B2B Data Exchange server with HTTPS when you log in to the Operation Console.  
The default value is 18080.

**Server shutdown listener port number**

Port number for the listener that controls the Tomcat server shutdown.  
The default value is 18005.

2. Press **Enter**.

The **Port Numbers** section appears.

3. Press **Enter**.

If you selected to install the B2B Data Exchange PowerCenter server plug-in or the B2B Data Exchange PowerCenter Client plug-in components, the **PowerCenter Location** section appears. If you did not select the PowerCenter server or client components, the **PowerCenter Web Services Hub** section appears.

4. Enter the port number for the B2B Data Exchange JMS Broker JMX listener port or accept the default port and then press **Enter**.

If you selected to install the B2B Data Exchange PowerCenter server plug-in or the B2B Data Exchange PowerCenter Client plug-in components, the **PowerCenter Location** section appears. If you did not select the PowerCenter server or client components, the **PowerCenter Web Services Hub** section appears.

## Step 6. Configure PowerCenter Settings

1. If you selected to install the B2B Data Exchange PowerCenter server plug-in or the B2B Data Exchange PowerCenter Client plug-in components, in the **PowerCenter Location** section, enter the directory where you installed PowerCenter or accept the default directory, and then press **Enter**.

The **PowerCenter Web Services** section appears.

2. In the **PowerCenter Web Services** section, press **Enter** to accept the default URL or enter the URL that the PowerCenter Web Services Hub uses when B2B Data Exchange transfers documents to PowerCenter for processing with batch workflowsto process publication and subscription workflows and then press **Enter**.

3. Enter the name of the PowerCenter Repository Service, and then press **Enter**.

4. Enter values in the following fields:

**Node host name**

Host name of the node that runs the PowerCenter Repository Service.

**Node port number**

Port number of the node that runs the PowerCenter Repository Service.

**Username**

Name of the PowerCenter Repository Service user.

**Password**

Password for the PowerCenter Repository Service user. B2B Data Exchange stores the password as an encrypted string.

### Security domain

Optional. Name of the Informatica security domain in which the PowerCenter Repository Service user is stored.  
Default is Native.

5. Press **Enter**.

If you selected to install the B2B Data Exchange server plug-in for PowerCenter component, the **Informatica DomainPowerCenter Domain Settings** section appears. If you did not select the PowerCenter server component, the **PowerCenter pmrep Command Line Utility Location** section appears. Go to step 9. If you did not select the PowerCenter server component, the **Pre-Installation Summary** section appears. Go to [“Step 8. Complete the Installation” on page 126](#).

6. Enter values in the following fields:

#### Domain name

Name of the Informatica domain that contains the PowerCenter Integration Service that runs B2B Data Exchange workflows.

#### Node name

Node in the Informatica domain on which the PowerCenter Integration Service runs.

#### Domain administrator user name

Name of the Informatica domain administrator.

#### Domain administrator password

Password for the Informatica domain administrator. B2B Data Exchange stores the password as an encrypted string.

7. Press **Enter**.
8. Enter the name of the PowerCenter Integration Service that B2B Data Exchange uses to run workflows, and then press **Enter**.
9. Enter the location of the pmrep command line utility and then press **Enter**. The location of the utility depends on whether or not you install B2B Data Exchange on the machine where the PowerCenter services are installed.

**Note:** On Linux operating systems, pmrep must be executable.

Environment	Location of the pmrep command line utility
B2B Data Exchange installed on the machine where the PowerCenter services are installed	<PowerCenter_services_installation_folder>/ <PowerCenter_version>/tools/pcutils/ <PowerCenter_version>
B2B Data Exchange and PowerCenter services installed on different machines	<PowerCenter_client_utility_directory>/PowerCenter/ server/bin

10. Press **Enter**.

The **Pre-Installation Summary** section appears. If you selected to install the B2B Data Exchange Big Data Management/Informatica Data Quality component, the **Big Data Management/Informatica Data Quality Domain name** section appears. If you did not select to install the B2B Data Exchange Big Data Management/Informatica Data Quality component, the **Pre-Installation Summary** section appears.

## Step 7. Complete the Installation

1. In the **Pre-Installation Summary** section, verify that the installation information is correct, and then press **Enter**.  
During the installation process, the installer displays progress information.
2. If you installed the B2B Data Exchange PowerCenter server plug-in, follow the on-screen instructions to register the plug-in to the PowerCenter repository, and then press **Enter**.
3. To view the log files that the installer generates, navigate to the following directory:  
<DXInstallationDir>\logs
4. Perform the required post-installation tasks.  
For more information, see [Chapter 5, "Post-Installation Tasks" on page 68](#).  
**Note:** Perform only the tasks that are relevant for your environment.
5. Optionally, perform additional configuration tasks. For more information, see [Chapter 9, "Optional B2B Data Exchange Configuration" on page 138](#).

## Step 7. Configure Processing Engine Settings

1. In the **Big Data Management/Informatica Data Quality Domain name** section, press **Enter** to accept the default domain name or enter the name of the Informatica domain, and then press **Enter**.  
The **Big Data Management/Informatica Data Quality Host name** section appears.
2. Press **Enter** to accept the default host name or enter the host name of the node on which the Data Integration Service runs and then press **Enter**.  
The **Big Data Management/Informatica Data Quality Port number** section appears.
3. Press **Enter** to accept the default port number or enter the port number of the node on which the Data Integration Service runs and then press **Enter**.  
The **Big Data Management/Informatica Data Quality administrator user name** section appears.
4. Press **Enter** to accept the default user name or enter the user name for the node on which the Data Integration Service runs and then press **Enter**.  
The **Big Data Management/Informatica Data Quality administrator password** section appears.
5. Press **Enter** to accept the default password or enter the password for the node on which the Data Integration Service runs and then press **Enter**.  
The **Big Data Management/Informatica Data Quality Security Domain** section appears.
6. Optionally, enter the name of the Informatica security domain in which the Model Repository Service user is stored. Press **Enter**.  
The **Big Data Management/Informatica Data Quality Data Integration Service name** section appears.
7. Press **Enter** to accept the default name or enter the name of the Data Integration Service and then press **Enter**.  
The **Big Data Management/Informatica Data Quality Model Repository Service name** section appears.
8. Press **Enter** to accept the default name or enter the name of the Model Repository Service and then press **Enter**.  
The **Big Data Management/Informatica Data Quality infacmd Command Line Utility Location** section appears.
9. Press **Enter** to accept the default location or enter the location of the infacmd command line utility then press **Enter**.  
The **Pre-Installation Summary** section appears.

## Step 8. Complete the Installation

1. In the **Pre-Installation Summary** section, verify that the installation information is correct, and then press **Enter**.

During the installation process, the installer displays progress information.

2. If you installed the B2B Data Exchange PowerCenter server plug-in, follow the on-screen instructions to register the plug-in to the PowerCenter repository, and then press **Enter**.
3. To view the log files that the installer generates, navigate to the following directory:

```
<DXInstallationDir>\logs
```

4. Perform the required post-installation tasks.

For more information, see [Chapter 5, "Post-Installation Tasks" on page 68](#).

**Note:** Perform only the tasks that are relevant for your environment.

5. Optionally, perform additional configuration tasks. For more information, see [Chapter 9, "Optional B2B Data Exchange Configuration" on page 138](#).

## After You Upgrade

After you upgrade, update the B2B Data Exchange configuration files to work with the upgraded instance of B2B Data Exchange.

To update the configuration files and complete the upgrade process, perform the following steps:

1. Reapply modifications that were made to B2B Data Exchange configuration files in previous versions.
2. If you installed the Dashboard and Reports component, register the license of the Dashboard and Reports component.
3. If you installed the Dashboard and Reports component, import the operational data store (ODS) loader workflow.
4. To unregister the existing PowerCenter server plug-in, click the Plug-ins tab after the Repository Service restarts. Click the unregister icon (next to the existing plug-in) to unregister the plug-in.
5. Use the PowerCenter Administration Console to register the plug-in in the PowerCenter repository.
6. Restart PowerCenter workflows.
7. Start the B2B Data Exchange Server.
8. If any of the B2B Data Exchange repositories are installed on a Microsoft SQL Server and use Windows authentication, configure credentials for Windows authentication.
9. Update the security configuration files.
10. If any of the B2B Data Exchange repositories are installed on a Microsoft SQL Server and do not have partitions, delete all B2B Data Exchange partition functions. For example:  

```
DIH__DATE_PARTITION_FUNCTION.
```
11. If you are using the B2B Data Exchange Run Publication Subscription Web Service API, update the API.
12. Update the B2B Data Exchange custom workflows in PowerCenter.
13. If you installed the B2B Data Exchange Hadoop Service component for the first time, configure your environment for a Hadoop-based publication repository. For more information, see ["Configuring the Environment for a Hadoop Publication Repository" on page 75](#).

14. Start the B2B Data Exchange services. For more information, see [Chapter 8, “Starting and Stopping B2B Data Exchange” on page 136](#).

**Note:** If you installed the B2B Data Exchange Hadoop Service component on a different machine than the machine where you installed B2B Data Exchange, start the services on both machines. For more information, see [“Starting and Stopping B2B Data Exchange on UNIX” on page 137](#).

15. If you installed the B2B Data Exchange Hadoop Service component for the first time, log in to the Operation Console and configure the DIH\_\_STAGING\_\_HADOOP connection. For more information, see [“Configure Connections to the B2B Data Exchange Repositories” on page 78](#).

16. Run the importexport script to update the entities managed by B2B Data Exchange in PowerCenter.

17. Clear the browser cache on each of the client machines.

18. If you upgrade the Partners Portal component, to provide existing portal users with Partners Portal privileges, create portal user groups and then assign each portal user to a portal user group.

**Note:** If you do not assign a portal user to a portal user group, the portal user can only view the Dashboard in the Partners Portal.

19. If you installed the Partners Portal component, you can brand the Partners Portal with the organization logo.

**Note:** If you used your logo in the previous version, you must perform this task after the upgrade in order to re-brand the portal.

20. If you use real-time publication workflows, enable the property **Enable high precision** in the session that writes data to the B2B Data Exchange publication repository in all the real-time publication workflows.

21. Update the B2B Data Exchange custom workflows in PowerCenter.

22. If you use custom workflows, update the B2B Data Exchange publication repository in all the real-time publication workflows.

23. Update the entities that are managed by B2B Data Exchange in PowerCenter.

24. Update the custom workflows for events view enhancements.

25. If you installed the OEM Managed File Transfer component, perform the following procedures:

- Register the component license.
- To ensure secure access, change the default username and password and configure the relevant B2B Data Exchange settings.

**Note:** The B2B Data Exchange installer does not delete the previous version of B2B Data Exchange. The installer renames the folder with the suffix `_Backupn.n.n` where n.n.n is the version number that you upgraded. To ensure that you update the configuration files correctly, see the configuration files in the directory of the previous version of B2B Data Exchange.

If you installed the OEM Managed File Transfer component when you upgraded B2B Data Exchange, refer to the documentation suite for B2B Data Exchange version 10.1 for usage information.

## RELATED TOPICS:

- [“Importing the Web Services to PowerCenter” on page 73](#)

## Reapplying Configuration Modifications

Reapply modifications that were made to B2B Data Exchange configuration files in previous versions.

To perform this procedure, you must have backed up the B2B Data Exchange installation folder.

1. Open the following file from the location where you backed up the B2B Data Exchange installation folder:

```
<BackupDir>/conf/dx-configuration.properties
```

2. On the machine where B2B Data Exchange is installed, open the server and console copies of the `dx-configuration.properties` files in a text editor from the following locations:

```
<DXInstallationDir>\DataExchangeDataIntegrationHub\tomcat\shared\classes\  
<DXInstallationDir>\conf\
```

3. Copy any relevant configuration changes from the file that you backed up to both the `dx-configuration.properties` files.
4. Save the `dx-configuration.properties` files.

## Registering the Dashboard and Reports License

Register the license of the B2B Data Exchange Dashboard and Reports component.

1. Start the B2B Data Exchange services.
2. Move the file `_Settings.lgx` from the following location:

```
<DXInstallationDir>\DataExchangeDataIntegrationHub\tomcat\webapps\dx-dashboard  
\_Definitions
```

To the following location:

```
<DXInstallationDir>\DataExchangeDataIntegrationHub\tomcat\shared\classes
```

Rename the file to the following name:

```
dx_dashboard_configuration.xml
```

3. Reapply modifications that were made to the file `dx_dashboard_configuration.xml` in previous versions.
4. Copy the Logi Info Dashboard license file `_Settings_encrypted.lgx` to the following location:  

```
<DXInstallationDir>\DataExchangeDataIntegrationHub\tomcat\webapps\dx-dashboard  
\_Definitions
```
5. Rename the file `_Settings_encrypted.lgx` to `_Settings.lgx`.
6. Restart the B2B Data Exchange services.

## Replacing the Operational Data Store Loader Workflow

If you installed the Dashboard and Reports component for the first time, import the operational data store (ODS) loader workflow. If the Dashboard and Reports component was installed in the previous version of B2B Data Exchange and you are upgrading to the current version from a version earlier than 9.6.2, replace the existing workflow.

**Note:** If the Dashboard and Reports component was installed in the previous version of B2B Data Exchange, you must have unscheduled the B2B Data Exchange ODS loader workflow before you upgraded B2B Data Exchange to the current version. For more information, see [GUID-8BD86874-0566-47F6-99C8-16427FA8E887](#).

1. In PowerCenter Repository Manager, run the **Import Wizard**.



2. Select the B2B Data Exchange ODS loader workflow file. The name of the workflow file depends on the type of database on which the ODS is installed:

Database Type	Workflow Location and Name
Oracle	<DXInstallationDir>\powercenter\ETL\DX_ETL.xml
Microsoft SQL Server	<DXInstallationDir>\powercenter\ETL\DX_ETL_SQLSERVER.xml

3. If the Dashboard and Reports component was installed in the previous version of B2B Data Exchange and you are upgrading to the current version from version 9.6.1, select the PowerCenter repository folder that contains the B2B Data Exchange ODS loader workflow from the previous version as the import folder target.
4. If the Dashboard and Reports component was installed in the previous version of B2B Data Exchange, in the **Conflict Resolution Wizard**, select **Replace**.  
  
In the **Apply this resolution to** list, select **All Conflicts**. Click **Next**.
5. If the Dashboard and Reports component was installed in the previous version of B2B Data Exchange, in the **Conflict Resolution Wizard**, select **Replace**. In the **Apply this resolution to** list, select **All Conflicts**. Click **Next**.
6. In the Global Copy Options area select the options **Retain Sequence Generator, Normalizer, or XML key current values** and **Retain Persistent Mapping Variable Values**.
7. Follow the instructions in the **Import Wizard** to complete the import of the workflow.

## Configure Credentials for Windows Authentication

If you installed any of the B2B Data Exchange repositories on a Microsoft SQL Server and you selected to use Windows authentication, configure the credentials that B2B Data Exchange uses to access the Microsoft SQL Server instance.

Before you start the configuration process, verify that all B2B Data Exchange Windows services are stopped and that the B2B Data Exchange Operation Console and the B2B Data Exchange server are not running.

1. Access the Windows **Services** window.
2. Double-click the service **Informatica B2B Data Exchange Server version**.  
The B2B Data Exchange Server Properties window appears.
3. Select the **Log On** tab.
4. Select **This account**, click **Browse**, and then specify a user account in the **Select User** dialog box. When you are finished, click **OK**.
5. Type the password for the user account in **Password** and in **Confirm password**, and then click **OK**.
6. Repeat steps [2](#) through [5](#) for the service **Informatica B2B Data Exchange Console version**.

## Updating the Security Configuration Files

To perform this procedure, you must have backed up the B2B Data Exchange installation folder.

1. Open the following folder from the location where you backed up the B2B Data Exchange installation folder:

<BackupDir>\shared\conf\security\

2. Copy all the files from the backup `security` folder to the following folder:

`<DXInstallationDir>\shared\conf\security\`

Overwrite existing files.

## Updating the Run Publication Subscription Web Service API

If you are using the B2B Data Exchange Run Publication Subscription Web Service API, update the API before you start the B2B Data Exchange services.

1. Import the `runpublicationsubscription` B2B Data Exchange web service workflow to PowerCenter.
2. Update your client application to use the new web service.

## Restart the B2B Data Exchange Services

Restart the B2B Data Exchange Server and other services. For more information, see [Chapter 8, “Starting and Stopping B2B Data Exchange” on page 136](#).

Restart the B2B Data Exchange Server and the B2B Data Exchange Console services.

## Creating a Portal User Group

When you upgrade the Partners Portal component, create portal user groups in the Operation Console.

**Note:** If you do not assign a portal user group to a portal user, the portal user can only view the Dashboard in the Partners Portal.

1. In the Navigator, click **Administration > Portal User Groups**.  
The **Portal User Groups** page appears.
2. To create a portal user group, click **New User Group**.
3. To assign privileges to a portal user group, in the Privileges tab select the privileges to assign.
  - To assign the portal user role, select **Portal User Role**.
  - To view the Dashboard in the Partners Portal, click **View Dashboard**. Alternatively, to assign all Dashboard privileges, click **Dashboard**.
  - To view the Event List in the Partners Portal, click **View Event List**. Alternatively, to assign all Event List privileges, click **Event List**.
  - You can set the following message profile privileges in the Partners Portal:
    - To view message profiles, click **View Message Profiles**
    - To edit message profiles, click **Edit Message Profiles**.
    - Alternatively, to assign all privileges, click **Message Profile**.
- a. To assign the portal user role, select **Portal User Role**.  
**Note:** You cannot save the portal user group without assigning the portal user role.
- b. To view the Dashboard in the Partners Portal, click **View Dashboard**. Alternatively, to assign all Dashboard privileges, click **Dashboard**.
- c. To view the Event List in the Partners Portal, click **View Event List**. Alternatively, to assign all Event List privileges, click **Event List**.
- d. You can set the following message profile privileges in the Partners Portal:
  - To view message profiles, click **View Message Profiles**

- To edit message profiles, click **Edit Message Profiles**.
  - Alternatively, to assign all privileges, click **Message Profile**.
- e. You can set the following endpoint privileges in the Partners Portal:
    - To view endpoints, click **View Endpoints**.
    - To edit the password for organization hosted FTP or FTPs endpoints, click **Change Password**.
    - Alternatively, to assign all privileges, click **Endpoint**.
  - f. You can set the following file exchange privileges in the Partners Portal:
    - To view file exchanges, click **View File Exchange**.
    - To download files from the portal, click **Download Files**.
    - To upload files to the portal, click **Upload Files**.
    - To delete files on the portal, click **Delete Files**.
    - Alternatively, to assign all privileges, click **File Exchange**.
4. Click **Save**.

## Assigning a Portal User to a Portal User Group

When you upgrade the Partners Portal component, after you create portal user groups, assign portal users to portal user groups.

1. In the **Navigator**, click **Partner Management > Portal Users**.
2. To add the portal user to a user group, in the **User Groups** tab, select a user group from the **Available User Groups** panel and transfer the group to the **Selected User Groups** panel.

When you assign the portal user to a user group, the portal user obtains all the privileges associated with the user group. You can select more than one user group. If you do not assign a user group, the portal user can only view the Dashboard in the Partners Portal.

3. To save the changes, click **Save**.

## Customize the Partners Portal Logo

If you installed the Partners Portal component, you can brand the Partners Portal with the organization logo.

The Partners Portal requires two logo graphic files in .png format, a small logo and a large logo. The file for the small logo must be named `Organization_logo.png` and must be 144 pixels by 50 pixels. The file for the large logo must be named `Login_Organization_logo.png` and must be 170 pixels by 100 pixels. The logo graphics must be transparent.

1. Copy the `Login_Organization_logo.png` file to the following directory: `dx\tomcat\webapps\dx-portal\img>Login_Organization_logo.png`.

This logo appears in the upper right corner of the Partners Portal login page.

2. Copy the `Organization_logo.png` file to the following directory: `dx\tomcat\webapps\dx-portal\img\Organization_logo.png`.

This logo appears in the upper right corner of the Partners Portal tabs.

## Configure Data Archive

If you are upgrading to the current version, you must configure Data Archive.

1. Close B2B Data Exchange. Do not run any archive jobs related to B2B Data Exchange.
2. Update the `dx.archive.jdbc.url`, `dx.archive.jdbc.username`, and `dx.archive.jdbc.password` properties with the values for the URL, the user name, and the password that you use to access the history database.

Update these properties in the `dx-configuration.properties` file located in the directory `<DXInstallationDir>/conf/`. Also update these properties in the `dx-configuration.properties` file located in the directory `<DXInstallationDir>/tomcat/shared/classes/`.

3. Start B2B Data Exchange.

## Updating the B2B Data Exchange Custom Workflows in PowerCenter

Before you start the B2B Data Exchange services, update the B2B Data Exchange custom workflows in PowerCenter.

Update the following workflows:

- Flat file publications
  - Flat file subscriptions
  - Relational database publications
  - Relational database subscriptions
1. To update flat file publications, perform the following steps:
    - a. In PowerCenter, change the name of the input file so that the file name has the following format:  
`$InputFile<someUserSpecificName>`
    - b. Import the workflows to B2B Data Exchange and add the values of the parameters in the file.
    - c. If you use a publication repository that is installed on a Microsoft SQL Server, change the PowerCenter workflow `Target_Load` type from bulk to normal.
    - d. In the PowerCenter session properties, change the file type to Indirect.
    - e. If you use a publication repository that is installed on a Microsoft SQL Server, change the B2B Data Exchange publication instance date and all fields in the source that have a `datetime` data type to `datetime2`.
  2. To update flat file subscriptions, perform the following steps:
    - a. If you use a publication repository that is installed on a Microsoft SQL Server, change the B2B Data Exchange publication instance date and all fields in the source that have a `datetime` data type to `datetime2`.
    - b. Update the precision of the `<tableName>__PublicationInstanceIDs` and `<tableName>__PublicationInstanceDatesSQL` mapping parameters to 90000.
  3. To update relational database publications, perform the following steps:
    - a. If you use a publication repository that is installed on a Microsoft SQL Server, change the PowerCenter workflow `Target_Load` type from bulk to normal.
    - b. In the PowerCenter session properties, change the file type to Indirect.
    - c. If you use a publication repository that is installed on a Microsoft SQL Server, change the B2B Data Exchange publication instance date and all fields in the source that have a `datetime` data type to `datetime2`.
  4. To update relational database subscriptions, perform the following steps:
    - a. If you use a publication repository that is installed on a Microsoft SQL Server, change the B2B Data Exchange publication instance date and all fields in the source that have a `datetime` data type to `datetime2`.
    - b. Update the precision of the `<tableName>__PublicationInstanceIDs` and `<tableName>__PublicationInstanceDatesSQL` mapping parameters to 90000.

## Updating Entities Managed by B2B Data Exchange in PowerCenter

After you start the B2B Data Exchange service, update the entities managed by B2B Data Exchange in PowerCenter.

1. Navigate to the following directory:

```
<DIHInstallationDir>\dx-tools\
```

2. To update the entities, run the `importexport` command with the following syntax:

- On Windows operating systems: `importexport.bat -u <dih_username> -p <dih_password> -c noimport -v all`
- On UNIX operating systems: `importexport.sh -u <dih_username> -p <dih_password> -c noimport -v all`

## Updating Custom Workflows for Events View Enhancements

Copy the `m__DIH_sub_route_event` route event mapping changes from any of the automatic publication or subscription workflows in PowerCenter to your custom workflows.

1. Add the following ports to the expression transformation:

- `DXTargetSuccessRows` - Expression = `TgtSuccessRows`
- `DXTargetFailedRows` = `TgtFailedRows`
- `DXSourceFailedRows` = `SrcFailedRows`
- `DXSourceSuccessRows` = `SrcSuccessRows`

2. Connect the ports to the `NotifyDX` transformation.

## Register the OEM Managed File Transfer License

If you upgraded B2B Data Exchange and installed the OEM Managed File Transfer component, register the license before you launch Managed File Transfer.

Before you complete this task, verify that you have the following prerequisites:

- The license details you received from Informatica shipping.
- Internet access to the Cleo Licensing server at <https://license.cleo.com:443>.

After installing OEM Managed File Transfer, you must register your license for this component.

1. Log in to the B2B Data Exchange Operation Console with an administrator user account.
2. In the Navigator, click **Administration > MFT Console**.

The **Informatica B2B Managed File Transfer** console opens in another web page. If you are registering the license for the first time after you install, the **Informatica B2B Managed File Transfer Product Registration** window appears. If the license is registered, click **Tools > Register** to access the **Informatica B2B Managed File Transfer Product Registration** window.

3. Enter the license details you received from Informatica shipping in the **Serial Number** field and click **Check Registration**.

The Informatica B2B Managed File Transfer window appears.

4. Enter the required information and click **Register**.

A message informs you that the registration is successful.

5. Click **OK** to close the **Informatica B2B Managed File Transfer Product Registration** window.

6. Based on whether the license is registered or not, perform one of the following actions:
  - a. If the license is not registered, B2B Data Exchange opens the Managed File Transfer login window.



Go to step [7](#).

- b. If the license is registered, go to step [9](#).
7. Select **Edit** mode and enter **dxadmin** in the Password field.
8. Click **OK** to close the license registration window.
9. In the Navigator, click **Administration > MFT Console** and verify the registration by logging in to the **Informatica B2B Managed File Transfer** window.
10. Click **Tools > License > Request Permanent License** to convert the temporary license you installed to a permanent license.

For information about configuring your firewall and testing your setup, see the *B2B Data Exchange Managed File Transfer User Guide (VersaLex Powered by Cleo)*.

## Configuring User Name and Password for the OEM Managed File Transfer

If you upgraded B2B Data Exchange and installed the OEM Managed File Transfer component, to ensure that access to the Managed File Transfer component is secure, change the user name and password from the default settings.

After you create a user name and password to use Managed File Transfer with B2B Data Exchange, edit the following B2B Data Exchange system properties with the Operator Console:

System Property	Edit
dx.endpoint.mft.username	Enter the user name for Managed File Transfer.
dx.endpoint.mft.password	Enter the internal password for Managed File Transfer. Use the password for edit- and view-only operations. You must restart the B2B Data Exchange server to apply the change.

For information about how to define permissions and add user groups for Managed File Transfer, refer to the *B2B Data Exchange Managed File Transfer User Guide*.

If you install the B2B Data Exchange Partners Portal component, to ensure that access between the Partners Portal and Managed File Transfer is secure, edit the following properties in the `dx-configuration.properties` file:

System Property	Edit
<code>internal.service.username</code>	Enter an internal username for access between the B2B Data Exchange Partners Portal and Managed File Transfer.
<code>internal.service.password</code>	Enter an encrypted password for access between the B2B Data Exchange Partners Portal and Managed File Transfer. Use the <code>dxpassword</code> utility to encrypt the password.

The `dx-configuration.properties` file is located in the following directories:

- `DXInstallationDir>\DataExchange\conf\`
- `DXInstallationDir>\DataExchange\tomcat\shared\classes\`

To encrypt a password with the `dxpassword` utility, in the directory `DXInstallationDir>\dx-tools\`, do the following:

- In Windows, use the following command:

```
dxpasswd.bat -p toEncrypt
```

- In Unix, use the following command:

```
dxpasswd.sh -p toEncrypt
```

## CHAPTER 8

# Starting and Stopping B2B Data Exchange

This chapter includes the following topics:

- [Overview of Starting and Stopping B2B Data Exchange, 136](#)
- [Starting and Stopping B2B Data Exchange on Windows, 136](#)
- [Starting and Stopping B2B Data Exchange on UNIX, 137](#)

## Overview of Starting and Stopping B2B Data Exchange

Stop or start the B2B Data Exchange services.

For example, start the services after you install B2B Data Exchange, or stop the services before you upgrade B2B Data Exchange.

## Starting and Stopping B2B Data Exchange on Windows

Start and stop the B2B Data Exchange services from the Start menu or run the startup and shutdown scripts.

The installer creates shortcuts in the Start menu to start and stop all B2B Data Exchange services.

### Starting and Stopping B2B Data Exchange from the Start Menu

On Windows operating systems, you can use the Start menu to start and stop all B2B Data Exchange services. You cannot start or stop a single service from the Start menu.

1. In the Start menu, click **Informatica > B2B Data Exchange**.
2. Choose one of the following options:
  - **Start Services**. Starts all B2B Data Exchange services.



- Stop Services. Stops all B2B Data Exchange services.
- Operation Console. Opens the Operation Console in a Web browser.

## Starting and Stopping B2B Data Exchange with Batch Scripts

On Windows operating systems, you can run scripts to start and stop one or more B2B Data Exchange services.

1. Navigate to the following directory:

```
<DXInstallationDir>\bin
```

2. Choose the script to run.

- startup.bat. Starts all B2B Data Exchange services.
- shutdown.bat. Stops all B2B Data Exchange services.
- Start each of these services separately in the listed order:
  - activemq.bat. Starts the B2B Data Exchange JMS Broker.
  - mft.bat. Starts the B2B Managed File Transfer service.
  - dxconsole.bat. Starts the Operation Console.
  - dxserver.bat. Starts the B2B Data Exchange server.

## Starting and Stopping B2B Data Exchange on UNIX

Run the scripts to start or stop the B2B Data Exchange services. The installer creates shell scripts that you can use to start or stop all the B2B Data Exchange services or to start each service separately. You cannot stop each service separately.

1. Navigate to the following directory:

```
<DXInstallationDir>/bin
```

2. Choose the script to run.

- startup.sh. Starts all B2B Data Exchange services.
- shutdown.sh. Stops all B2B Data Exchange services.
- Start each of these services separately in the listed order:
  - activemq.sh. Starts the B2B Data Exchange JMS Broker.
  - mft-server.sh. Starts the Informatica Managed File Transfer service.
  - mft.sh. If you upgraded B2B Data Exchange and installed the OEM Managed File Transfer, this command starts the OEM Managed File Transfer service.
  - dxconsole.sh. Starts the Operation Console.
  - dxserver.sh. Starts the B2B Data Exchange server.

**Note:** If you installed the B2B Data Exchange Hadoop Service component on a different machine than the machine where you installed B2B Data Exchange, to stop or to start the Hadoop service on the machine where the service is installed, run the `startup.sh` or `shutdown.sh` script from the following location:

```
<DXInstallationDir>/DataIntegrationHub/tomcat/bin/
```

## CHAPTER 9

# Optional B2B Data Exchange Configuration

This chapter includes the following topics:

- [Optional B2B Data Exchange Configuration Overview, 138](#)
- [Modifying Port Numbers, 139](#)
- [Modifying the B2B Data Exchange Server RMI Port Number, 142](#)
- [Logs, 142](#)
- [Changing the Maximum Java Heap Size, 146](#)
- [Changing the Credentials for a Database User Account, 147](#)
- [Changing the Credentials for the Data Integration Hub Hadoop Service, 149](#)
- [Updating the Dashboard Configuration File, 150](#)
- [Configuring the pmrep Process Pool, 150](#)
- [Configuring a PowerCenter Integration Service to Access B2B Data Exchange, 151](#)
- [Configuring Repository Connections on PowerCenter Version 10, 151](#)
- [Configuring the B2B Data Exchange JMS Broker, 152](#)
- [Activating the ActiveMQ Web Console, 152](#)
- [Configure System Properties to Enable Informatica Managed File Transfer Access, 153](#)
- [Installing a Single Sign On Key , 153](#)
- [Sharing Informatica Managed File Transfer Directories with B2B Data Exchange, 154](#)
- [Adding Variables to Custom Informatica Managed File Transfer Projects, 155](#)

## Optional B2B Data Exchange Configuration Overview

Optional configuration includes tasks that you might want to perform after you install or upgrade B2B Data Exchange, or at a later date.

- The B2B Data Exchange components send information through ports. You can change the default port numbers based on the requirements of your network environment.
- When different components process information or encounter errors, log files contain information that you can use to analyze and troubleshoot the installed components. You can change the location of the log files or define custom logs.

- To increase performance and reliability, you can change the maximum memory allocation for the B2B Data Exchange JMS Broker service, the embedded B2B Data Exchange server broker, or the embedded B2B Data Exchange console broker.
- If you change the database user credentials for the B2B Data Exchange repository repositories or for the operational data store, you must update the B2B Data Exchange configuration files. If you are running the Dashboard and Reports component, you must also update the relevant PowerCenter connections.
- If you use a Hadoop-based publication repository and you change the credentials for the user account of the B2B Data Exchange Hadoop Service, you must update the B2B Data Exchange configuration files.
- If you use the Dashboard and Reports component, and the IP addresses of the machine that hosts B2B Data Exchange change any time after the installation, you must update the IP addresses in the dashboard configuration file.
- To speed up the system response time when you create connections, topics, publications, and subscriptions in the B2B Data Exchange Operation Console, configure the pmrep process pool.  
**Note:** This step is relevant to systems running PowerCenter 9.5.1 HotFix 4 and PowerCenter 9.6.1 HotFix 1 or higher.
- For the B2B Data Exchange Dashboard and Reports component, you can specify a user name, password, and location for the operational data store user account.
- During the B2B Data Exchange installation or upgrade, you define a PowerCenter Integration Service that B2B Data Exchange uses to run workflows. If required, you can configure a different PowerCenter Integration Service to access B2B Data Exchange.
- If you use the Dashboard and Reports component, your B2B Data Exchange and operational data store repositories are installed on Microsoft SQL Servers, and you use PowerCenter version 10, configure the repository connections in PowerCenter Workflow Manager.
- If you want to change JMS broker communication settings, configure attributes to modify control of the JMS broker.
- To use the Active MQ Web Console to troubleshoot JMS broker communications, access the Active MQ Web Console, then use the predefined username and password.
- If you installed the Informatica Managed File Transfer component, perform the following procedures:
  - Configure the relevant B2B Data Exchange system properties and restart B2B Data Exchange before you try to access Informatica Managed File Transfer from the Operations Console.
  - You must enable SSO with Informatica Managed File Transfer before you try to access Informatica Managed File Transfer from the Operations Console. To enable SSO, copy the keystore from the Informatica Managed File Transfer server and the install an SSO key on the B2B Data Exchange server.
  - Share the B2B Data Exchange download directory and the Informatica Managed File Transfer Web User directories with both B2B Data Exchange and Informatica Managed File Transfer Web.
  - If you create a custom project in Informatica Managed File Transfer, ensure that you include specific variables to pass information from B2B Data Exchange system properties.

## Modifying Port Numbers

You can modify the port numbers that B2B Data Exchange uses to send and receive information.

You can modify the numbers of the following ports:

- B2B Data Exchange server startup and shutdown port

- B2B Data Exchange server RMI port
- JNDI provider port

## Modifying the B2B Data Exchange Server Startup and Shutdown Port Number

On Windows operating systems, edit the Java Service Wrapper file to configure the B2B Data Exchange server to use a different port. On UNIX and Windows operating systems, run the dxserver command line utility with the different port number.

When you start the B2B Data Exchange server with a different port number, you must use the same port number when you ping or shut down the B2B Data Exchange server.

1. On Windows operating systems, edit the Java Service Wrapper file.
  - a. On the machine where B2B Data Exchange is installed, open the wrapper.conf file in a text editor from the following directory:
 

```
<DXInstallationDir>/conf
```
  - b. Search for the following text:
 

```
wrapper.app.parameter.2=start
```
  - c. Add the following line below the text:
 

```
wrapper.app.parameter.3=<PortNumber>
```
  - d. Replace the <PortNumber> value with the port number that you want to use.
  - e. Save the wrapper.conf file.
2. On Windows and UNIX operating systems, run the following command to restart the B2B Data Exchange:
  - Windows: `dxserver.bat start <PortNumber>`
  - UNIX: `dxserver.sh start <PortNumber>`

## Modifying the B2B Data Exchange Server RMI Port Number

Replace the RMI port number in the dx-configuration.properties files and in the PowerCenter Integration Service.

1. On the machine where B2B Data Exchange is installed, open the server and console copies of the dx-configuration.properties files in a text editor from the following locations:
 

```
<DXInstallationDir>/DataExchangeDataIntegrationHub/tomcat/shared/classes/  
<DXInstallationDir>/conf/
```
2. Enter the port number in the following property:
 

```
dx.rmi.port=
```
3. Save the dx-configuration.properties files.
4. In the Administrator tool, select the PowerCenter Integration Service that runs B2B Data Exchange transformations.
5. On the Processes tab of the PowerCenter Integration Service, add or edit the DX\_SERVER\_URL environment variable and set the URL of the B2B Data Exchange server in the following format:
 

```
rmi://<HostName>:<PortNumber>
```
6. Save the changes and restart the B2B Data Exchange services.

After you change the RMI port number, make sure you use it when you run the command line utilities. For example, to use the port number when you import, export, or archive B2B Data Exchange repository objects, run the command line utilities with the following options:

- **Import:** `importexport -c import -f <ExportFile> -s <SpecificationFile> -u <UserID> --server <"HostName:PortNumber">`
- **Export:** `importexport -c export -f <ExportFile> -s <SpecificationFile> -u <UserID> --server <"HostName:PortNumber">`
- **Archive:** `archive -s <SpecificationFile> -u <UserID> --server <"HostName:PortNumber">`

**Note:** You may encounter B2B Data Exchange performance and stability issues when using the basic archive command line utility in B2B Data Exchange. It is recommended to use the Data Archive utility for archiving high volumes of event data in production.

## Modifying the JNDI Provider Port Number

PowerCenter uses the JNDI provider to find the JMS queues that B2B Data Exchange uses to send and receive messages. When you change the JNDI port number, change it in the B2B Data Exchange workflow connection objects in PowerCenter and in the `dx.endpoint.jms.provider.url` B2B Data Exchange system property. If you use JMS endpoints, also change the port number in the `activemq.xml` file and in the JMS endpoint properties.

1. In the Workflow Manager, update the port number in the JNDI Provider URL attribute of the JNDI connection object for all B2B Data Exchange workflows.

2. In the Operation Console, click **Administration > System Properties**.

The **System Properties** page appears.

3. In the `dx.endpoint.jms.provider.url`, change the port number in the property value.

The following example shows the property value with the default port number:

```
failover:tcp://localhost:18616
```

4. In the Operation Console, click **Partner Management > Endpoints**.

The **Endpoints** page appears.

5. In each JMS Send or JMS Receive endpoint, change the port number in the value of the Provider URL property.

6. On the machine where B2B Data Exchange is installed, open the `activemq.xml` file in a text editor from the following directory:

```
<DXInstallationDir>\message-broker\conf\
```

7. In the `<transportConnectors>` element, change the port number for the URL attribute of the openwire connector.

The following example shows the URL with the default port number:

```
<transportConnector name="openwire" uri="tcp://localhost:18616" />
```

8. Save the `activemq.xml` file.

# Modifying the B2B Data Exchange Server RMI Port Number

Replace the RMI port number in the dx-configuration.properties files and in the PowerCenter Integration Service.

1. On the machine where B2B Data Exchange is installed, open the server and console copies of the dx-configuration.properties files in a text editor from the following locations:

```
<DXInstallationDir>/DataExchangeDataIntegrationHub/tomcat/shared/classes/  
<DXInstallationDir>/conf/
```

2. Enter the port number in the following property:

```
dx.rmi.port=
```

3. Save the dx-configuration.properties files.
4. In the Administrator tool, select the PowerCenter Integration Service that runs B2B Data Exchange transformations.
5. On the Processes tab of the PowerCenter Integration Service, add or edit the DX\_SERVER\_URL environment variable and set the URL of the B2B Data Exchange server in the following format:

```
rmi://<HostName>:<PortNumber>
```

6. Save the changes and restart the B2B Data Exchange services.

After you change the RMI port number, make sure you use it when you run the command line utilities. For example, to use the port number when you import, export, or archive B2B Data Exchange repository objects, run the command line utilities with the following options:

- **Import:** `importexport -c import -f <ExportFile> -s <SpecificationFile> -u <UserID> --server <"HostName:PortNumber">`
- **Export:** `importexport -c export -f <ExportFile> -s <SpecificationFile> -u <UserID> --server <"HostName:PortNumber">`
- **Archive:** `archive -s <SpecificationFile> -u <UserID> --server <"HostName:PortNumber">`

**Note:** You may encounter B2B Data Exchange performance and stability issues when using the basic archive command line utility in B2B Data Exchange. It is recommended to use the Data Archive utility for archiving high volumes of event data in production.

## Logs

The B2B Data Exchange log files include information that you can use to analyze activity and troubleshoot.

You can configure the following logs:

- Debug logs
- RMI server logs
- Database debug logs
- Import logs

To send log messages to a different log file destination, you can create an SNMP appender to redirect the logs to a custom destination.

## Default Log Files

B2B Data Exchange creates log files that record diagnostic information regarding system and user operations. The installer also creates log files that record installation selections and configuration.

You can configure log settings in the log4j.xml file located in the B2B Data Exchange configuration directory.

The following log files are available:

### Server

The dxserver.log file is located in the following directory:

```
<DXInstallationDir>/logs
```

You can change the log mode to debug to generate more messages while you troubleshoot server issues.

### Operation Console

The log files are located in the following directory:

```
<DXInstallationDir>/DataExchangeDataIntegrationHub/tomcat/logs
```

### Managed File Transfer

The log files are located in the following directory:

```
<DXInstallationDir>\ManagedFileTransfer\logs
```

The following logs include Managed File Transfer server error information:

- System XML log file (VLTrader.xml)
- System debug file (VLTrader.dbg)

### JMS Broker

The log files are located in the following directory:

```
<DXInstallationDir>\message-broker\data\
```

The log4j.properties configuration file are located in the following directory:

```
<DXInstallationDir>\message-broker\
```

### Installer

The log files are located in the following directory:

```
<DXInstallationDir>/logs
```

### B2B Data Exchange Hadoop Service

When you use the B2B Data Exchange Hadoop Service, the log files are located in the following directory:

```
<DXInstallationDir>/DataIntegrationHub/tomcat/logs
```

## Customizing the Destination for Log Messages

By default, the log4j logging utility sends log messages to files. You can configure the log4j utility to send log messages to a destination that is different from the default log files with the Simple Network Management Protocol (SNMP). The installer installs the file that the log4j utility requires to work with SNMP.

Complete the following tasks to change the destination:

1. Add an SNMP appender to the log4j properties file and set the logging level. Change the sample SNMP appender in the log4j.xml file to the appender that you want to use. You can add multiple appenders to the log4j.xml file that send different types of log messages to different SNMP outputs.

2. Configure an SNMP manager to listen for messages. For information about configuring the SNMP manager to handle log4j messages, see the documentation for your SNMP network management software.

For general information about the log4j utility, see the Apache Web site:

<http://logging.apache.org/log4j/1.2/manual.html>

## SNMP Appender Parameters

The parameters of the SNMP appender in the log4j.xml file define the output destination and settings for log messages.

The following table describes the SNMP parameters that you can define for B2B Data Exchange:

Parameter	Description
ManagementHost	IP address of the monitoring system host. Default is <b>127.0.0.1</b>
ManagementHostTrapListenPort	Port number of the monitoring system host. Default is <b>162</b>
LocalIPAddress	IP address of local SNMP embedded agent. You do not normally need to modify this value. Default is <b>127.0.0.1</b>
LocalTrapSendPort	Port number of the local SNMP embedded agent. Default is <b>161</b>
CommunityString	Name of the SNMP community. Default is <b>public</b>
GenericTrapType	Type of the trap. Set one of the following values: <ul style="list-style-type: none"> <li>- 0=cold start</li> <li>- 1=warm start</li> <li>- 2=link down</li> <li>- 3=link up</li> <li>- 4=authentication failure</li> <li>- 5=egg neighbor loss</li> <li>- 6=enterprise specific</li> </ul> Default is <b>6=enterprise specific</b>
ApplicationTrapOID	Identifier of the application object that sends the trap messages. You can set the value of this parameter to the name of the application object in B2B Data Exchange. Default is <b>1.3.6.1.2.1.2.0.0.0.0</b>
EnterpriseOID	Identifier of the organization object sending the trap message. You can set this parameter to any value that identifies the message in B2B Data Exchange. Default is <b>1.3.6.1.2.1.2.0</b>
ForwardStackTraceWithTrap	Determines whether to include the stack trace in the log message. Default is <b>False</b>



Parameter	Description
Threshold	<p>Level of details to report. Set one of the following values:</p> <ul style="list-style-type: none"> <li>- FATAL</li> <li>- ERROR</li> <li>- WARN</li> <li>- INFO</li> <li>- DEBUG</li> </ul> <p>Threshold values that are lower than INFO or WARN might cause heavy network traffic. For fewer notifications, set the threshold value to FATAL. For a larger number of notifications, set the threshold value to WARN.</p>
SysUpTime	<p>Amount of time that the application is running. Set the value to 0 to calculate the system up time when a message is sent.</p> <p>Default is <b>0</b></p>

## Adding an SNMP Appender to the log4j.xml File

Add an SNMP appender to the B2B Data Exchange server or Operation Console copies of the log4j.xml file to customize the output destination for log messages.

- Back up the log4j.xml file that you want to edit from one of the following locations:
  - B2B Data Exchange server: <DXInstallationDir>/conf
  - Operation Console: <DXInstallationDir>/DataExchangeDataIntegrationHub/tomcat/shared/classes
- Open the file in a text editor and search for the following text:

```
SNMP_TRAP is a sample appender
```
- To edit the sample appender with the actual values of your appender, remove the comment indicators from the SNMP\_TRAP appender and edit the appender parameters and values based on your requirements.

**Note:** You can also add an appender below the sample appender instead of editing the sample appender.
- To set the formatting of the log messages, edit the layout element.

The following example shows the layout element of the sample appender:

```
<layout class="org.apache.log4j.PatternLayout">
  <param name="ConversionPattern" value="%d{ISO8601} %-5p [%c] {%t} %m%n"/>
</layout>
```

For information about the layout pattern options, see the description on the Apache Website: <http://logging.apache.org/log4j/1.2/apidocs/org/apache/log4j/PatternLayout.html>

- To activate the appender, search for the following text:

```
<root>
```

- Add the appender name to the appender list.

The following example shows the appender list after you add the appender name:

```
<root>
  <priority value="INFO"/>
  <appender-ref ref="BROKER-LOG"/>
  <appender-ref ref="CONSOLE"/>
  <appender-ref ref="SNMP_TRAP"/>
</root>
```

- Save the log4j.xml file.

After you add the SNMP appender, configure your SNMP manager to listen for the log messages.

# Changing the Maximum Java Heap Size

You can change the maximum memory allocation for the B2B Data Exchange JMS Broker service, the embedded B2B Data Exchange server broker, or the embedded B2B Data Exchange console broker.

## B2B Data Exchange JMS Broker

To change the maximum Java heap size of the B2B Data Exchange JMS Broker, open one of the following files:

Operating System	File Location
Microsoft Windows	<DXInstallationDir>\bin\setenv.bat
UNIX	<DXInstallationDir>/bin/setenv.sh

Change the maximum heap size in MB in the ACTIVEMQ\_OPTS property. The default maximum heap size is 512 MB.

## Embedded B2B Data Exchange server broker

To change the maximum Java heap size of the embedded B2B Data Exchange server broker, open one of the following files:

Operating System	File Location
Microsoft Windows	<DXInstallationDir>\bin\setenv.bat
UNIX	<DXInstallationDir>/bin/setenv.sh

Change the maximum heap size in MB in the DX\_SERVER\_OPTS property. The default maximum heap size is 1024 MB.

## Embedded B2B Data Exchange client broker

To change the maximum Java heap size of the B2B Data Exchange client, open one of the following files:

Operating System	File Location
Microsoft Windows	<DXInstallationDir>\bin\setenv.bat
UNIX	<DXInstallationDir>/bin/setenv.sh

Change the maximum heap size in MB in the CATALINA\_OPTS property. The default minimum heap size is 128 MB and the default maximum heap size is 2048 MB.

## B2B Data Exchange JMS Broker service

To change the maximum Java heap size of the B2B Data Exchange JMS Broker service on Microsoft Windows operating systems, open the following file:

```
<DXInstallationDir>\message-broker\bin\win32\wrapper.conf
```

Change the maximum Java heap size in MB in the wrapper.java.maxmemory property. The default maximum heap size is 512 MB.

## B2B Data Exchange server service

To change the maximum Java heap size of the B2B Data Exchange server service on Microsoft Windows operating systems, open the following file:

```
<DXInstallationDir>\conf\wrapper.conf
```

Change the maximum heap size in MB in the `wrapper.java.maxmemory` property. The default maximum heap size is 1024 MB.

## B2B Data Exchange client service

To change the maximum Java heap size of the B2B Data Exchange client service on Microsoft Windows operating systems, run the following command:

```
<DXInstallationDir>\DataExchangeDataIntegrationHub\tomcat\bin\tomcat7.exe //US//  
InfadxOpConsoleversion --JvmMx <max_heap_size>
```

Enter the maximum heap size in MB with integers and without letters. The default maximum heap size is 2048 MB.

# Changing the Credentials for a Database User Account

When you install B2B Data Exchange, you specify a user name and a user password for the user accounts of the B2B Data Exchange repository database and of the publication repository database. If you are running the Dashboard and Reports component, you also specify a user name and a user password for the operational data store user account.

Perform the following steps if you change the credentials for a database user account after you install B2B Data Exchange. Perform only the steps that are relevant to the changes that you are making. If you are not running the Dashboard and Reports component, skip the steps that are only relevant to this component.

1. Stop the B2B Data Exchange services and close the Operation Console.
2. Verify that the PowerCenter Integration Service is not running any B2B Data Exchange workflows.
3. If you are running the Dashboard and Reports component, and you are changing credentials for the B2B Data Exchange repository or for the operational data store user account, use the PowerCenter Workflow Manager to update the credentials in the following connections:
  - For the B2B Data Exchange repository, update the DX\_REPO connection.
  - For the operational data store, update the DX\_ODS connection.
4. If you are changing a password, perform the following steps:
  - a. Run the password encryption utility and enter the new password in the following syntax:
    - On Windows operating systems: `<DXInstallationDir>\dx-tools\dxpasswd.bat -p <NewPassword>`
    - On UNIX operating systems: `<DXInstallationDir>/dx-tools/dxpasswd.sh -p <NewPassword>`The password encryption utility encrypts the password and displays an encrypted string. For example, `-->ywo+o3cw8+03iLdlhPprW2YA==<--`.
  - b. Copy the encrypted string without the `--><--` indicators to the clipboard.

5. Open both copies of the `dx-configuration.properties` file from the following locations in a text editor:
  - `<DXInstallationDir>/DataExchangeDataIntegrationHub/tomcat/shared/classes/`
  - `<DXInstallationDir>/conf/`
6. In both copies of the `dx-configuration.properties` file, perform the following steps:
  - a. Search for the text that is relevant to the changes that you are making:
    - B2B Data Exchange repository:
      - `dx.jdbc.username=<CurrentUsername>`
      - `dx.jdbc.password=<CurrentPassword>`
    - Publication repository:
      - `dih.staging.jdbc.username=<CurrentUsername>`
      - `dih.staging.jdbc.password=<CurrentPassword>`
    - Operational data store:
      - `dx.dashboard.jdbc.username=<CurrentUsername>`
      - `dx.dashboard.jdbc.password=<CurrentPassword>`
  - b. Replace the relevant value with the new value. If you are replacing a password, enter the encrypted string.
  - c. Save and close the files.

**Note:** The content in both copies of the `dx-configuration.properties` file must be identical.
7. Start the B2B Data Exchange Operation Console.
8. If you are changing the credentials for the operational data store user account, perform the following steps:
  - a. In the Navigator click **Administration > System Properties**.
  - b. Change the values of the `dx.dashboard.jdbc.username` and the `dx.dashboard.jdbc.password` properties to the new values. For the password, enter the encrypted string.
9. Verify that the PowerCenter Integration Service is running.
10. If you are changing the credentials for the B2B Data Exchange repository or for the publication repository, perform the following steps:
  - a. In the Navigator, click **Hub Management > Connections**.  
The **Connections** page appears.
  - b. Click the **Test Connection** icon next to the connection to the repository for which you want to change the credentials.
    - DIH\_\_REPO. Connection to the B2B Data Exchange repository.
    - DIH\_\_STAGING. Connection to the publication repository.

B2B Data Exchange tests the connection. The process might take a few moments.
  - c. When the message "Connection successful" shows, click **OK** in the **Test Connection** dialog box.
11. Start the B2B Data Exchange Server service.
12. If you are running the Dashboard and Reports component, perform the following steps to schedule the B2B Data Exchange operational data store loader workflow:
  - a. In PowerCenter Workflow Manager, expand the folder where the operational data store loader workflow is located and then right-click **DX\_ETL**.
  - b. Select **Schedule** from the menu and wait until PowerCenter Workflow Manager schedules and runs the workflow.

# Changing the Credentials for the Data Integration Hub Hadoop Service

When you install B2B Data Exchange, the installation assigns a user name and a user password for the user account of the B2B Data Exchange Hadoop Service.

Perform the following steps if you change the credentials of the B2B Data Exchange Hadoop Service at a later date.

1. Stop the B2B Data Exchange services and close the Operation Console. For more information, see [“Starting and Stopping B2B Data Exchange on UNIX” on page 137](#)
2. Verify that the PowerCenter Integration Service is not running any B2B Data Exchange workflows.
3. If you are changing a password, perform the following steps:
  - a. Run the password encryption utility and enter the new password in the following syntax:

```
<DXInstallationDir>/dx-tools/dxpasswd.sh -p <NewPassword>
```

The password encryption utility encrypts the password and displays an encrypted string. For example, -->ywo+o3cw8+03iLdlhPprW2YA==<--.

- b. Copy the encrypted string without the --><-- indicators to the clipboard.
4. Open both copies of the `dx-configuration.properties` file in a text editor from the following locations on the machine where B2B Data Exchange is installed:

```
<DXInstallationDir>/DataExchangeDataIntegrationHub/tomcat/shared/classes/  
<DXInstallationDir>/conf/
```

5. If the B2B Data Exchange Hadoop Service component is installed on a different machine than the machine where B2B Data Exchange is installed, on the machine where the B2B Data Exchange Hadoop Service is installed, open the `dx-configuration.properties` file in a text editor from the following location:

```
<DXInstallationDir>/conf/
```

6. In all the copies of the `dx-configuration.properties` file, perform the following steps:
  - a. Search for the following text :

```
internal.service.username=  
internal.service.password=
```

- b. Replace the relevant value with the new value. If you are replacing a password, enter the encrypted string.
- c. Save and close the files.

**Note:** The content in all copies of the `dx-configuration.properties` file must be identical.

7. Start the B2B Data Exchange Operation Console.
8. Verify that the PowerCenter Integration Service is running.
9. In the Navigator, click **Hub Management > Connections**.  
The **Connections** page appears.
10. Click the **Test Connection** icon next to the `DIH_STAGING_HADOOP` connection.  
B2B Data Exchange tests the connection. The process might take a few moments.
11. When the message "Connection successful" shows, click **OK** in the **Test Connection** dialog box.
12. Start the B2B Data Exchange Server services. For more information, see [“Starting and Stopping B2B Data Exchange on UNIX” on page 137](#)

# Updating the Dashboard Configuration File

If you use the Dashboard and Reports component, and the IP addresses of the machine that hosts B2B Data Exchange change any time after the installation, you must update the IP addresses in the dashboard configuration file.

1. Open the dashboard configuration file from the following location:

```
<DXInstallationDir>\DataExchangeDataIntegrationHub\tomcat\shared\classes  
\dx_dashboard_configuration.xml
```

2. In the Security section, in the `AuthenticationClientAddresses` attribute, update the IP addresses of all the Network Interface Cards that provide access to the machine that hosts B2B Data Exchange, including both IPv4 and IPv6 addresses. For example:

```
<Security AuthenticationSource="SecureKey" SecurityEnabled="True"  
AuthenticationClientAddresses="127.0.0.1,0:0:0:0:0:0:1,10.36.8.34,fe80:0:0:0:c1f:  
167a:bc3c:8307%11,10.36.112.186,fe80:0:0:0:5c9a:af6e:  
87b9:3c08%12,fe80:0:0:0:7c26:627:71d2:4784%14,fe80:0:0:0:5efe:a24:822%16,fe80:0:0:0:  
:0:5efe:a24:70ba%16,fe80:0:0:0:5efe:c0a8:7701%17,192.168.119.1,fe80:0:0:0:45cf:  
7bcf:f673:4392%18,192.168.162.1,fe80:0:0:0:3516:cd0c:  
6f8:df39%19,fe80:0:0:0:5efe:c0a8:a201%20" RestartSession="False"  
CacheRights="Session" LogonFailPage="https://HBW180084:18443/dx-console/logout.jsp">
```

3. Restart the B2B Data Exchange services.

# Configuring the pmrep Process Pool

Speed up the system response time when you create connections, topics, publications, and subscriptions in the B2B Data Exchange Operation Console.

**Note:** This procedure is relevant to systems running PowerCenter 9.5.1 HotFix 4 and PowerCenter 9.6.1 HotFix 1 or higher.

Based on your PowerCenter version, get one of the following Informatica EBFs:

- For PowerCenter 9.6.1 HotFix 1: EBF14598
- For PowerCenter 9.5.1 HotFix 4: EBF14597

1. On the computer where B2B Data Exchange is installed, back up the following folder: `<INFA_HOME>\server\bin`.
2. Copy the EBF to the `<INFA_HOME>\server\bin` folder.
3. Open the EBF file and extract the library that corresponds to your operating system to the `<INFA_HOME>\server\bin` folder.
4. On the machine where B2B Data Exchange is installed, open the server and console copies of the `dx-configuration.properties` files in a text editor from the following locations:

```
<DXInstallationDir>\DataExchangeDataIntegrationHub\tomcat\shared\classes\  
<DXInstallationDir>\conf\  

```

5. Enable following properties in both the `dx-configuration.properties` files:

```
#pwc.pmrep.use.process.pool=true  
#pwc.pmrep.process.pool.max=5
```

6. Save the `dx-configuration.properties` files.

# Configuring a PowerCenter Integration Service to Access B2B Data Exchange

During the B2B Data Exchange installation or upgrade, you define a PowerCenter Integration Service that B2B Data Exchange uses to run workflows. If required, you can configure a different PowerCenter Integration Service to access B2B Data Exchange.

In the Java classpath for the PowerCenter Integration Service, add the path to the B2B Data Exchange class files.

1. Log in to the Administrator tool and select the PowerCenter Integration Service that runs the workflows for B2B Data Exchange.
2. On the **Processes** tab, edit the Java SDK ClassPath property and add the location of the B2B Data Exchange Java classes at the beginning of the ClassPath property:

```
<DXInstallationDir>/powercenter/lib/dx-client-powercenter-10.2.0.jar;  
<DXInstallationDir>/powercenter/lib/commons-logging-1.1.3.jar;  
<DXInstallationDir>/powercenter/lib/log4j-1.2.17.jar;  
<DXInstallationDir>/powercenter/lib/activemq-all-5.12.1.1.jar
```

**Note:** You can reference the libraries if the you can access the <DXInstallationDir> from PowerCenter, or you can copy the library files locally.

3. Add environment variables to the B2B Data Exchange console and server integration services.

Integration Service	Environment Variable
DX_CONSOLE_URL	rmi://<HostName>:<dx.tpm.rmi.port>
DX_SERVER_URL	rmi://<HostName>:<dx.rmi.port>

You can find the RMI port numbers for the console and server in the following location:

```
<DXInstallationDir>\conf\dx-configuration.properties
```

By default:

- dx.tpm.rmi.port: 18096
- dx.rmi.port: 18095

4. Save the changes.

## Configuring Repository Connections on PowerCenter Version 10

If you use the Dashboard and Reports component, your B2B Data Exchange and operational data store repositories are installed on Microsoft SQL Servers, and you use PowerCenter version 10, configure the repository connections in PowerCenter Workflow Manager.

1. In the Workflow Manager, access the DX\_REPO database connection and open the **Connection Object Definition** dialog box.

2. Perform the following actions and then click **OK**:
  - a. Select **Use DNS**.
  - b. In the **Connect String** text box enter the connection name. The name is defined in the ODBC Data Source Administrator interface, in ODBC SQL Server Wire Protocol Setup, in the **Data Source Name** field.
3. Repeat steps [1](#) and [2](#) for the DX\_ODS connection.

## Configuring the B2B Data Exchange JMS Broker

To configure the JMS communications broker, modify attributes and elements in the `activemq.xml` file. The file is located in the following folder: `<DXInstallationDir>\message-broker\conf\`

Modify the **memoryLimit** attribute to determine the maximum memory allocation for message transfer. You can increase the memory limit if you expect a large number of queues and messages or higher message volume. You can modify the memory limit for the following elements:

- `policyEntry topic`
- `policyEntry queue`

The default value is 20 MB.

To troubleshoot message communication issues, you can instruct the JMS Broker to open the administrator console when you start the B2B Data Exchange services.

The **jetty.xml** import element appears with the following syntax:

```
<!--  
<import resource="jetty.xml"/>  
-->
```

To access the administrator console, remove the comment indicators around the element and restart the B2B Data Exchange services.

If you use a JMS source, ensure that the PowerCenter workflow source property **Transacted Mode** is set to **Yes**.

1. Select to edit the workflow.
2. In the Mapping tab, select the source. In the Attributes section, change the value of the property **Transacted Mode** to **Yes**.

## Activating the ActiveMQ Web Console

The ActiveMQ Web Console is a troubleshooting tool that can be used to debug JMS broker communication issues for B2B Data Exchange.

By default, the ActiveMQ Web Console is disabled. To enable the web console, in the `activemq.xml` file located in the directory `<DXInstallationDir>\message-broker\conf\`, un-comment the following section:

```
<import resource="jetty.xml"/>
```



After you activate the ActiveMQ Web Console, use the following user name and password to access the ActiveMQ Web Console:

Access Setting	Value
user name	admin
password	admin

## Configure System Properties to Enable Informatica Managed File Transfer Access

If you install the Informatica Managed File Transfer component, to ensure that B2B Data Exchange can access Managed File Transfer, define the following system properties with the Operations Console:

System Property	Description
infamft.api.username	Name of a user from a user account with privileges to run Informatica Managed File Transfer projects. The credential is used to execute Informatica Managed File Transfer projects.
infamft.api.password	Password of the user defined for the <b>infamft.api.username</b> property. The credential is used to execute Informatica Managed File Transfer projects.
infamft.console.url	URL address for Informatica Managed File Transfer.

After you edit the system properties, restart B2B Data Exchange.

## Installing a Single Sign On Key

Single Sign On (SSO) uses a symmetric key that applications share. After you install Informatica Managed File Transfer, you create a master key with the Informatica Managed File Transfer `mft-keytool` utility. Specify the keygen, keystore, and key passphrases. Next, use the master key to enable SSO with B2B Data Exchange. After you enable SSO, you can launch Managed File Transfer from the B2B Data Exchange Operation console.

To create an SSO key for Informatica Managed File Transfer, see the *Informatica Managed File Transfer Installation Guide*. After you create the SSO key for Informatica Managed File Transfer, perform the following steps:

**Note:** In order to launch Managed File Transfer from the B2B Data Exchange Operation console you must enable Informatica domain authentication for both Managed File Transfer and B2B Data Exchange

1. Copy the generated Informatica Managed File Transfer keystore file `keystore.jceks` from the directory `<MFT_INSTALL_DIR>\mft\config\security` on the Informatica Managed File Transfer server to the B2B Data Exchange server.

2. To install an SSO key, run the `install-ssokey.bat` tool in Windows or the `install-ssokey.sh` tool in Linux based systems on the B2B Data Exchange server. Run a command with the following syntax:

```
-c installMftSSOKey -f <keyStoreFileName> -kp <keyPassOption> -ksp <keyStorePassOption>
```

**-c installMftSSOKey**

Required. Installs the SSO key.

**-kp <Key Passphrase>**

Required. Specify a passphrase from 7 to 255 characters that will access the SSO encryption key. The passphrase is the same one that you specified when you created the key on the Informatica Managed File Transfer server.

**-ksp <Keystore Passphrase>**

Required. Specify a keystore passphrase from 7 to 255 characters that will access the SSO keystore. The passphrase is the same one that you specified when you created the keystore on the Informatica Managed File Transfer server.

**-f <Keystore File Name>**

Required. Specify the path to the keystore file that you copied from the Informatica Managed File Transfer server.

3. Stop the B2B Data Exchange services and close the Operation Console, and then restart the services. For more information, see ["Starting and Stopping B2B Data Exchange on UNIX" on page 137](#)
4. For multiple B2B Data Exchange servers in high availability mode, follow the same procedure to install the key separately on each node.

## Sharing Informatica Managed File Transfer Directories with B2B Data Exchange

Use Informatica Managed File Transfer to configure client and server machines that serve as B2B Data Exchange endpoints. If you install the Managed File Transfer component, to ensure that endpoints function correctly, share the relevant Managed File Transfer directories with B2B Data Exchange.

Before using an MFT Remote Receive or MFT Hosted Receive endpoint that runs a project, you must share the Informatica Managed File Transfer download directory. Share the Managed File Transfer directory specified in the B2B Data Exchange system property named `infamft.download.location` with B2B Data Exchange.

Before using an MFT Hosted Receive or MFT Hosted Send endpoint, share the Managed File Transfer directory `<MFT installation>\server\userdata\webdocs` with B2B Data Exchange.

# Adding Variables to Custom Informatica Managed File Transfer Projects

You can use pre-configured Informatica Managed File Transfer projects to define communication protocols and file management processes for B2B Data Exchange MFT endpoints. If you choose to create a custom project, ensure that you include the following variables.

For an MFT Hosted Receive endpoint that runs a custom project, the source directory is specified with a variable starting with `InputFile`. For example, you could include the variable `${InputFile_DXData}` in the custom project to pass the source directory path to B2B Data Exchange.

For an MFT Hosted Send endpoint that runs a custom project, the destination file is specified with the variable `${OutputFile_DXData}` in the project.

## CHAPTER 10

# Installing and Configuring the B2B Data Exchange Accelerator for Data Archive

This chapter includes the following topics:

- [Installing and Configuring B2B Data Exchange Accelerator for Data Archive Overview, 156](#)
- [Pre-Installation Steps, 157](#)
- [Installing the B2B Data Exchange Accelerator for Data Archive, 159](#)
- [Configuring the Data Archive Source Connection from Production Database to History Database, 160](#)
- [Source and Target Connections, 161](#)
- [Securing Data Archive Connections, 164](#)
- [Creating the History Database Tables and Indexes, 165](#)
- [Create the Seamless Access Layer for the History Database, 166](#)
- [Creating a File Archive User, 166](#)
- [Creating a File Archive Folder, 167](#)
- [Creating an Archive Job, 167](#)
- [Archive Job Parameters, 168](#)
- [Scheduling Archive Jobs, 169](#)
- [Viewing Archived Events, 170](#)
- [Limitations, 174](#)

## Installing and Configuring B2B Data Exchange Accelerator for Data Archive Overview

The B2B Data Exchange accelerator is a plug-in for Data Archive that enables you to archive purge events that B2B Data Exchange generates with Data Archive. The accelerator utilizes the advanced archiving capabilities

of Data Archive, such as detailed archive parameters, recurring archive jobs, and easily accessible archive repositories.

After you install B2B Data Exchange Accelerator for Data Archive, configure the archive project based on the archiving requirements in your organization Data Archive source connection. Perform the following configuration steps:

1. Create the source and target connections.
2. To secure access to the source connections, configure access roles and access users, and then create a security group.
3. Create the history database tables and indexes.
4. Create the seamless access layer for the history database.
5. Create the file archive user and the file archive folder.
6. Schedule archive jobs, and then archive the B2B Data Exchange repository.
7. To view archived documents and events in the B2B Data Exchange Operations Console, configure system properties and assign user permissions.
8. To view archived documents and events in the Data Discovery portal, configure the relevant Data Archive search to browse data, search data, or search by-reference documents.

**Note:** You may encounter B2B Data Exchange performance and stability issues when using the basic archive command line utility in B2B Data Exchange. It is recommended to use the Data Archive utility for archiving/purging high volumes of event data in production.

## Pre-Installation Steps

Before you install the B2B Data Exchange accelerator in Data Archive, make sure that your system meets the minimum requirements and follow the pre-installation steps.

1. Make sure you have an active installation of Data Archive. A limited Data Archive version is provided with B2B Data Exchange.
2. Create and assign privileges to the B2B Data Exchange production database and history database/repository users.

- For archive projects to or from the history database, configure the history database location and credentials in the client and server copies of the `dx-configuration.properties` file:

Property	Description
<code>dx.archive.jdbc.url</code>	<p>Location of the history database. You replace the default value with one of the following values:</p> <ul style="list-style-type: none"> <li>For Oracle, use the following format: <code>jdbc:informatica:oracle://&lt;oracle host&gt;:&lt;oracle port&gt;;SID=&lt;oracle sid&gt;</code></li> <li>For Microsoft SQL Server, use the following format: <code>jdbc:informatica:sqlserver://&lt;sqlserver host&gt;:&lt;sql server port&gt;;DatabaseName=&lt;database name&gt;</code></li> </ul> <p>The default value is <code>\${dx.archive.jdbc.url}</code>.</p>
<code>dx.archive.jdbc.username</code>	<p>Name of the history database user. You replace the default value with the database user name.</p> <p>The default value is: <code>\${dx.archive.jdbc.username}</code></p>
<code>dx.archive.jdbc.password</code>	<p>Encrypted password for the history database user. You encrypt the password with the password encryption utility and replace the default value with the encrypted string.</p> <p>The default value is: <code>\${dx.archive.jdbc.password}</code></p>

**Note:** To determine the specific location and credentials for the history database, consult the database administrator.

- To enable archiving document attachments, copy the library file from the folder `<DX installation directory>/ILM-accelerator/lib` to the folder `<ILM installation directory>/webapp/WEB-INF/lib/`.
- In the Data Archive installation directory, open the `conf.properties` file and set the value of the following properties:
  - Set the value of the `informia.useDbViewsInSeamlessAccess` property to `false`.
  - Set the value of the `informia.proceduresToExecute.inArchiveFromHistory` property to `java://com.informatica.b2b.dx.ilm.MoveDXDocStoreDatabaseDAOImpl`.

**Note:** Back up the `conf.properties` file before you modify the property.
- Restart Data Archive.

## Database User Privileges

When you prepare the production database and history database, you assign database privileges to users according to the archive scenario requirements. Set up the database users before you install the accelerator and create archive projects.

**Note:** To avoid user conflicts, set up a unique database user for each database.

The following table describes the production database privileges to assign to the production database user:

Component	Privileges
Rows	<ul style="list-style-type: none"><li>- Select</li><li>- Insert</li><li>- Update</li><li>- Delete</li></ul>
Tables and views	<ul style="list-style-type: none"><li>- Create</li><li>- Alter</li><li>- Drop</li></ul>

The following table describes the history database privileges to assign to the history database user:

Component	Privileges
Rows	<ul style="list-style-type: none"><li>- Select</li><li>- Insert</li><li>- Update</li><li>- Delete</li></ul>
Tables and views	<ul style="list-style-type: none"><li>- Create</li><li>- Alter</li><li>- Drop</li></ul>
Synonyms and links	<ul style="list-style-type: none"><li>- Create</li><li>- Delete</li></ul>

In addition to the history database privileges, the history database user needs to access and modify rows in the production database.

The following table describes the production database privileges to assign to the history database user:

Component	Privileges
Rows	<ul style="list-style-type: none"><li>- Select</li><li>- Insert</li><li>- Update</li><li>- Delete</li></ul>

## Installing the B2B Data Exchange Accelerator for Data Archive

Install the B2B Data Exchange accelerator for Data Archive after you install B2B Data Exchange and Data Archive.

Before you install the accelerator, install Data Archive and follow the pre-installation steps.

The minimum supported version of Data Archive is 6.1. If you have Data Archive version 6.1 installed, also install EBF 11801 and EBF 11672.

If you have Data Archive version 5.3.6 installed, also install EBF 11152.

1. Log in to Data Archive with administrator privileges and click **Accelerators > Enterprise Data Manager**. The Enterprise Data Manager appears.
2. In the Enterprise Data Manager, click **File > Import > Accelerator**. The **Import Metadata Options** window appears.
3. Select **Continue Import through EDM** and click **OK**.
4. Navigate to the location `<DXInstallationDir>/ILM-accelerator` and select to import all the XML files in the directory.

**Note:** Do not import the sub-folders in the directory.

The Enterprise Data Manager displays a progress window during the import process.

5. To verify the import process, restart the Enterprise Data Manager and make sure that the accelerator appears in the **B2B Data ExchangeData Integration Hub** node of the Explorer pane.
6. To add the accelerator to drop-down lists in Data Archive, log in to the database with the B2B Data Exchange history databaserepository credentials and run the SQL script on the Data Archive repository. The script is located in one of the following locations:

Database	Path
Oracle	<code>&lt;DXInstallationDir&gt;/ILM-accelerator/sql/oracle_ilm_repository_update.sql</code>
Microsoft SQL Server	<code>&lt;DXInstallationDir&gt;ILM-accelerator/sql/sqlserver_ilm_repository_update.sql</code>

## Configuring the Data Archive Source Connection from Production Database to History Database

Configure the Data Archive source connection before you archive/purge events from the production database to the history database.

For information about creating source connections, see the *Data Archive Administrator Guide*.

**Note:** The production database and history database must use the same database system, either SQL Server or Oracle.

1. Log in to Accelerator.
2. Click **Administration > New Source Connection**.
3. Enter the database-specific connection properties.
4. Set the application version of the connection to **B2B Data Exchange 10.1**.
5. Set the property **Source / Staging Attachment Location** to the root path for the production document store.

The path is the same as the path defined for the B2B Data Exchange system property `dx.system.document.store.folder`.

6. Set the property **Target Attachment Location** to the path of a location that can hold the archived document store (history database).

The path is the same as the path defined for the B2B Data Exchange system property `dx.archive.document.store.folder`.



7. If the connection is to an SQL Server database, select the option **Compile ILM Functions**.

**Note:** The properties **Source / Staging Attachment Location** and **Target Attachment Location** cannot have the same value. Both locations must be accessible to the Data Archive archive process.

**Note:** The location specified in the **Source / Staging Attachment Location** property must be accessible to the Data Archive purge process.

## Source and Target Connections

You must create a connection for each source database that you want to archive data documents from. One source database is the database that stores the documents that you want to archive, the production database. For restore jobs, the source database is the history database, where the data was originally archived.

Create a connection to the source database from which you want to purge data documents.

There are two types of source connections, one to archive data from the production database to the history database, and the other from any database to the file archive.

You must also create a target connection for each database that you want to archive data to. The target database is the location where you want to archive data to.

There are two types of target connections, a connection to a target database, or to a file archive. The first one is used for mid-term storage, whereas the latter is used for long-term storage.

## Configuring the Data Archive Source Connection from Production Database to History Database

Configure the Data Archive source connection before you archive/purge events from the production database to the history database.

For information about creating source connections, see the *Data Archive Administrator Guide*.

**Note:** The production database and history database must use the same database system, either SQL Server or Oracle.

1. Log in to Accelerator.
2. Click **Administration > New Source Connection**.
3. Enter the database-specific connection properties.
4. Set the application version of the connection to **B2B Data Exchange 10.1**.
5. Set the property **Source / Staging Attachment Location** to the root path for the production document store.

The path is the same as the path defined for the B2B Data Exchange system property  
`dx.system.document.store.folder`.

6. Set the property **Target Attachment Location** to the path of a location that can hold the archived document store (history database).

The path is the same as the path defined for the B2B Data Exchange system property  
`dx.archive.document.store.folder`.

7. If the connection is to an SQL Server database, select the option **Compile ILM Functions**.

**Note:** The properties **Source / Staging Attachment Location** and **Target Attachment Location** cannot have the same value. Both locations must be accessible to the Data Archive archive process.

**Note:** The location specified in the **Source / Staging Attachment Location** property must be accessible to the Data Archive purge process.

## Configuring a Source Connection from History Database to Data Archive

Configure the Data Archive source connection from the history database to the data archive.

For information about creating source connections, see the *Data Archive Administrator Guide*.

1. Log in to Accelerator.
2. Click **Administration > New Source Connection**.
3. Enter the database-specific connection properties.
4. Set the application version of the connection to **B2B Data Exchange 10.1**.
5. Set the property **Source / Staging Attachment Location** to the root path for the history database. This is the same path as defined for the B2B Data Exchange system property `dx.archive.document.store.folder`. This value should match the value for the property **Target Attachment Location** for the connection to the production database.
6. Set the property **Target Attachment Location** to the path of a location that has sufficient space to temporarily store documents for the archived document store.
7. If the connection is to an SQL Server database, select the option **Compile ILM Functions**.
8. Set the property **Database Link To Production** to the same path as the history database target connection.

**Note:** The properties **Source / Staging Attachment Location** and **Target Attachment Location** cannot have the same value. Both locations must be accessible to the Data Archive archive process.

## Configuring a Source Connection from Production Database to File Archive

Configure the Data Archive source connection from the production database to the file archive.

For information about creating source connections, see the *Data Archive Administrator Guide*.

**Note:** The production database and history database must use the same database system, either SQL Server or Oracle.

1. Log in to Accelerator.
2. Click **Administration > New Source Connection**.
3. Enter the database-specific connection properties.
4. Set the application version of the connection to **B2B Data Exchange 10.1**.
5. Set the property **Source / Staging Attachment Location** to the root path for the document store. This is the same path as defined for the B2B Data Exchange system property `dx.system.document.store.folder`.
6. Set the property **Target Attachment Location** to the path of a location that has sufficient space to temporarily store documents for the archived document store.
7. If the connection is to an SQL Server database, select the option **Compile ILM Functions**.

**Note:** The properties **Source / Staging Attachment Location** and **Target Attachment Location** cannot have the same value. Both locations must be accessible to the Data Archive archive process.

## Configuring a Target Connection from Production Database to History Database

Configure the Data Archive target connection from the production database to the history database.

For information about creating target connections, see the *Data Archive Administrator Guide*.

1. Log in to Accelerator.
2. Click **Administration > New Target Connection**.
3. Enter the database-specific connection properties.
4. Set the application version of the connection to **B2B Data Exchange 10.1**.
5. Define the property **Database Link To Source**.

The database link is used to access the meta-data tables from the production database. Consult with your database administrator regarding how to set up a database link.

**Note:** If the link server name contains special characters enclose the special character with double quotes.

## Configuring a Target Connection from History Database to File Archive

Configure the Data Archive target connection from the history database to the file archive.

For information about creating target connections, see the *Data Archive Administrator Guide*.

1. Log in to Accelerator.
2. Click **Administration > New Target Connection**.
3. Enter the database-specific connection properties.
4. Set the application version of the connection to **B2B Data Exchange 10.1**.
5. Define the connection type as **Optimized File**.
6. Disable the option **Use Mined Source Schema**.

## Configuring a Target Connection from Production Database to File Archive

Configure the Data Archive target connection from the production database to the file archive.

For information about creating target connections, see the *Data Archive Administrator Guide*.

1. Log in to Accelerator.
2. Click **Administration > New Target Connection**.
3. Enter the database-specific connection properties.
4. Set the application version of the connection to **B2B Data Exchange 10.1**.
5. Define the connection type as **Optimized File**.
6. Disable the option **Use Mined Source Schema**.

# Securing Data Archive Connections

Secure the Data Archive source connections so that only specific users can use and access the connections.

Access roles determine the data that users can access in Data Discovery searches. You use the Data Discovery portal to search for documents that are archived to the Data Archive. Access roles also restrict which users can view and download files that contain exported search results. Users can only download the exported files if the user is assigned to the same access role as the entity.

To secure source connections, first create an access role and associate it with an entity, then assign the access role to a user. Next, create a security group and assign the users that are allowed to access the B2B Data Exchange repository (production) source connection to the group.

## Configuring and Assigning the B2B Data Exchange and FAS Access Roles

Access roles determine the data that users can access in Data Discovery searches. Users can only download the exported files if the user is assigned to the same access role as the entity. Create an access role and associate it with an entity, then assign the access role to a user.

Create an access role associated with the entity production database, and an access role associated with the entity FAS production database, and then assign the access roles to users.

1. Log in to Accelerator.
2. Click **Administration > Manage Roles**.
3. Click **New Role**.  
The role name cannot contain special characters.
4. Click **Assign Role to New Entity** and provide the name **B2B Data Exchange Access Role**.  
The name cannot contain special characters.
5. For **Application Version** select **B2B Data Exchange 10.1**.
6. For **Application** select **DX\_SCHEMA B2B Data Exchange Database**.
7. For **Entity Name** type **Processing Data**.
8. To create a second entity named **FAS Processing Data**, click **Add Role**.
9. Click **Assign Role to New Entity** and provide a name, for example **FAS Access Role**.  
The name cannot contain special characters.
10. For **Application Version** select **B2B Data Exchange 10.1**.
11. For **Application** select **DX\_SCHEMA B2B Data Exchange Database**.
12. For **Entity Name** type **FAS Processing Data**.
13. To assign the **B2B Data Exchange Access Role** entity to a user, click **Administration > Manage Roles**.
14. Select a user and click the **Edit** icon next to the user.  
The **Edit User** page appears.
15. Click **Add Role**.
16. For **Product** select **Data Archive**.
17. For **Role** select **B2B Data Exchange Access Role**.
18. Click **Save**.
19. To assign the **FAS Access Role** entity to a user, click **Administration > Manage Roles**.

20. Select a user and click the **Edit** icon next to the user.  
The **Edit User** page appears.
21. Click **Add Role**.
22. For **Product** select **Data Archive**.
23. For **Role** select **FAS Access Role**.
24. Click **Save**.

## Assign a Connection to a Security Group

Assign a connection to a security group.

1. Log in to Accelerator.
2. Click **Administration > Manage Security Groups**.
3. Click **New Security Group**.  
The **Create or Edit a Security Group** page appears.
4. Name the security group, for example **B2B Data Exchange Security Group**.
5. Select the source connection to the production database.
6. Click **Add Permission**.  
A window appears with a list of defined permissions.
7. Select the permission and click **Select**.  
The permission appears in the list of permissions.
8. Select **Application** and for the value select **DX\_SCHEMA B2B Data Exchange Database**.
9. Click **Add User**.  
A window appears with a list of users.
10. Select the users that are allowed to access the B2B Data Exchange repository source connection and click **Select**.  
The user appears in the list of users.
11. Enter the user properties.
12. Click **Save**.
13. Follow the same steps for the connection to the history database.

## Creating the History Database Tables and Indexes

Create tables and indexes in the history database is required when you create the seamless access layer, and to assure optimized performance.

1. Log in to Accelerator.
2. Select **Jobs > Schedule a Job**.
3. In the **Projects/Programs to Run** area select **Standalone Programs**, and click **Add Item**.  
The **Program** dialog box appears.
4. Select **Create Tables**, and click **Select**.

5. Select the source repository.
6. Select the target history database as the destination repository.
7. In the **Schedule** area, select the option to run once or start the job immediately.
8. Click **Schedule**.

**Note:** When the program Create Indexes runs, it prevents the same events from being archived multiple times into the same history database. Several constraints are added to the history database to represent primary keys.

## Create the Seamless Access Layer for the History Database

Create the seamless access layer after you run an archive job or pre-create the tables for the history database.

The database administrator creates the seamless access layer by executing the relevant script located in `<DX installation directory>/ILM-accelerator/sql:`

1. For Oracle: `oracle_seamless_access_script.sql`
2. For SQL Server: `sqlserver_seamless_access_script.sql`

Replace the following system variables in the script:

1. Replace `&linkName` with the database link.
2. Replace `&databaseName` with the schema name of the production database.

The program `Create Seamless Data Access` performs a similar function as the scripts. However, the scripts generate a proper view for in-lining certain entity names, such as partner name, with the event table, when data is archived to the file archive. This in-lining allows you to find events based on partner or account name.

## Creating a File Archive User

You must create a file archive user before you create a file archive folder. The file archive user can access the file archive folder.

### Data Archive 5.3.6

Create a file archive user with the `sa_user` role.

To create a user, run the following command with the `npa_admin` tool:

```
add_user <username>, <password>
```

The user must be able to query the NPA system data. To enable this capability, run the following command with the `npa_admin` tool:

```
add_user_role dxarchive, query, npa_system
```

## Data Archive 6.1

To create a file archive user, perform the following steps:

1. Login to the FAS service using SSASQL, for example with the following command:

```
SSASQL meta meta dba/dba
```

2. To create a user, type the following command:

```
create authorization dx_fas /dx_fas
```

3. To assign DBA privileges, type the following command:

```
cgrant DBA to dx_fas
```

4. To commit the changes, type the following command:

```
commit
```

# Creating a File Archive Folder

In Data Archive, select and run the `Create Archive Folder` program to create the file archive folder and initialize the file archive.

When you run the `Create Archive Folder` program, define the target connection.

# Creating an Archive Job

To set up an archive job for a production or history database, perform the following task.

1. Log in to Accelerator.
2. Click **Workbench > Manage Archive Projects**.
3. Click **New Archive Project**.
4. Provide a name for the project.
5. Set the action to **Archive and Purge**.

This option removes data from the B2B Data Exchange repository after they are archived and also ensures that by-reference documents are archived and then deleted.

6. Select the source and target connections.
7. If the target is a file archive, then only select the option **Include Reference Data**.

This option ensures that important reference data, such as partner names and account numbers, are also stored in the file archive for each archived event.

8. Click **Next**.
9. Click **Add Entity**.
  - If the target connection is a database, select the entity **Processing Data**.
  - If the target connection is the File Archive Service, select **FAS Processing Data**.
10. Set **Role** to the access role created in [“Configuring and Assigning the B2B Data Exchange and FAS Access Roles” on page 164](#).
11. Set the archive job parameters.

For more information, see [“Archive Job Parameters” on page 168](#).

12. Click **Next**.
13. To save the project only, click **Publish**.
14. To save the project and immediately schedule a run, click **Publish and Schedule**.

## Archive Job Parameters

The following list contains archive job parameters. The parameters `Event Age`, `Include with reconcile status`, and `Include intermediate documents` apply to the whole event hierarchy. Other parameters apply to the root event of the hierarchy.

### Event Age

Required. Specifies how old an event must be, in days, before it is archived. For example, if the event was created on 2011-09-01 and the date on which the archive job runs is 2011-09-06, then the age of the event is 5 days. If a value of zero is supplied, then all the events are archived regardless of their age. The event age is counted in the number of whole days. An event created at 01:00 hours or at 23:00 hours on the same day will have the same age in days.

### Partner

Optional. The partner to which the root of the event hierarchy must belong. If the root does not belong to the given partner, then that hierarchy is not archived. The partners in the rest of hierarchy (on the child events) do not have to be same partner.

### Account

Optional. The account with which the root event of the event hierarchy is associated. If the root event is not related to the given account, then that hierarchy is not archived. The accounts in the rest of hierarchy (on the child events) do not have to be related to the same account.

You can only select an account that is associated with the chosen partner. It is not possible to select an account before choosing a partner.

### Event Type

Optional. The event type required for the root event of the event hierarchy. If the root event does not match the event type, the hierarchy is not archived. Other events in the hierarchy do not have to match the event type.

### Event Status

Optional. The event status required for the root event of the event hierarchy. If the root event does not match the status, the hierarchy is not archived. If this parameter is selected, the status of any event except the root event is ignored. If no value is specified, then all the events in the hierarchy must have a final status.

### Reconciliation Status

Optional. The reconciliation status required for the associated correlation tickets, before the event is archived. The reconciliation tickets can have the following possible status groups:

#### Any

The ticket status is ignored.

#### Closed

All the tickets completed normally or are closed after time-out.



### **Closed and Timed-out**

All the tickets completed normally or are closed after time-out. If a ticket timed-out, then this status applies.

### **Root Events Without Partners**

Required. In some scenarios, events that are created are not associated with a partner. This option allows those events to be archived. Enabling this option means that events with no associated partner are archived together for the selected partner or account.

### **Intermediate Documents**

Required. Defines whether the archive job archives intermediate documents or log blobs.

Specifying `no` would result in data loss, as intermediate documents will not be copied to the archive but just deleted.

## Scheduling Archive Jobs

Archive job scheduling depends on the type of archive job. Database to database archiving is performed when you archive from the production database to the history database. Database to file archiving is performed when you archive from the production database to the file archive, or from the history database to file archive.

### Scheduling Archiving from the Production Database to History Database

Perform the following steps to archive files from the production database to the history database.

1. Log in to Accelerator.
2. Select **Jobs > Schedule a Job**.
3. Select **Projects** and click **Add Item**.
4. From the Programs list, select the production to history database program that you want to schedule, according to the database type.
5. Select **Standalone Programs** and click **Add Item**.
6. From the Programs list, select **Create Indexes**.
7. Select the source and target connections that are configured for the archive project.
8. Define relevant schedule parameters.
9. Click **Schedule**.

### Archiving from a Database to the File Archive

To archive documents from the history database to the file archive, or from the production database to the file archive you schedule the following programs:

1. Archive the B2B Data Exchange repository and move the files from the database document store to the staging area.
2. Load the archived data into the file archive.

3. Load the documents from the staging area into the file archive.

## Scheduling Archiving from a Database to the File Archive

Perform the following steps to archive the production or history database to the file archive.

1. Log in to Accelerator.
2. Select **Jobs > Schedule a Job**.
3. Select **Projects** and click **Add Item**.
4. To archive the B2B Data Exchange repository and move the files from the database document store to the staging area, from the Programs list, select the **DX <Database Type> Archive** program, according to the database type.
5. Select **Standalone Programs** and click **Add Item**.
6. To load the archived data into the file archive, from the Programs list, select **File Archive Loader**.
7. Ensure that the field **Archive Job Id** is empty.  
The value is determined when the program runs.
8. Select **Standalone Programs** and click **Add Item**.
9. To load the documents from the staging area into the file archive, from the Programs list, select **Load External Attachments**.
10. For the property **Directory** provide the same value as provided for the property **Target Attachment Location** from the source connection.
11. For the property **Target Archive Store** provide the same value as provided for the same property **Target Attachment Location** for the archive project.
12. Set the field **Purge after Load** to **Yes**.
13. Define relevant schedule parameters.
14. Click **Schedule**.
15. If the job is not scheduled to run immediately, you can view the job if you select **Jobs > Manage Jobs. Schedule**.

## Viewing Archived Events

You can view archived events in the B2B Data Exchange Operations Console, or the Data Archive Data Discovery portal.

Before you view archived events in the Operations Console, configure the relevant system properties and assign user privileges.

Alternatively, you can use the Data Discovery portal to view archived events. Use the Data Discovery portal to search for and view events and their details.

Use the **Browse Data** option to find information directly associated with the event itself, for example the start and complete time. This option provides a direct view of all the data that is available in the archived B2B Data Exchange repository.

Use the **Search File Archive** option to search for data based on archived top-level entities. The difference between the **Search File Archive** option and the **Browse Data** option is that with the first search you can easily drill down to the data associated with an event, for example to event blobs.

You can also use the Data Discovery portal to view archived events for by-reference documents.

## Configuring B2B Data Exchange System Properties

Before you can view the archived events from the history database in the B2B Data Exchange Operations Console, you must update the relevant system properties.

Modify the following files:

```
<DXInstallationDir>/conf/dx-configuration.properties  
<DXInstallationDir>/DataExchangeDataIntegrationHub/tomcat/shared/classes/dx-configuration.properties
```

Back up the files before you update them.

1. Go to the following directory and locate the file named dx-configuration.properties:

```
<DXInstallationDir>/conf/
```

2. Use a text editor to open the file.

3. Search for the following text:

```
dx.archive.jdbc.url
```

Set this value to the location of the history database.

4. Search for the following text:

```
dx.archive.jdbc.username
```

Set this value to the user name for the user enabled to access the history database.

5. Search for the following text:

```
dx.archive.jdbc.password
```

Set this value to the password for the user enabled to access the history database.

6. Add the following parameter:

```
dx.archive.document.store.folder
```

Set this value to the location where the pass-by-reference documents are archived.

7. Save the dx-configuration.properties file.

B2B Data Exchange maintains two copies of the dx-configuration.properties. The contents of the files must be identical.

8. Copy the updated dx-configuration.properties file to the following directory:

```
<DXInstallationDir>/DataExchangeDataIntegrationHub/tomcat/shared/classes/
```

9. Restart B2B Data Exchange.

## Viewing Archived Events in the B2B Data Exchange Operations Console

After you update the relevant system properties, you can view events archived in the history database through the B2B Data Exchange Operations Console.

1. In the B2B Data Exchange Operations Console Navigator, click **Administration > User Groups**. The **User Groups** page appears.
2. Create a user group and enable the Operator privilege **View Archived Events**.
3. Assign relevant users to the user group.
4. When an Operator with the relevant permissions logs into B2B Data Exchange, in the **Events** section of the Operations Console, the option **View Archived Events** appears.

## Browsing Data with the Data Discovery Portal

Use the Data Discovery portal to search for and view events and their details. Use the **Browse Data** option to find information directly associated with the event itself, for example the start and complete time. This option provides a direct view of all the data that is available in the archived B2B Data Exchange repository.

1. Log in to Accelerator.
2. Click **Data Discovery > Browse Data**.  
The **Browse Data** page appears.
3. For the **Archive Folder**, select the relevant FAS folder.
4. For the **Entity**, select **FAS Processing Data**.
5. Select **Table** to search.
6. Expand the **Data Columns** section.
7. In the **Available Columns** panel, select the columns to be present in the search results.
8. In the **Where Clause** panel, add any SQL conditions that need to be applied to the search. To check the SQL query, click **Preview SQL**.
9. Click **Search**.  
The results panel appears with a list of the columns in each table in the entity.
10. To export the data, select **CSV** or **SQL** and then click **Export**.

## Defining Search Options to Search the File Archive with the Data Discovery Portal

You can use the **Search File Archive** option to search for data based on archived top-level entities, which are for B2B Data Exchange-only events.

Before you use the **Search File Archive** option, set up the search options.

1. Log in to Accelerator.
2. Click **Data Discovery > Search Options**.  
The **View Search Options** page appears.
3. For **Application Version**, select **B2B Data Exchange 10.1**.
4. For **Application**, select **DX\_SCHEMA B2B Data Exchange Database**.
5. For **Entity**, select **FAS Processing Data**.
6. Click **Edit**.  
The **Edit Search Options** page appears with a list of the columns in each table in the entity.
7. Click **Add Entity Table** and select **DX\_VIEW\_ARCHIVE\_EVENT**.
8. In the **Event** table ensure that you do not select anything in the columns **Display**, **Search**, and **Sort**.
9. In the **DX\_VIEW\_ARCHIVE\_EVENT** table, in the columns **Display**, **Search**, and **Sort**, select the columns to be displayed, searched and sorted.  
It is recommended to select all the columns, and then deselect **H\_LEVEL**, **SAVEPOINT\_ID**, and **CORRELATION\_STATE**.
10. Click **Save**.

## Searching the File Archive with the Data Discovery Portal

After you set up search options, you can use the **Search File Archive** option to search for data based on archived top-level entities. The difference between the **Search File Archive** option and the **Browse Data** option is that with the first search you can easily drill down to the data associated with an event, for example to event blobs.

1. Log in to Accelerator.
2. Click **Data Discovery > Search File Archive**.  
The **Search File Archive** page appears.
3. For the **Archive Folder**, select the FAS archive folder.
4. For **Entity**, select **DX\_VIEW\_ARCHIVE\_EVENT**.
5. Select the search parameters.  
For more information, see the *Data Archive Administrator Guide*.
6. Click **View**.  
The **Search Results** pane appears with a list of the columns related to the entity.
7. To view additional information about a selected event, click **View Archived Data** or **Technical View**.  
In the **DX\_EVENT\_BLOBS** table, there are links to the data in the **OBJECT** column. The data cannot be viewed directly as it largely contains binary data.
8. To export selected data, click **Export Data**. To export all data, click **Export All Data**.

## Configuring and Assigning the By-Reference Access Role

Before you can view archived by-reference documents, the entity that holds the archived documents must be accessible. Create an access role and associate it with an entity, then assign the access role to a user.

The application **External Attachments** and entity **AM\_ATTACHMENT\_ENTITY** are automatically created, when the program `Load External Attachments` is run.

1. Log in to Accelerator.
2. Click **Administration > Manage Roles**.
3. Click **New Role**.  
The role name cannot contain special characters.
4. Click **Assign Role to New Entity** and provide the name **By Reference Access Role**.  
The name cannot contain special characters.
5. For **Application Version** select **B2B Data Exchange 10.1**.
6. For **Application** select **External Attachment**.
7. For **Entity Name** type **AM\_ATTACHMENT\_ENTITY**.
8. To assign the **By Reference Access Role** entity to a user, click **Administration > Manage Roles**.
9. Select a user and click the **Edit** icon next to the user.  
The **Edit User** page appears.
10. Click **Add Role**.
11. For **Product** select **Data Archive**.
12. For **Role** select **By Reference Access Role**.
13. Click **Save**.

## Viewing Archived By-Reference Documents

Enter a short description of the task here (optional).

1. Log in to Accelerator.
2. Click **Data Discovery > Search File Archive**.  
The **Search File Archive** page appears.
3. For the **Archive Folder**, select the FAS archive folder.
4. For **Entity**, select **DX\_VIEW\_ARCHIVE\_EVENT**.
5. Select the search parameters.  
For more information, see the *Data Archive Administrator Guide*.
6. Click **View**.  
The **Search Results** pane appears with a list of the columns related to the entity.
7. To view additional information about a selected event, click **View Archived Data** or **Technical View**.
8. In the **DX\_EVENT\_BLOBS** table, find the event blob file name in the **FULL\_FILE\_NAME** column. Select the last two elements in the file path, that is the file name and directory.
9. To find the by-reference documents, start another search. Click **Data Discovery > Search File Archive**.  
The **Search File Archive** page appears.
10. For the **Archive Folder**, select the same archive folder.
11. For **Entity**, select **AM\_ATTACHMENT\_ENTITY**.
12. For **Table**, select **AM\_ATTACHMENT**.
13. Select the search parameters. For the first search row, select **Attachment Directory** with the operator **Contains**. For the next value, supply the name of the directory in which the event blob file is located.
14. Add a second search row. Select **Attachment Name** with the operator **Contains**. For the next value, supply the event blob file name.
15. Click **View**.  
The results panel appears with a list of the columns in each table in the entity.
16. To view or download the original event blob file, click **Click to view** in the **Attachment Data** column.

## Limitations

The following limitations apply to the Data Archive Accelerator.

- By-reference document are only moved from the document store if the archive job is configured with the `Archive and Purge` option. With the `Archive Only` option, the documents remain in the document store, and are not copied to the history database or the staging area for inclusion in the File Archive.
- The document store is moved synchronously with the archive task. The property `Move Attachments in Synchronous Mode` has no meaning for B2B Data Exchange repository archive jobs.
- If the document store is moved, then the property `Source / Staging Attachment Location` for the source connection must also be updated.

- Running an archive job with the `Archive Only` is not supported, as this can lead to duplicate events in the history database. It might cause the B2B Data Exchange Operations Console Archived Events view to be unable to show the event details.
- If the program `Create Indexes` is run on the history database, then the archive job might end in an error state. The program `Create Indexes` adds uniqueness constraints to simulate indexed primary keys which would causes the error.
- If the `drop target indexes` property is selected for a target connection, then the program `create indexes` must be run after each archive job.
- If you use Oracle databases, the history database user must be able to create tables, views, and synonyms. The user must have the following privileges: `CONNECT`, `RESOURCE`, `CREATE VIEW`, and `CREATE SYNONYM`.

# CHAPTER 11

## Uninstallation

This chapter includes the following topics:

- [Uninstallation Overview, 176](#)
- [Uninstalling B2B Data Exchange from Windows Operating Systems, 176](#)
- [Uninstalling B2B Data Exchange from UNIX Operating Systems, 177](#)

### Uninstallation Overview

Uninstall B2B Data Exchange to remove the core application and additional components that you installed on the machine.

The uninstallation process does not delete the repositories or the B2B Data Exchange document store.

The uninstallation process depends on the operating system on which B2B Data Exchange is installed, Windows or UNIX.

### Uninstalling B2B Data Exchange from Windows Operating Systems

1. Stop all B2B Data Exchange services.
2. In the Add/Remove Programs control panel, right-click **B2B Data Exchange** and select **Uninstall**.  
The **Uninstall B2B Data Exchange** wizard appears.
3. Click **Next**.  
The **Pre-Uninstall Summary** screen appears.
4. Click **Uninstall**.  
The **Uninstall B2B Data Exchange** screen displays the progress of the uninstallation process. When the uninstallation process ends, the **Uninstall Complete** screen appears.
5. Click **Done** to close the wizard.



# Uninstalling B2B Data Exchange from UNIX Operating Systems

1. Stop all B2B Data Exchange services.
2. Run the Uninstall.exe file from the B2B Data Exchange installation directory.  
The **Uninstall B2B Data Exchange** section appears.
3. Click **Next**.  
The **Pre-Uninstall Summary** section appears.
4. Click **Uninstall**.  
The uninstaller displays the progress of the uninstallation process. When the uninstallation process ends, the **Uninstall Complete** section appears.
5. Click **Done** to exit the uninstaller.

# INDEX

## A

- access role
  - by-reference [173](#)
- after you upgrade
  - description [126](#)
  - reapply configuration modifications [128](#)
  - tasks [126](#)
- archive job
  - create [167](#)
  - parameters [168](#)
- archived events
  - viewing [170](#)
- archiving
  - scheduling [170](#)
  - steps [169](#)
- authentication mode
  - Informatica platform [69](#)
  - native [69](#)

## B

- before you upgrade
  - description [95](#)
  - tasks [95](#)
- branding
  - Partners Portal [82](#), [84](#), [131](#)
- browser
  - minimum system requirements [17](#), [83](#)

## C

- configuration
  - JAAS authentication [70](#)
  - Java heap size [146](#)
  - SNMP logs [143](#)
- configuring
  - Partners Portal [92](#)
- connection
  - assign to security group [165](#)
  - data archive
    - assign connection to security group [165](#)
- connections
  - repositories [78](#)
- credentials
  - changing for Data Integration Hub Hadoop Service [149](#)
  - changing for repository user account [147](#)

## D

- Dashboard and reports
  - importing operational data store event loader workflow [81](#)

- data archive
  - archive job parameters [168](#)
  - archiving steps [169](#), [170](#)
  - configure access role [164](#)
  - configure security [173](#)
  - configure source connection [160](#)–[162](#)
  - configure target connection [163](#)
  - create archive job [167](#)
  - create seamless access layer [166](#)
  - data discovery portal [172](#)–[174](#)
  - history database [165](#)
  - limitations [174](#)
  - view archived events [170](#)
- Data Archive
  - create file archive user [166](#)
  - installing the B2B Data Exchange accelerator [157](#), [159](#)
  - installing the Data Integration Hub accelerator [157](#), [159](#)
- data discovery portal
  - browse data [172](#)
  - by-reference documents [174](#)
  - search options [172](#)–[174](#)
- Data Integration Hub Hadoop Service
  - changing the credentials [149](#)
- document store
  - setting up [20](#)

## E

- email notification
  - configuring the mail server [79](#)
- event archiving
  - Data Archive [157](#), [159](#)
- event purging
  - Data Archive [157](#), [159](#)

## F

- file archive
  - create folder [167](#)
  - data archive
    - create file archive folder [167](#)
- firewall
  - Partners Portal [21](#), [96](#)

## H

- Hadoop
  - configuration files [75](#)
- history database
  - create tables and indexes [165](#)
- history database events
  - configure system properties [171](#)

history database events (*continued*)  
data archive  
viewing events in Operations Console [171](#)

## I

Informatica domain  
remote connection [71](#)  
Installation  
additional components [11](#)  
components [10](#)  
uninstalling from UNIX [177](#)  
uninstalling from Windows [176](#)  
installer requirements  
minimum system requirements [17, 83](#)

## J

JAAS authentication  
configuring [70](#)  
JNDI port number  
modifying [141](#)

## L

log files  
location [143](#)

## M

mail server  
configuring [79](#)  
minimum system requirements  
installer [17, 83](#)

## N

native  
authentication mode [69](#)  
notification  
configuring the mail server [79](#)

## O

opening ports  
Partners Portal [21, 96](#)  
operating system  
minimum system requirements [17, 83](#)  
operation console  
authentication [69](#)  
Operation Console  
JAAS authentication [70](#)  
logging in [77](#)

## P

partitions  
description [75](#)  
Partners Portal  
adding organization logo [82, 92, 131](#)  
branding [82, 84, 131](#)

Partners Portal (*continued*)  
configuring mail server [79](#)  
firewall [21, 96](#)  
install on non-B2B Data Exchange node [83, 85](#)  
logo specifications [82, 84, 131](#)  
opening ports [21, 96](#)  
requirements for installation on non-B2B Data Exchange node [84](#)  
Partners Portal installation on non-B2B Data Exchange node  
configure logo [92](#)  
installation [85](#)  
overview [83](#)  
requirements [84](#)  
set the Dashboard properties [93](#)  
UNIX operating system [90](#)  
Windows operating system [85](#)  
Partners Portal notifications  
configuring the mail server [79](#)  
port numbers  
default [15](#)  
server startup and shutdown [140](#)  
portal user group  
managing [130](#)  
post-installation  
changing host name [71](#)  
configure operation console authentication [69](#)  
configuring remote access [72](#)  
description [68](#)  
Hadoop publication repository [75](#)  
PowerCenter Integration Service [72, 151](#)  
registering PowerCenter server plug-in [70](#)  
set up database partitions [75](#)  
tasks [68](#)  
PowerCenter  
connections [78](#)  
prerequisite  
Data Transformation service [21](#)  
Microsoft SQL Database [21](#)  
pmrep [20](#)  
software [19](#)  
production data  
configure access role [164](#)

## R

remote connection  
Informatica domain [71](#)  
repositories  
connections [78](#)  
repository user account  
changing the credentials [147](#)  
requirements  
database [18](#)  
Partners Portal installation on non-B2B Data Exchange node [84](#)  
RMI port number  
modifying [140, 142](#)

## S

seamless access layer  
create [166](#)  
server startup and shutdown port  
modifying port number on Windows [140](#)  
services  
starting and stopping on Windows [136, 137](#)  
starting on UNIX [137](#)

- Single Sign On
  - creating key [153](#)
  - with Informatica Managed File Transfer [153](#)
- SNMP appender
  - add to file [145](#)
  - parameters [144](#)
- SNMP logs
  - configuration [143](#)
- source connection
  - configure [160-162](#)
- system requirements
  - user accounts [13](#)

## T

- target connection
  - configure [163](#)

## U

- user accounts
  - installation [13](#)